





LED SPOTLIGHT

It offers two heatsink options, with face cover choices including arc, bevel, straight, and round hole designs. Users can flexibly select based on their actual usage scenarios to achieve highly customized adaptation and diverse style expression.



1025Y3W series




Install hole size: Ø25mm

Part No of LED King	Colour	Beam Angle	Power	Input Current	Lumen (Lm)	CRI	IP Rang	Worok Life
1025Y3W-WW	2700K	15°	3W	700mA	280	≥90	IP20	30000h
1025Y3W-NW	3000K	24°			300			
1025Y3W-CW	4000K	35°			300			

1035Y5W series




Portfolio A

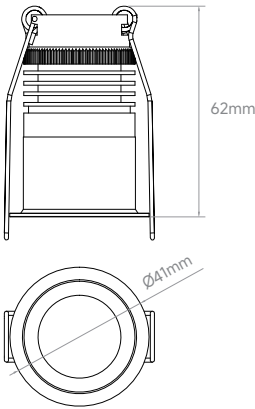

Install hole size: Ø35mm

Portfolio B

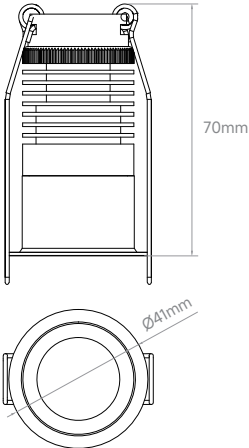

Install hole size: Ø35mm

Part No of LED King	Colour	Beam Angle	Power	Input Current	Lumen (Lm)	CRI	IP Rang	Worok Life
1035Y5W-WW	2700K	24°	5W	120mA	450	≥90	IP20	30000h
1035Y5W-NW	3000K	36°			480			
1035Y5W-CW	4000K	55°			480			




LED SPOTLIGHT

It offers two heatsink options, with face cover choices including arc, bevel, straight, and round hole designs.



Users can flexibly select based on their actual usage scenarios to achieve highly customized adaptation and diverse style expression.



1045Y7W series


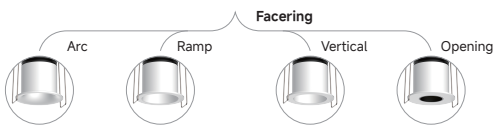


Portfolio A



Install hole size: Ø45mm


Portfolio B





Install hole size: Ø45mm

Part No of LED King	Colour	Beam Angle	Power	Input Current	Lumen (Lm)	CRI	IP Rang	Worok Life
1045Y7W-WW	2700K 3000K 4000K 5700K	24°	7W	180mA	600	≥90	IP20	30000h
1045Y7W-NW		36°			650			
1045Y7W-CW		55°			650			



1055Y9W series

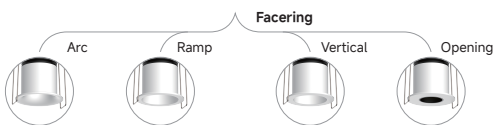

Portfolio A







Portfolio B




Part No of LED King	Colour	Beam Angle	Power	Input Current	Lumen (Lm)	CRI	IP Rang	Worok Life
1055Y9W-WW	2700K 3000K 4000K 5700K	24°	9W	200mA	800	≥90	IP20	30000h
1055Y9W-NW		36°			850			
1055Y9W-CW		55°			850			



Lighting Installation
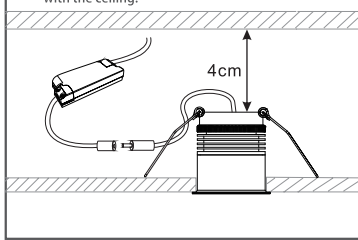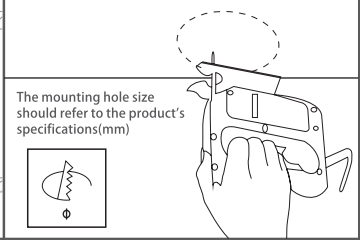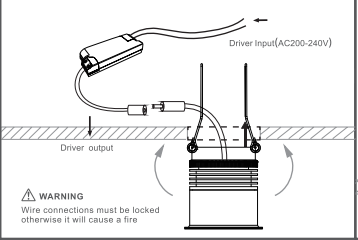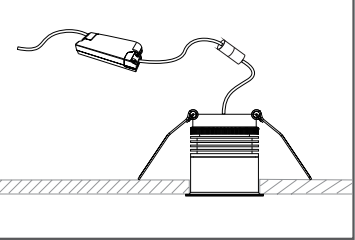
<p>1 Warning: Keep at least 4cm distances between the light with the ceiling.</p> 	<p>2 Measure the position for installation,make a hole in accordance with the cut-out size of the light.</p> <p>The mounting hole size should refer to the product's specifications(mm)</p> 	<p>3 Pull the spring clip upward in accordance with the picture, fixed to the mounting hole on the ceiling.</p>  <p>WARNING Wire connections must be locked otherwise it will cause a fire</p>	<p>4 Put through the power,if light on,then the installation be finished.</p> 
---	--	--	--



WARNING

- 1.LED is low voltage product,please try to avoid direct contact with the metal part of input wires on the lamp.
- 2.Input/Output wire for lamp and driver:Red wire for the anode,black wire for the cathode.
- 3.Please connect the light with electrical accessory first,then open the power.
- 4.If you do not buy our suitable electrical accessories,please buy the product which the constant current is fully consistent with our light's parameters.