

G12 MONO MODULE **N** TYPE

615W-635W

Premium Quality *Bifacial Dual Glass*

120 CELL

G12 MONO N-TYPE

22.44%

MAXIMUM EFFICIENCY

0 to +5W

POSITIVE POWER TOLERANCE



Higher Output of Power




For Environment For Future



Optimize the Temperature Coefficient



Reduce Equipment & Material Cost

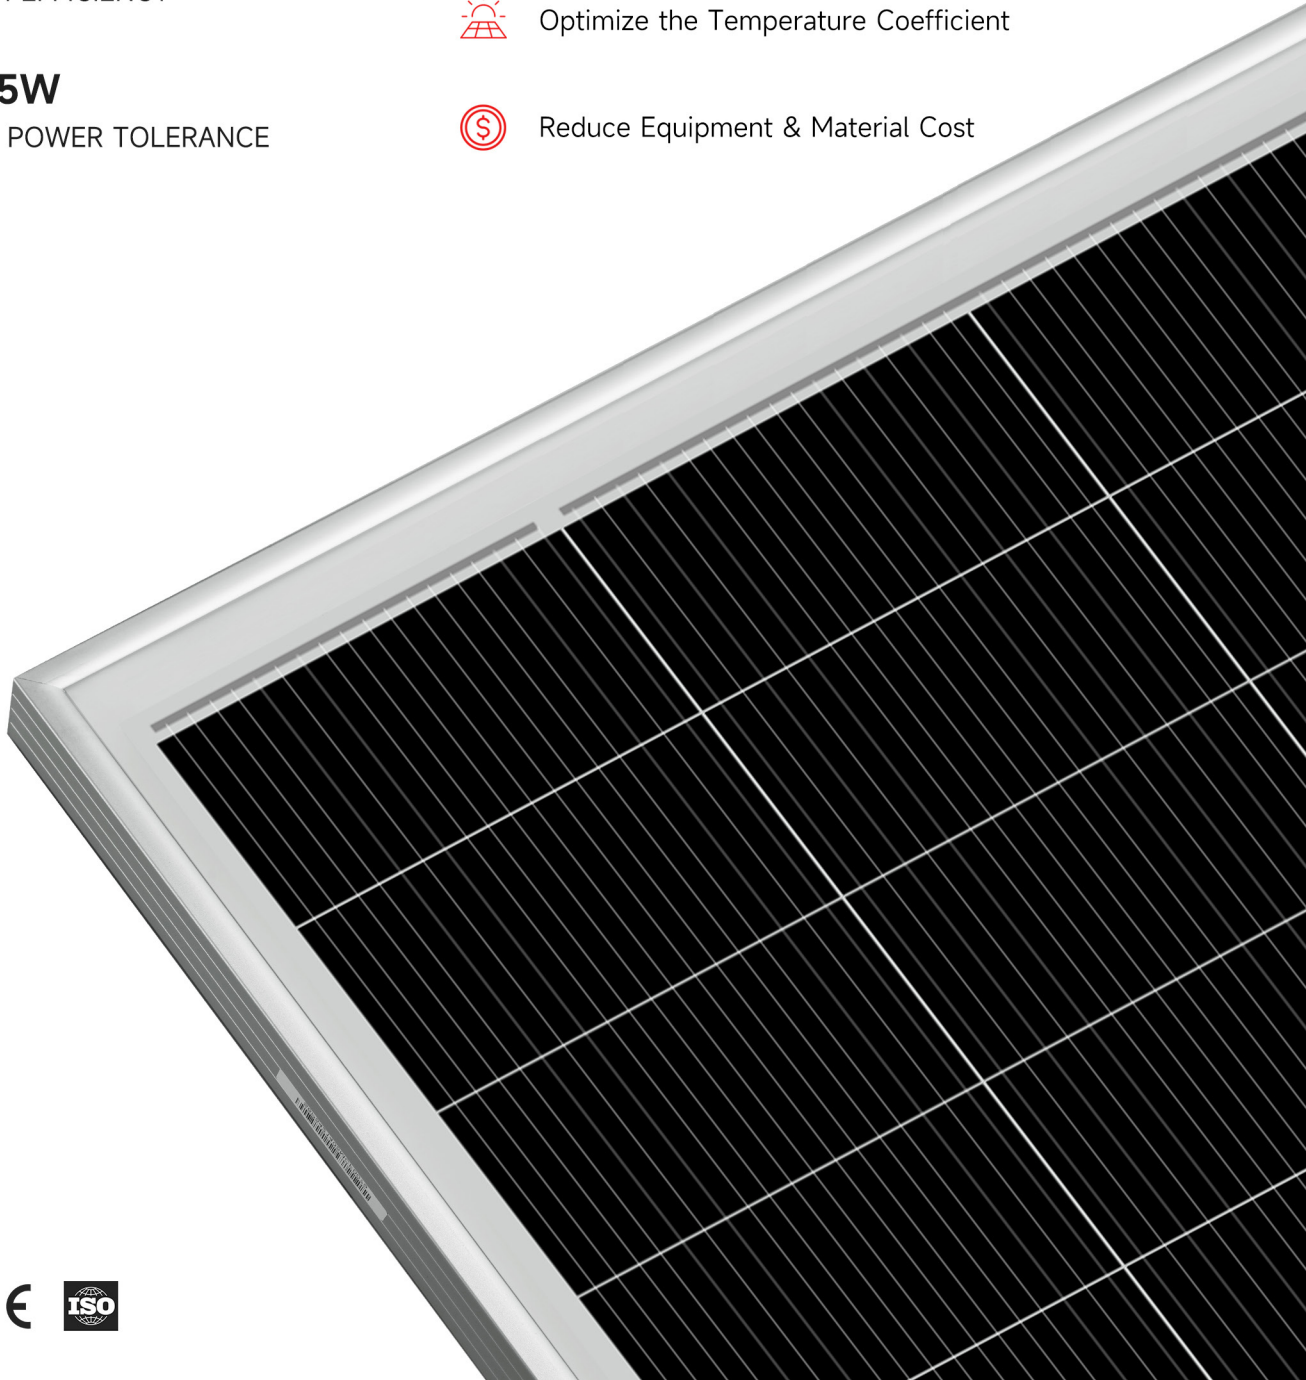


Module Type		PW-60M615HG12-BD		PW-60M620HG12-BD		PW-60M625HG12-BD		PW-60M630HG12-BD		PW-60M635HG12-BD	
		STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Test Environment		STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power	$P_{MAX}(W)$	615	464	620	468	625	472	630	476	635	479
Maximum Power Voltage	$V_{MPP}(V)$	35.5	33.5	35.7	33.7	35.9	33.9	36.1	34.1	36.3	34.3
Maximum Power Current	$I_{MPP}(A)$	17.33	13.86	17.37	13.89	17.41	13.93	17.46	13.96	17.50	13.99
Open Circuit Voltage	$V_{OC}(V)$	42.7	40.4	42.9	40.6	43.1	40.8	43.3	41.0	43.5	41.2
Short Circuit Current	$I_{SC}(A)$	18.26	14.72	18.31	14.77	18.36	14.81	18.41	14.85	18.46	14.89
Tolerance	(W)	0 - +5		0 - +5		0 - +5		0 - +5		0 - +5	
Module Efficiency	(%)	21.73		21.91		22.09		22.26		22.44	

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3. Average efficiency reduction of 4.5% at 200W/m² according to EN 60904-1
 NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

BIFACIAL OUTPUT-REAR SIDE POWER GAIN 10% FOR REFERENCE



Module Type	PW-60M615HG12-BD	PW-60M620HG12-BD	PW-60M625HG12-BD	PW-60M630HG12-BD	PW-60M635HG12-BD
Pmax (W)	676.5	682	687.5	693	698.5
Voc (V)	42.7	42.9	43.1	43.3	43.5
Isc (A)	20.13	20.18	20.23	20.28	20.33
Vmp (V)	35.5	35.7	35.9	36.1	36.3
Imp (A)	19.06	19.1	19.15	19.2	19.24

DIMENSIONS OF PV MODULE

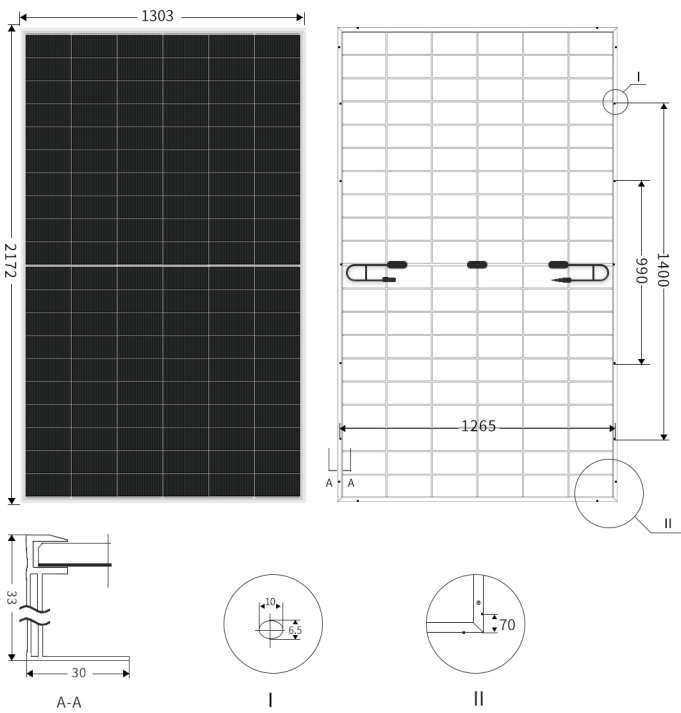

LINEAR PERFORMANCE WARRANTY

15 Year Product Warranty 30 Year Linear Power Warranty

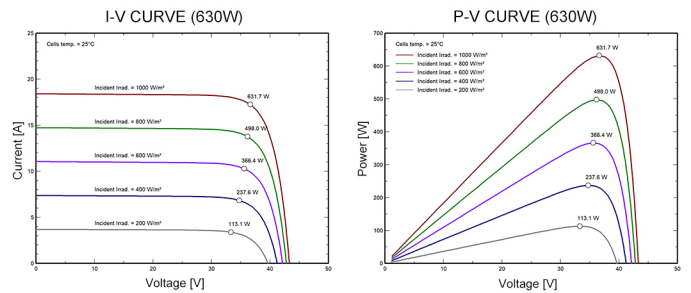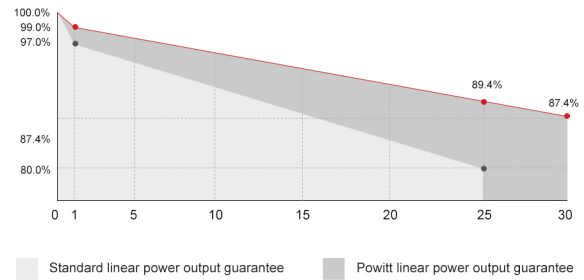

MECHANICAL DATA

Cell Type	Mono N-TYPE
No. of Cells	120 (6 x 20)
Module Dimensions	2172 x 1303 x 33mm
Weight	34.9kg
Front Glass	2.0mm
Back Glass	2.0mm
Frame	Anodized Aluminium Alloy
Junction Box	IP 68 Rated
Cables	4.0mm ² , 350mm or Customized Length
Connector	MC4 Compatible

TEMPERATURE RATINGS

Nominal Operating Cell Temperature(NOCT)	45±2°C
Temperature Coefficient of P _{MAX}	-0.30%/°C
Temperature Coefficient of V _{OC}	-0.25%/°C
Temperature Coefficient of I _{SC}	+0.046%/°C

MAXIMUM RATINGS

Operational Temperature	-40°C to +85°C
Maximum System Voltage	1500V DC
Max Series Fuse Rating	35A
Mechanical Load	5400pa
Wind Load	2400pa

PACKAGING CONFIGURATION 34 pcs/Pallet, 612 pcs/40'HQ



Powitt Solar Co.,Ltd
 www.powitt.com
 info@powitt.com
 +86 519 8899 2132

All rights reserved. Specifications included in this datasheet are subject to change without notice.
 Version No. PWS202311V03