

LINEAR LIGHT

LED KING PROVIDES COMPREHENSIVE INTELLIGENT LIGHTING FOR LINEAR LIGHTS.

A linear lights series that can be intelligently controlled.






















L0918W series








B Style







Part No of LED King	Power	Input	Lumen	Colour	CRI	IP Rang	Size
L0918WA	0.6M=9W 1.2M=18W	DC24V	120Lm/W	2700K	>92	IP20	600x20.3x27mm 1200x20.3x27mm
				3000K			
				4000K			
				6000K			
L0918WB	0.6M=9W 1.2M=18W	DC24V	120Lm/W	2700K	>92	IP20	600x20.3x27mm 1200x20.3x27mm
				3000K			
				4000K			
				6000K			



INSTALLATION: Wires Installation



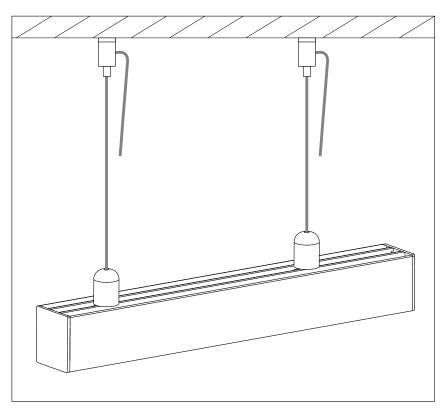

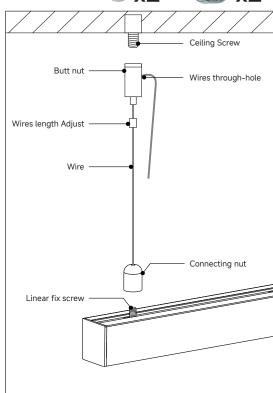

INSTALLATION: Hide Installation













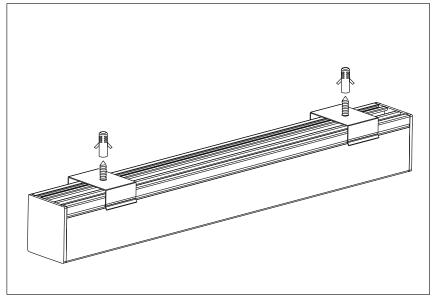






- 1.Only for indoor lighting, no outdoor lighting or using under the condition of vibration, dust or high humidity. Or it will easliy casue fire, electric shock or breakdown.
- $2. Power \, must \, be \, off \, before \, in stallation \, , \, cleanning \, , \, mending \, or \, replacement \, in \, case \, of \, electric \, shock \, or \, breakdown.$
- 3.Plese do not refit, add or change the accessories privataly in case of shortening the lifespan or cuasing safty problems.
- 4. Distance between the lights and objects by illumination should no less than 700mm.
- 5. Under no circumstances lights can not be coverd by cloth or other sinilar objects in case of fire or breakdown.
- 6. Once lights do not work properly, please turn off the power wire and get in contact with our agent or ask prefessional electrican to do the repairing in case of fire, falling or injury.





Туре	Length	Net Weight	QTY	Gross Weight	Demension
L0918WA/B	0.6m	0.21 kg	50PCS	12.2 kg	655x230x290 mm
	1.2m	0.42 kg	40PCS	18.5 kg	1250x230x265 mm

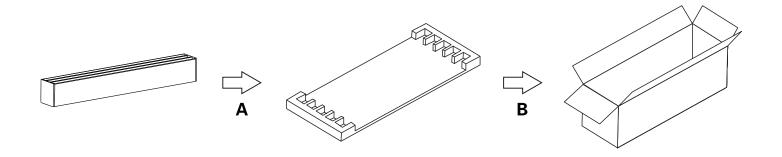

A: step to inside linear to EPE package.

B: step to put linears with EPE inside carton.