

LINEAR LIGHT

LED KING PROVIDES COMPREHENSIVE INTELLIGENT LIGHTING FOR LINEAR LIGHTS.


A linear lights series that can be intelligently controlled.




L1530W series




A Style





B Style



C Style





D Style

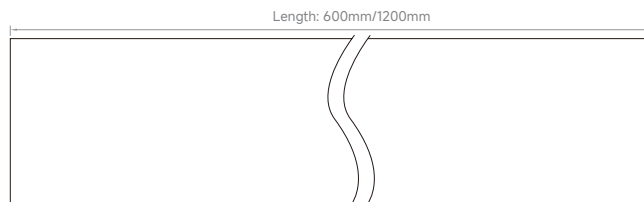



Part No of LED King	Power	Input	Lumen	Colour	CRI	IP Rang	Size
L1530WA	0.6M=15W 1.2M=30W	DC24V	>70Lm/W	2700K	>92	IP20	600x30x35mm 1200x30x35mm
				3000K			
				4000K			
				6000K			
L1530WB	0.6M=15W 1.2M=30W	DC24V	>60Lm/W	2700K	>92	IP20	600x30x35mm 1200x30x35mm
				3000K			
				4000K			
				6000K			
L1530WC	0.6M=15W 1.2M=30W	DC24V	>50Lm/W	2700K	>92	IP20	600x30x35mm 1200x30x35mm
				3000K			
				4000K			
				6000K			
L1530WD	0.6M=15W 1.2M=30W	DC24V	>30Lm/W	2700K	>92	IP20	600x30x35mm 1200x30x35mm
				3000K			
				4000K			
				6000K			



INSTALLATION: Wires Installation

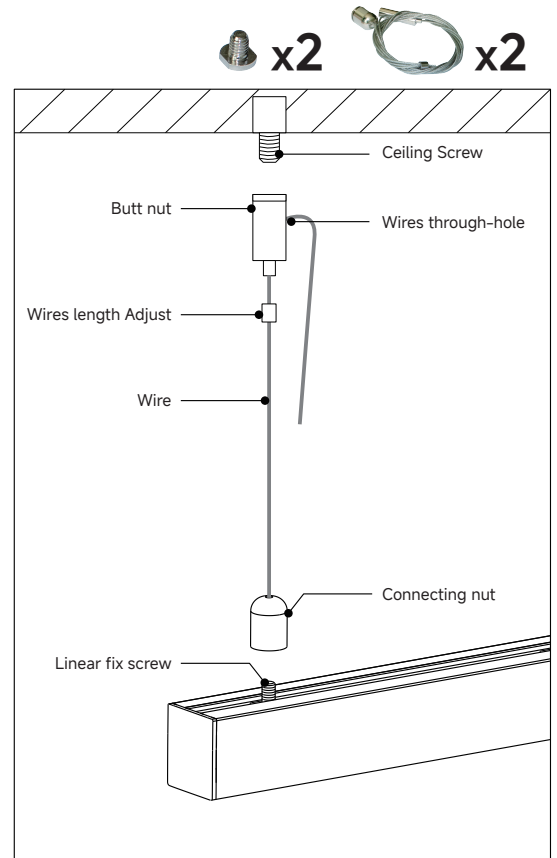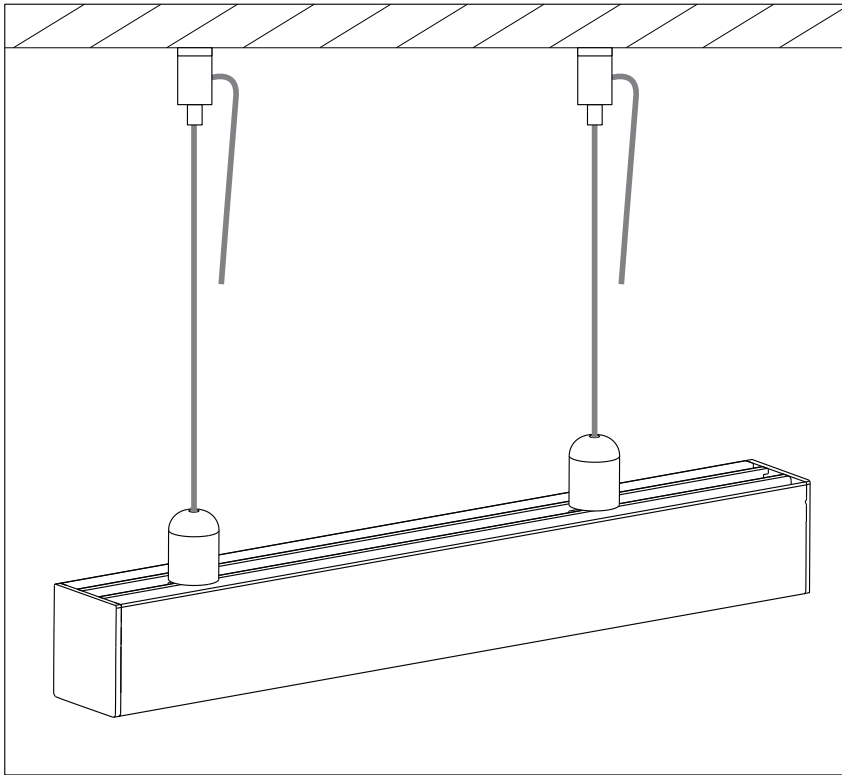

INSTALLATION: Hide Installation

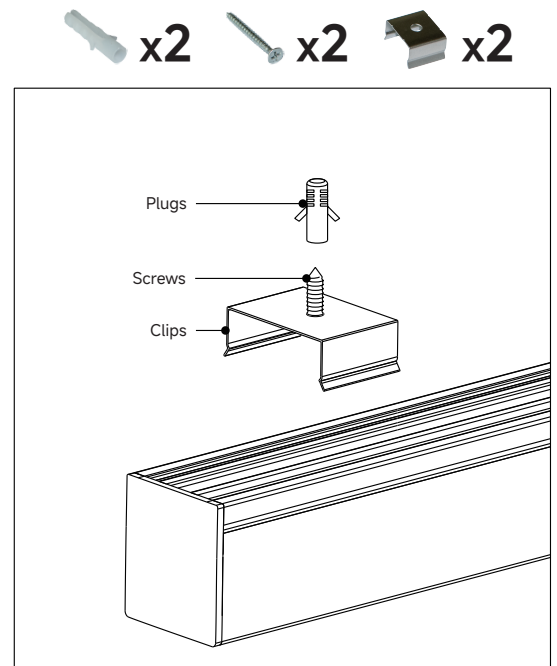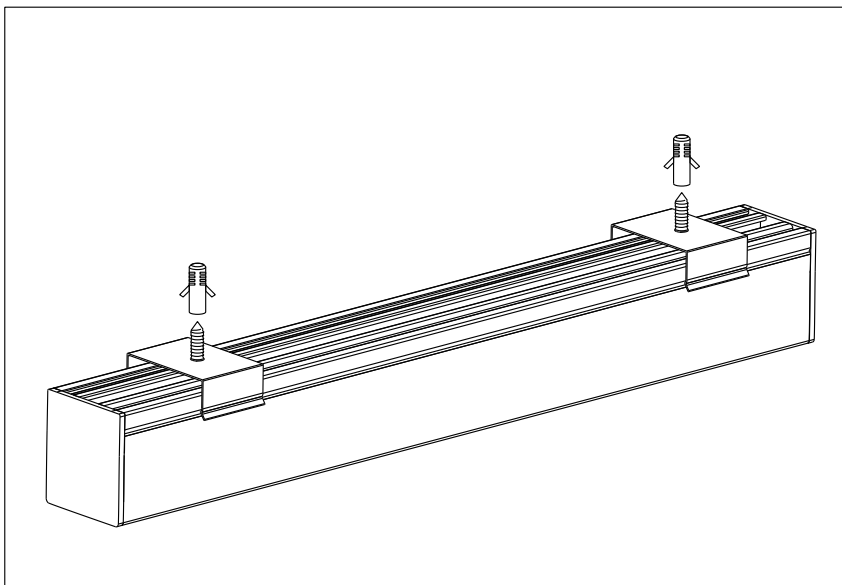


WARNING

1. Only for indoor lighting, no outdoor lighting or using under the condition of vibration, dust or high humidity. Or it will easily cause fire, electric shock or breakdown.
2. Power must be off before installation, cleaning, mending or replacement in case of electric shock or breakdown.
3. Please do not refit, add or change the accessories privately in case of shortening the lifespan or causing safety problems.
4. Distance between the lights and objects by illumination should be no less than 700mm.
5. Under no circumstances can the lights be covered by cloth or other similar objects in case of fire or breakdown.
6. Once lights do not work properly, please turn off the power wire and get in contact with our agent or ask a professional electrician to do the repairing in case of fire, falling or injury.



Packing Specification

Type	Length	Net Weight	QTY	Gross Weight	Demension
L1530WA/B/C/D	0.6m	0.46 kg	30PCS	15.5 kg	655x265x240 mm
	1.2m	0.92 kg	20PCS	19.1 kg	1250x265x185 mm

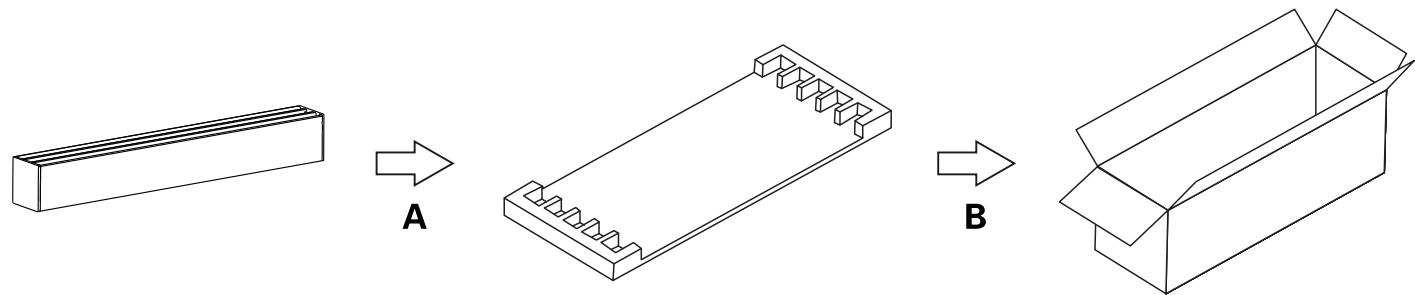

A: step to inside linear to EPE package.

B: step to put linears with EPE inside carton.