





LED SPOTLIGHT

LED KING PROVIDES SIMPLE ECO-LIGHTING FOR SMALL LIGHT.

A Series of outdoor LED Spotlights with Simple and Stable design.





SP-3W/12-24V

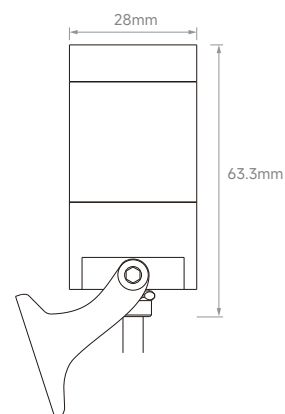

Part No of LED King	12V		24V		Lumen (Lm)	Colour	CRI	IP Rang	Beam Angle
	Power	Current	Power	Current					
SP-3W1224WW	3W	0.25A	3W	0.125A	190	3000K	>92	IP67	15° 30° 45° 60°
SP-3W1224CW						6000K			
SP-3W1224NW						4000K			



SPR-3W/12-24V

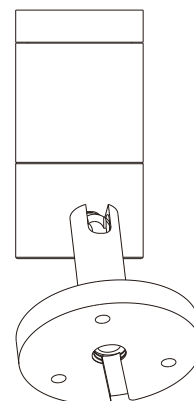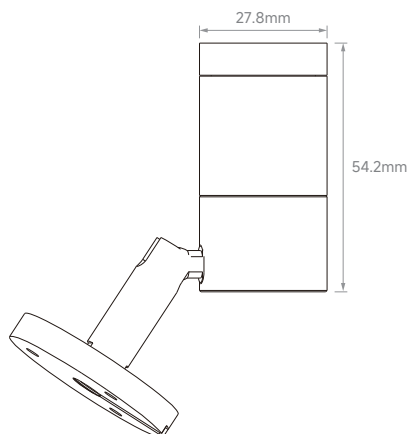

Part No of LED King	12V		24V		Lumen (Lm)	Colour	CRI	IP Rang	Beam Angle
	Power	Current	Power	Current					
SPR-3W1224WW	3W	0.25A	3W	0.125A	190	3000K	>92	IP20	15° 30° 45° 60°
SPR-3W1224CW						6000K			
SPR-3W1224NW						4000K			





SP-3X1W/12-24V

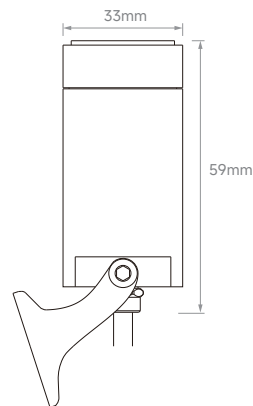

Part No of LED King	12V		24V		Lumen (Lm)	Colour	CRI	IP Rang	Beam Angle
	Power	Current	Power	Current					
SP-3X1W1224WW	3W	0.26A	3W	0.13A	230	3000K	>92	IP67	15° 30° 45° 60°
SP-3X1W1224CW						6000K			
SP-3X1W1224NW						4000K			



SP-3W/AC230V

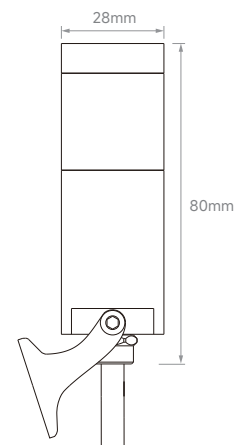

Part No of LED King	Power	Voltage	Lumen (Lm)	Colour	CRI	IP Rang	Beam Angle
SP-3W230WW	3W	AC 230V	190	3000K	>92	IP67	15° 30° 45° 60°
SP-3W230CW				6000K			
SP-3W230NW				4000K			





SP-3X1W/AC230V

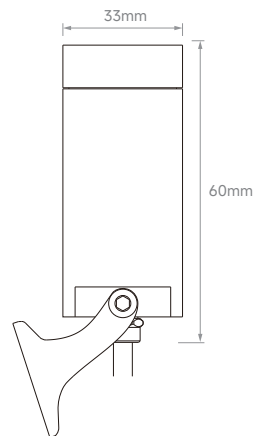

Part No of LED King	Power	Voltage	Lumen (Lm)	Colour	CRI	IP Rang	Beam Angle
SP-3X1W230WW	3W	AC 230V	230	3000K	>92	IP67	15°
SP-3X1W230CW				6000K			30°
SP-3X1W230NW				4000K			45° 60°



SP-6W/AC230V

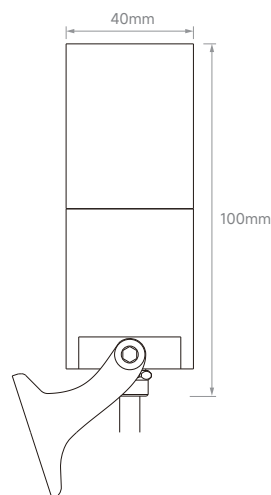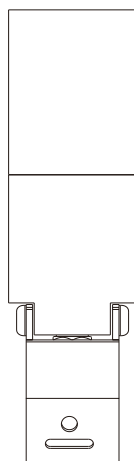

Part No of LED King	Power	Voltage	Lumen (Lm)	Colour	CRI	IP Rang	Beam Angle
SP-6W230WW	6W	AC 230V	580	3000K	>92	IP67	18°
SP-6W230CW				6000K			24°
SP-6W230NW				4000K			36° 45°





SP-12W/AC230V

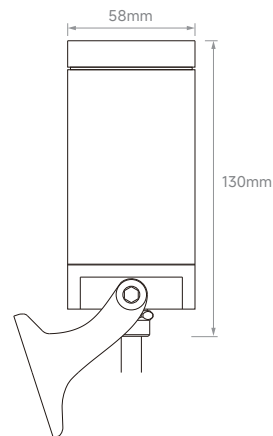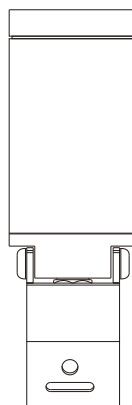

Part No of LED King	Power	Voltage	Lumen (Lm)	Colour	CRI	IP Rang	Beam Angle
SP-12W230WW	12W	AC 230V	1010	3000K	>92	IP67	18°
SP-12W230CW				6000K			24°
SP-12W230NW				4000K			36° 45°



SP-18W/AC230V

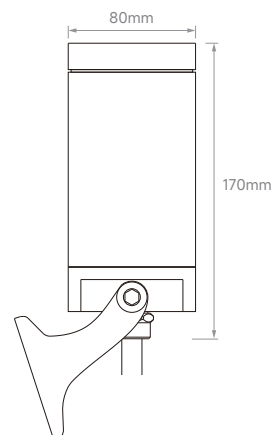

Part No of LED King	Power	Voltage	Lumen (Lm)	Colour	CRI	IP Rang	Beam Angle
SP-18W230WW	18W	AC 230V	1650	3000K	>92	IP67	18°
SP-18W230CW				6000K			24°
SP-18W230NW				4000K			36° 45°





SPS-12W/AC230V

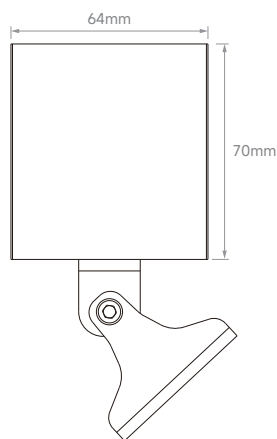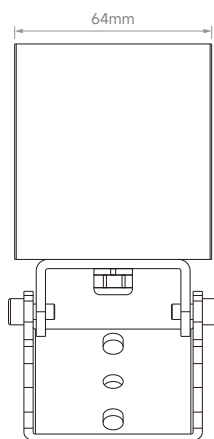

Part No of LED King	Power	Voltage	Lumen (Lm)	Colour	CRI	IP Rang	Beam Angle
SPS-12W230WW	12W	AC 230V	900	3000K	>92	IP67	18°
SPS-12W230CW			1010	6000K			24°
SPS-12W230NW				4000K			36° 45°

SPS-18W/AC230V

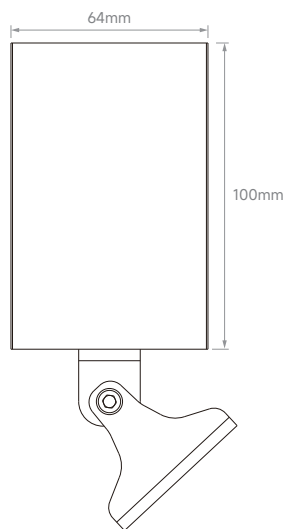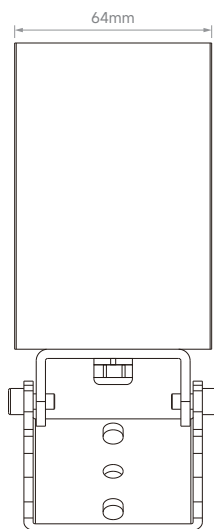


Part No of LED King	Power	Voltage	Lumen (Lm)	Colour	CRI	IP Rang	Beam Angle
SPS-18W230WW	18W	AC 230V	1470	3000K	>92	IP67	18°
SPS-18W230CW			1650	6000K			24°
SPS-18W230NW				4000K			36° 45°



Packing Specification

Type	Net Weight	QTY	Gross Weight	Demension
SP-3X1W1224	0.12kg	100PCS	14.4kg	420x320x250mm
SP-3W1224	0.10kg	100PCS	12.3kg	
SP-3X1W230	0.14kg	100PCS	16.2kg	
SP-3W230	0.12kg	100PCS	14.4kg	525x425x225mm
SPR-3W1224	0.28kg	60PCS	18.8kg	515x310x260mm
SP-6W230	0.28kg	60PCS	18.8kg	375x280x345mm
SP-12W230	0.60kg	30PCS	20.3kg	375x280x345mm
SP-18W230	1.10kg	20PCS	21.3kg	435x215x475mm
SPS-12W230	0.60kg	30PCS	20.3kg	375x280x345mm
SPS-18W230	1.10kg	20PCS	21.3kg	435x215x475mm

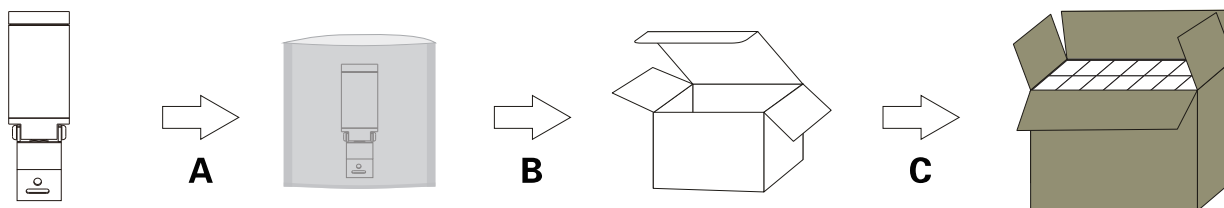

A: 1 pcs LED Spotlight Inside a pe bag.

B: After 1 PE bag with LED Spotlight into a box.

C: Put the box on outer container.