





Featuring a breakthrough design, this mini downlight combines a compact form with refined details. Its clean lines and premium finish deliver a modern, sophisticated look. Ideal for both accent and ambient lighting in residential or commercial spaces, it offers smooth, even illumination and easy installation. Crafted with precision for timeless performance.







MDL10W series




Part No of LED King	Colour	Beam Angle	Power	Input Current	Lumen (Lm)	CRI	IP Rang	Worok Life
MDL10W-WW	2700K 3000K 4000K 6000K	15°	10W	220mA	800	≥90	IP65	30000h
MDL10W-NW		24° 36°			850			
MDL10W-CW		55°			850			



Lighting Installation
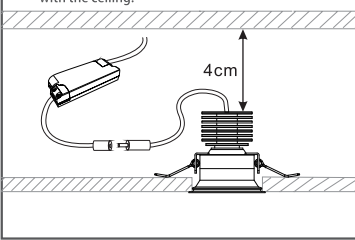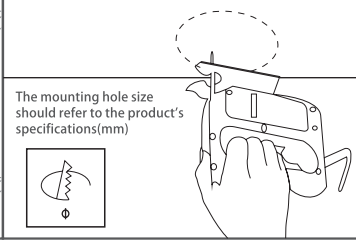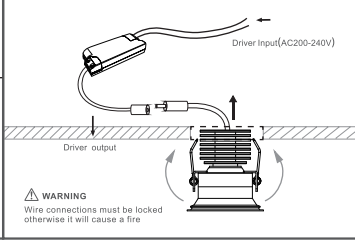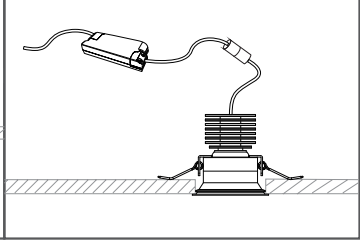
<p>1 Warning: Keep at least 4cm distances between the light with the ceiling.</p> 	<p>2 Measure the position for installation,make a hole in accordance with the cut-out size of the light.</p> <p>The mounting hole size should refer to the product's specifications(mm)</p> 	<p>3 Pull the spring clip upward in accordancewith the picture, fixed to the mounting holeon the ceiling.</p>  <p>WARNING Wire connections must be locked otherwise it will cause a fire</p>	<p>4 Put through the power,if light on,then the installation be finished.</p> 
--	--	--	--

 <p>WARNING</p>	<ol style="list-style-type: none">1.LED is low voltage product,please try to avoid direct contact with the metal part of input wires on the lamp.2.Input/Output wire for lamp and driver:Red wire for the anode,black wire for the cathode.3.Please connect the light with electrical accessory first,then open the power.4.If you do not buy our suitable electrical accessories,please buy the product which the constant current is fully consistent with our light's parameters.
--	---