

DZ47-63[C45N] Miniature Circuit Breaker



DZ47-63 1P



DZ47-63 2P



DZ47-63 3P



DZ47-63 4P


Application

DZ47-63(C45N) miniature circuit breaker is especially Suitable for illumination and distribution in industry and commerce. It is of pleasing out look, light in weight, reliable performance, high breaking capacity, high inflammable resistance and shock resistance for long service life. It is mainly used for overload and short circuit protection within the circuit of AC 50/60Hz, rated voltage of single pole up to 230V, two, three or four pole up to 400V. It can also be used for an unfrequent switchover of circuit and illumination under normal condition. It is CB approved.

Technical Specification

Poles	1P, 2P, 3P, 4P
Rated voltage(Un)	230V/400V
Rated current(In)	2, 4, 6, 10, 16, 20, 25, 32, 40, 50, 63A
Characteristic curve	IEC60898 B C D
Rated capacity of short-circuit breaking(Icn)	3kA
Terminal protection	IP20

Tripping Curve

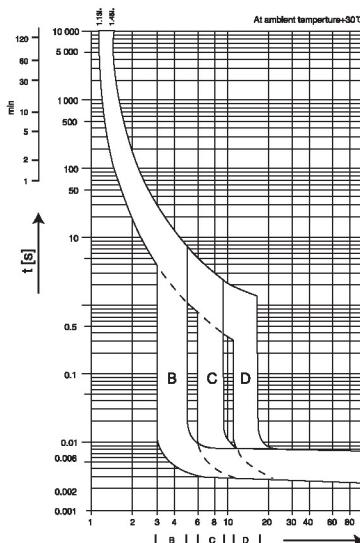

Configuration and Mounting Dimensions

