



## WGB017L Residual Circuit Breaker with Overload Protection


### Application

WGB017L residual circuit breaker with overload protection is used in the circuit of 50/60Hz, the voltage of 230V. It has the function of protection for overload and electrical leakage.

### Technical Specification

Poles	1P+N
Rated voltage(Un)	230V
Rated current(In)	6, 10, 15, 25, 32, 40A
Leakage motion current( $I \triangle n$ )	30mA
Leakage dead current( $I \triangle no$ )	15mA
Leakage motion time	$\leq 0.1S$
Rated short circuit breaking capacity(Icn)	6KA
Terminal protection	IP20

### Configuration and Mounting Dimensions

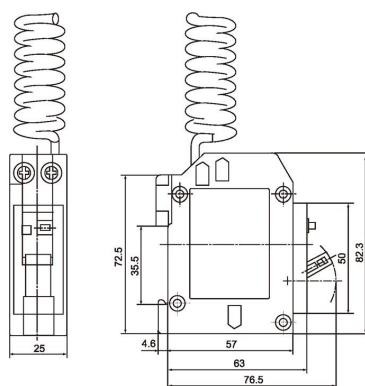

WGB017L



WGB017L