



主要技术参数 Basic technical data

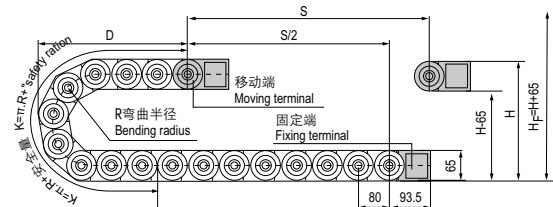



节距=91mm, 每米节数=11, ; 链长=S/2+K, S=行程距离, K=π.R+"安全量"+1 节距
Pitch=91mm, link per meter=11, length of chain=S/2+K, S=stroke, K=π.R+"safety ration"+1 Pitch

R	75	100	125	150	200	250	300
H	215	265	315	365	465	565	665
D	188	213	238	263	313	363	413
K	400	480	560	640	800	960	1120

示意图 Drawing

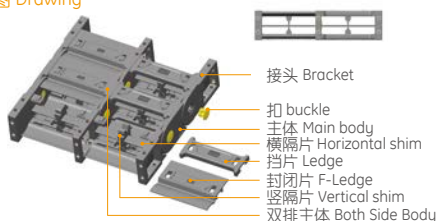

尺寸图 Dimension drawing

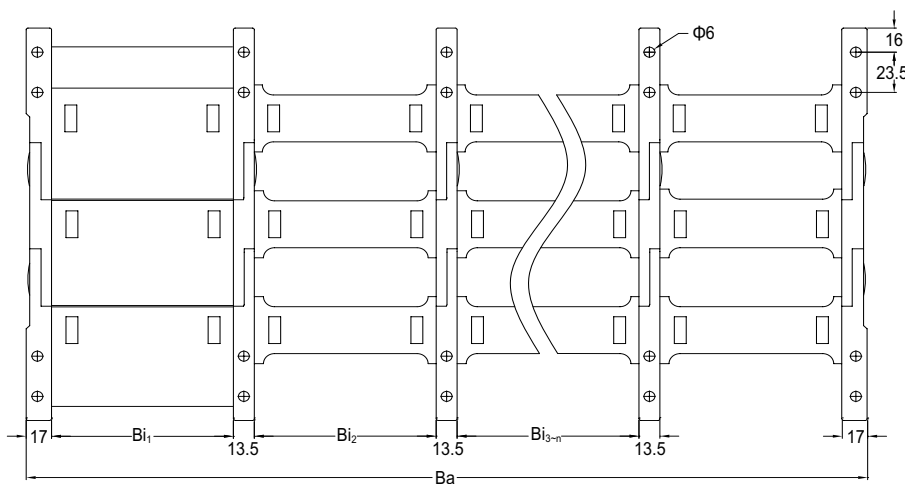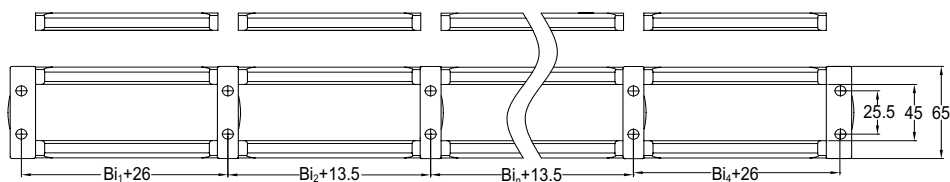

系列号 Series No.	内高 Hi	内宽 Bi		外高 Ha	外宽 Ba	弯曲半径 Bending radius R
		挡片 Ledge	封闭片 F-Ledge			
HT45Q(F).1.S	45	50 60 75 90 100 117 125 130 150 154 175 200 250 300	60 75 90 100 125 130 150 175 200	65	Ba = 34+ (Bi 1+Bi 2+Bi 3+...+Bi n) + (n-1)*13.5	75 100 125 150 200 250 300

注：桥式拖链与封闭式拖链可混合安装分隔片参照附录一