




HT80Q/F.1.S 系列 - 两侧可打开

Series of HT80Q/F.1.S-open of both side

JFLO®

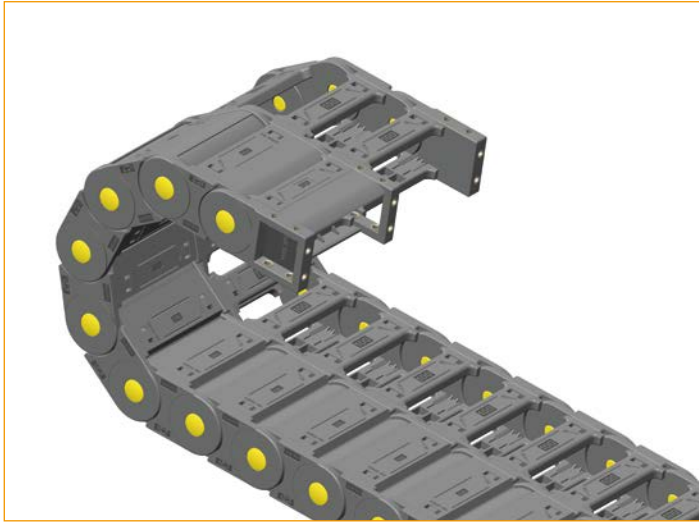


主要技术参数 Basic technical data

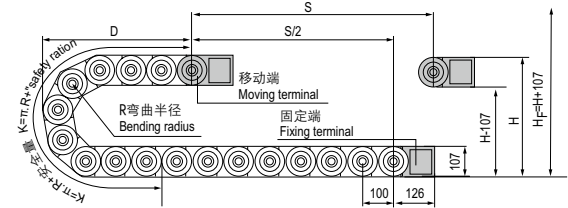



节距=91mm, 每米节数=11, ; 链长=S/2+K, S=行程距离, K=π.R+"安全量"+1 节距
Pitch=91mm, link per meter=11, length of chain=S/2+K, S=stroke, K=π.R+"safety ration"+1 Pitch

R	150	200	250	300	400	450	550	600
H	407	507	607	707	907	1007	1207	1307
D	304	354	404	454	554	604	704	754
K	700	900	1000	1200	1500	1700	2000	2100

示意图 Drawing

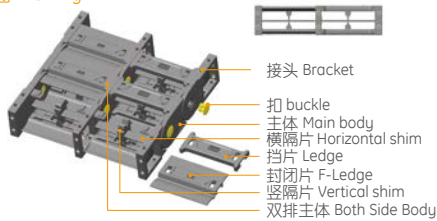

尺寸图 Dimension drawing

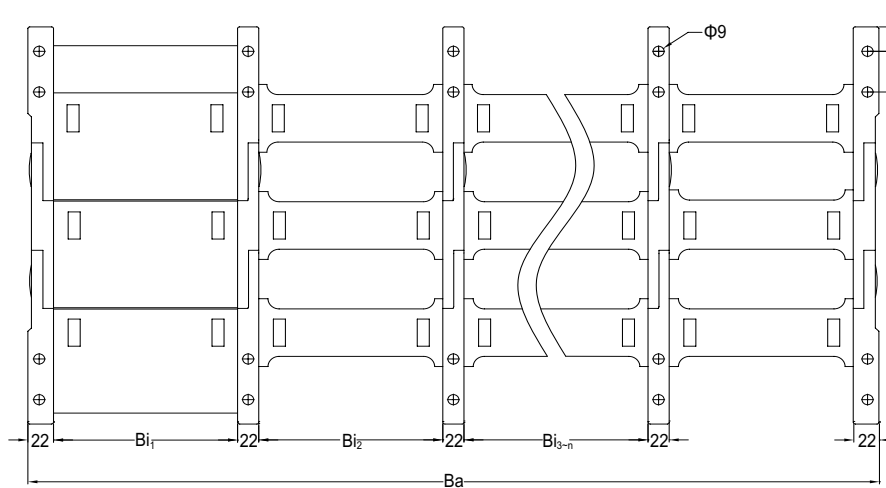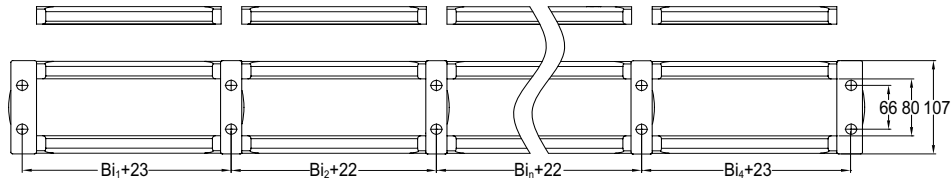

系列号 Series No.	内高 Hi	内宽 Bi		外高 Ha	外宽 Ba	弯曲半径 Bending radius R
		挡片 Ledge	封闭片 F-Ledge			
HT80Q(F).1.S	80	75 100 125 150 175 200 250 300 350	150 200 250 300 350	107	Ba = 44+ (Bi 1+Bi 2+Bi 3+...+Bi n) + (n-1) *22	150 200 250 300 400 450 550 600

注：桥式拖链与封闭式拖链可混合安装分隔片参照附录一