


J18Q.1.W 系列 - 桥式外侧开


Series of J18Q.1.W-Bridge type exterior opening

JFLO®

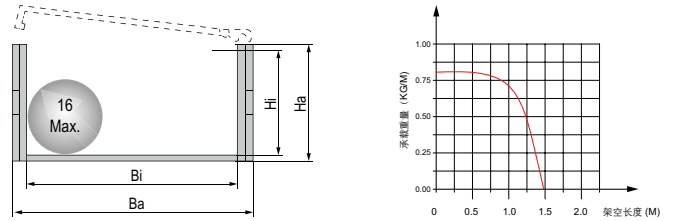

◎ 适用于直径 16 毫米以下线缆 Suitable for 16mm or less of cable.

主要技术参数 Basic technical data

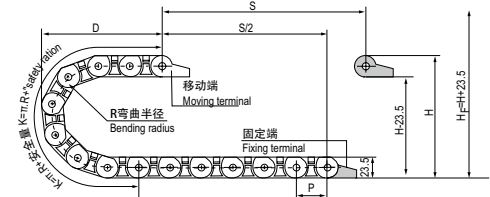

J18Q.1.25W:

节距 $P=33.5\text{mm}$, 每米节数 $=30$, 链长 $=S/2+K$, $S=$ 行程距离, $K=\pi \cdot R+$ "安全量"
Pitch $=33.5\text{mm}$, link per meter $=30$, length of chain $=S/2+K$, $S=$ stroke, $K=\pi \cdot R+$ "safety ration"

J18Q.1.37W, J18Q.1.50W:


节距 $P=30.5\text{mm}$, 每米节数 $=33$, 链长 $=S/2+K$, $S=$ 行程距离, $K=\pi \cdot R+$ "安全量"
Pitch $=30.5\text{mm}$, link per meter $=33$, length of chain $=S/2+K$, $S=$ stroke, $K=\pi \cdot R+$ "safety ration"

R	28	38	48	60	75
H	80	100	120	144	174
D	71	84	94	106	121
K	152	201	235	268	335

安装实际高度: $H_f=H+23.5\text{mm}$ (负载 0.75kg/m)

Actual mounting height: $H_f=H+23.5\text{mm}$ (load 0.75kg/m)

示意图 Drawing



主体 Main body

挡片 Ledge

接头 Bracket



JN18Q.2-SGP
竖隔片
Vertical Shim



J15.1.40-SZB
梳状板
Pectinate plate




J15.1.50-SZB
梳状板
Pectinate plate

拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters									
							可配接头类型 Applicable bracket type		孔径 Bore diameter Φ1	孔距 (mm)hole distance						接头代号 Bracket No.
										A	B	C	D	E	F	
J18Q.1.25W	18	25	23.5	35	Q.W	38,48,75	X ₄		5.2*7L	10	16	33		7	35	J18BF.1.25N-XJT
J18Q.1.37W	18	37	23.5	49	Q.W	28,38 48,75	X ₄		5.2*7.2L	10	25	33		7.5	49	J18Q.1.37W-XJT
J18Q.1.50W	18	50	23.5	62	Q.W		X ₄		5.2*6.2L	10	35	33		7.5	62	J18Q.1.50W-XJT


注: W 表示外侧开 Note: W Bridge type exterior opening

单位 (unit): mm

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)



X_4 型接头 X_4 type bracket



斜接头安装方式 Connector mounting way

* 可选: 带梳状板接头 例: J18BF.1.25N- XJTS

* Optional: Bracket with Pectinate plate Example: J18BF.1.25N- XJTS



* 可选导向槽配套 Optional: Guide supporting solution 详见 See P092

订货示例 Order Example

示例 拖链内高 18mm、内宽 25mm、半径 38mm、长度 1 米 /30 节 (Sample: inner height 18mm, inner width 25mm, radius 38mm, length 30 links/1 meter)

拖链 chain J18Q.1.25W R38 1000mm /30 Links

接头 Bracket J18Q.1.25W-XJT 1 副 (Set)

配件 Accessories

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.