


J25Q.1.S 系列 - 桥式两侧可打开


Series of J25Q.1.S-Bridge type open of both side

JFLO®

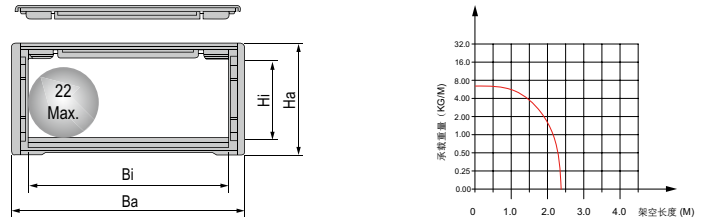

◎ 适用于直径 22 毫米以下线缆 Suitable for 22mm or less of cable.

主要技术参数 Basic technical data

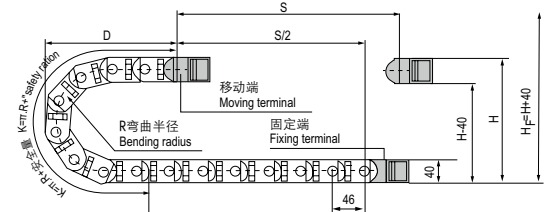


节距=46mm, 每米节数=22, 链长=S/2+K, S=行程距离, K=π.R+安全量
Pitch=46mm, link per meter=22, length of chain=S/2+K, S=stroke, K=π.R+safety ration

R	55	63	75	100	125	150	200	225
H	150	166	190	240	290	340	440	490
D	121	129	141	166	191	216	266	291
K	276	322	368	414	506	598	736	828

安装实际高度: $H_f = H + 40\text{mm}$ (负载 4kg/m)

Actual mounting height: $H_f = H + 40\text{mm}$ (load 4kg/m)

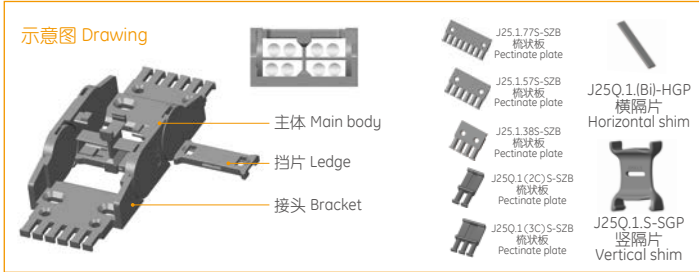


拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters									
							可配接头类型 Applicable bracket type	孔径 Bore diameter Φ1	孔距 (mm)hole distance						接头代号 Bracket No.	
									A	B	C	D	E	F		
J25Q.1.25S	25	25	40	42	Q.S	55,63,75,100, 125, 150,200 225	F-Q	6	13	50	47	15	13	59	J25Q.1.25S-FJT	
J25Q.1.38S	25	38	40	55	Q.S		X ₂	6.2*12L			25	43		10	54	J25Q.1.38S-XJT
J25Q.1.50S	25	50	40	67	Q.S		F-Q	6	13	63	47	15	13	72	J25Q.1.38S-FJT	
J25Q.1.57S	25	57	40	74	Q.S		F-Q	6	13	75	47	15	13	84	J25Q.1.50S-FJT	
J25Q.1.60S	25	60	40	77	Q.S		X ₃	6.2*12L			44	43		10.2	73	J25Q.1.57S-XJT
J25Q.1.75S	25	75	40	92	Q.S		F-Q	6	13	82	47	15	13	91	J25Q.1.57S-FJT	
J25Q.1.77S	25	77	40	94	Q.S		F-Q	6	13	85	47	15	13	94	J25Q.1.60S-FJT	
J25Q.1.100S	25	100	40	117	Q.S		F-Q	6	13	100	47	15	13	109	J25Q.1.75S-FJT	
J25Q.1.103S	25	103	40	120	Q.S		X ₅	6.2*12L			64	43		10.5	93	J25Q.1.77S-XJT
J25Q.1.125S	25	125	40	142	Q.S		F-Q	6	13	102	47	15	13	111	J25Q.1.77S-FJT	
							F-Q	6	13	125	47	15	13	134	J25Q.1.100S-FJT	
							F-Q	6	13	128	47	15	13	137	J25Q.1.103S-FJT	
							F-Q	6	13	150	47	15	13	159	J25Q.1.125S-FJT	

注: S 表示两侧可打开 Note: S indicates that the both side open

单位 (unit): mm

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

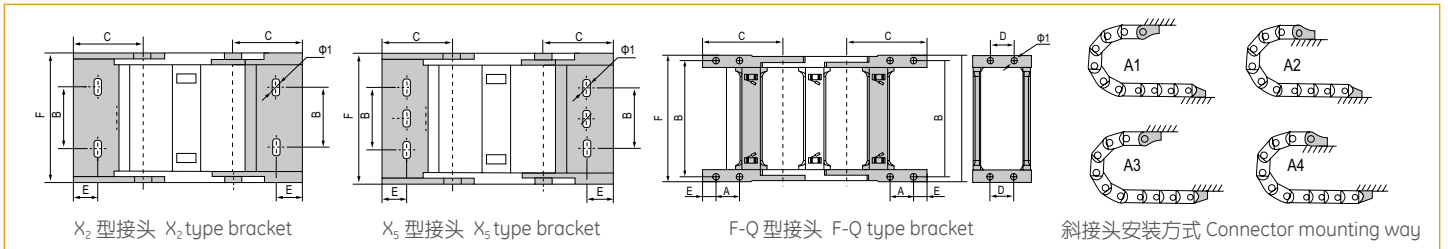

订货示例 Order Example

示例 拖链内高 25mm、内宽 25mm、半径 55mm、长度 1 米 /22 节 (Sample: inner height 25mm, inner width 25mm, radius 55mm, length 1 meter / 22 links)

拖链 chain J25Q.1.25S R55 1000mm / 22 Links

接头 Bracket J25Q.1.25S-FJT 1 副 (Set)

配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim / 1 horizontal shim can be mounted in every link)

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.

* 可选导向槽配套 Optional: Guide supporting solution 详见 See P092