



J25Q.2.S 系列 - 桥式两侧可打开


Series of J25Q.2.S-Bridge type open of both side

JFLO®



◎ 适用于直径 22 毫米以下线缆 Suitable for 22mm or less of cable.

主要技术参数 Basic technical data

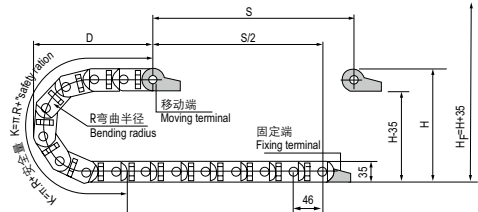


节距=46mm, 每米节数=22, 链长=S/2+K, S=行程距离, K=π.R+“安全量”
Pitch=46mm, link per meter=22, length of chain=S/2+K, S=stroke. K=π.R+“safety ration”

R	40	55	75	100	125	150	175	190	200	250
H	115	145	185	235	285	335	385	415	435	535
D	104	119	139	164	189	214	239	254	264	314
K	230	276	368	414	506	598	644	690	736	920

安装实际高度: $H_f = H + 35\text{mm}$ (负载 1.5kg/m)

Actual mounting height: $H_f = H + 35\text{mm}$ (load 1.5kg/m)

示意图 Drawing

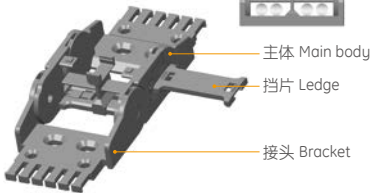


拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters								
							可配接头类型 Applicable bracket type	孔径 Bore diameter Φ1	孔距 (mm)hole distance						接头代号 Bracket No.
									A	B	C	D	E	F	
J25Q.2.25S	25	25	35	40	Q.S	40,55,75,100, 125,150,175, 190,200,250	X ₂	6.2*9L		14	41		12	40	J25Q.2.25S-XJT
							F-Q	6		50	33		10	60	J25Q.2.25S-FJT
J25Q.2.38S	25	38	35	53	Q.S		X ₂	6*10L		25	41		12	53	J25Q.2.38S-XJT
							F-Q	6		63	33		10	73	J25Q.2.38S-FJT
J25Q.2.50S	25	50	35	65	Q.S		X ₂	6*10L		37	41		12	65	J25Q.2.50S-XJT
							F-Q	6		75	33		10	85	J25Q.2.50S-FJT
J25Q.2.57S	25	57	35	72	Q.S		X ₂	6*10L		45	41		12	72	J25Q.2.57S-XJT
							F-Q	6		82	33		10	92	J25Q.2.57S-FJT
J25Q.2.77S	25	77	35	92	Q.S		X ₅	6*12L		57	41		12	92	J25Q.2.77S-XJT
							F-Q	6		102	33		10	112	J25Q.2.77S-FJT


注: S 表示两侧可打开 Note: S indicates that the both side open

单位 (unit): mm


固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

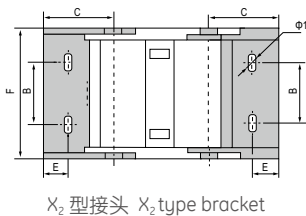


X₂ 型接头 X₂ type bracket



X₅ 型接头 X₅ type bracket

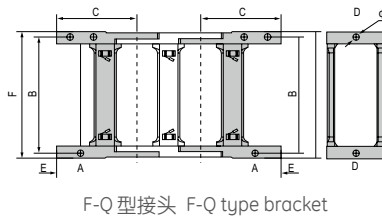

F-Q 型接头 F-Q type bracket

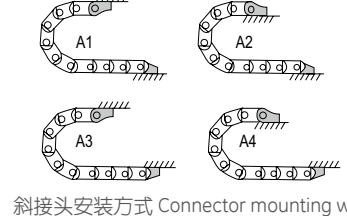

斜接头安装方式 Connector mounting way

订货示例 Order Example

示例 拖链内高 25mm、内宽 25mm、半径 55mm、长度 1 米 /22 节 (Sample: inner height 25mm, inner width 25mm, radius 55mm, length 1 meter /22 links)

拖链 chain J25Q.2.25S R55 1000mm /22 Links

接头 Bracket J25Q.2.25S-XJT 1 副 (Set)

配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.



* 可选导向槽配套 Optional: Guide supporting solution 详见 See P092