



J25Q.3.N 系列 - 桥式内侧可打开


Series of J25Q.3.N-Bridge type interior opening

JFLO®



◎ 适用于直径 22 毫米以下线缆 Suitable for 22mm or less of cable.

主要技术参数 Basic technical data

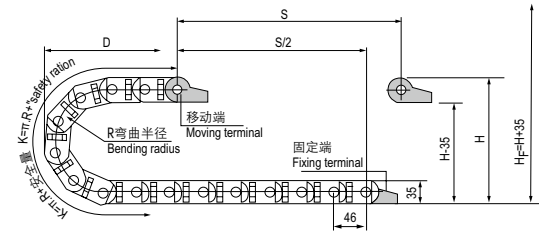


节距=46mm, 每米节数=22, 链长=S/2+K, S=行程距离, K=π.R+“安全量”
Pitch=46mm, link per meter=22, length of chain=S/2+K, S=stroke. K=π.R+“safety ration”

R	55	75	100	125	150	175	200
H	145	185	235	285	335	385	435
D	119	139	164	189	214	239	264
K	276	368	414	506	598	644	736

安装实际高度:H_f=H+35mm(负载 2kg/m)

Actual mounting height:H_f=H+35mm(load 2kg/m)

示意图 Drawing

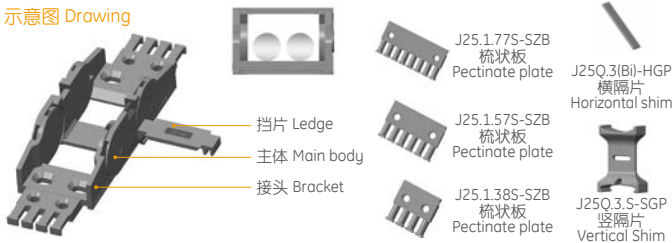


拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters									
							可配接头类型 Applicable bracket type		孔径 Bore diameter Φ1	孔距 (mm)hole distance					接头代号 Bracket No.	
										A	B	C	D	E		F
J25Q.3.38N	25	38	35	54	Q.N	55,75,100 125,150,175 200	X ₂		6*10L		25	41		12	54	J25Q.2.38N-XJT
J25Q.3.57N	25	57	35	73	Q.N		X ₂		6*10L		45	41		12	73	J25Q.2.57N-XJT
J25Q.3.77N	25	77	35	93	Q.N	55,75,100	X ₅		6*12L		57	41		12	93	J25Q.2.77N-XJT


注: N 表示内侧可打开 Note: N indicates that the interior opening

单位 (unit): mm


固定接头类型及参数 Fix bracket type and parameters (见表格 See table)



X₂ 型接头 X₂ type bracket



X₅ 型接头 X₅ type bracket



斜接头安装方式 Connector mounting way



* 可选导向槽配套 Optional: Guide supporting solution 详见 See P092

订货示例 Order Example

示例 拖链内高 25mm、内宽 38mm、半径 55mm、长度 1 米 /22 节 (Sample: inner height 25mm, inner width 38mm, radius 55mm, length 22 links/1 meter)

拖链 Chain J25Q.3.38N R55 1000mm /22 Links

接头 Bracket J25Q.2.38N -XJT 1 副 (Set)

配件 Accessories 每节装 1 个竖隔片 /1 个模隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.