


◎ 适用于直径 41 毫米以下线缆 Suitable for 41mm or less of cable.

主要技术参数 Basic technical data

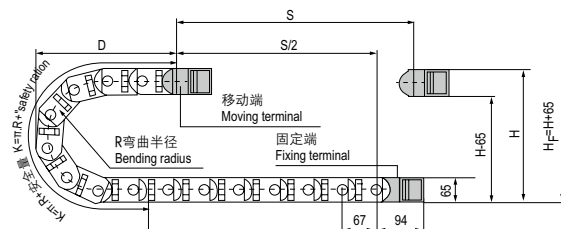


节距 = 67mm, 每米节数 = 15, 链长 = S/2 + K, S = 行程距离, K = $\pi \cdot R +$ "安全量"
Pitch = 67mm, link per meter = 15, length of chain = S/2 + K, S = stroke, K = $\pi \cdot R +$ "safety ration"

R	100	125	150	175	200	225	250	300
H	265	315	365	415	465	515	565	665
D	200	225	250	275	300	325	350	400
K	469	536	670	737	804	871	938	1139

安装实际高度: $H_f = H + 67\text{mm}$ (负载 10kg/m)

Actual mounting height: $H_f = H + 67\text{mm}$ (load 10kg/m)

示意图 Drawing

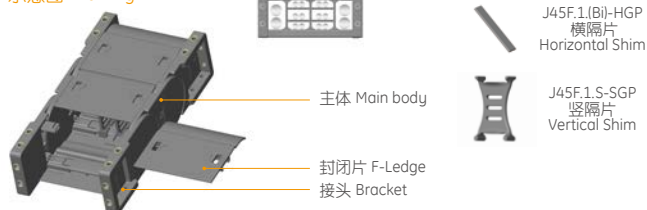


拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters									
							可配接头类型 Applicable bracket type	孔径 Bore diameter $\Phi 1$	孔距 (mm) hole distance						接头代号 Bracket No.	
J45F.1.50S	45	50	65	73	F.S	100,125,150, 175,200,225, 250,300	F-F	6	24	65	93.5	25.5	15.5	80	J45F.1.50S-FJT	
J45F.1.60S	45	60	65	83	F.S		F-F	6	24	75	93.5	25.5	15.5	90	J45F.1.60S-FJT	
J45F.1.75S	45	75	65	98	F.S		F-F	6	24	90	93.5	25.5	15.5	105	J45F.1.75S-FJT	
J45F.1.100S	45	100	65	123	F.S		F-F	6	24	115	93.5	25.5	15.5	130	J45F.1.100S-FJT	
J45F.1.125S	45	125	65	148	F.S		F-F	6	24	140	93.5	25.5	15.5	155	J45F.1.125S-FJT	
J45F.1.130S	45	130	65	153	F.S		F-F	6	24	145	93.5	25.5	15.5	160	J45F.1.130S-FJT	
J45F.1.150S	45	150	65	173	F.S		F-F	6	24	165	93.5	25.5	15.5	180	J45F.1.150S-FJT	
J45F.1.175S	45	175	65	198	F.S		F-F	6	24	190	93.5	25.5	15.5	205	J45F.1.175S-FJT	

注: S 表示两侧可打开 Note: S indicates that the both side open

单位 (unit): mm

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

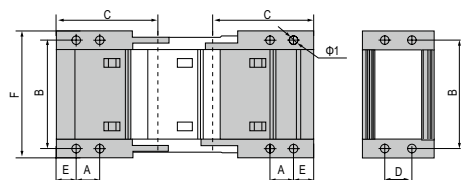

F-F 型接头 F-F type bracket

订货示例 Order Example

示例 拖链内高 45mm、内宽 75mm、半径 125mm、长度 1 米 / 15 节 (Sample: inner height 45mm, inner width 75mm, radius 125mm, length 15 links/1 meter)

拖链 Chain J45F.1.50S R125 1000mm / 15 Links

接头 Bracket J45F.1.50S -FJT 1 副 (Set)

配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.



* 可选导向槽配套 Optional: Guide supporting solution 详见 See P092