



J45Q.1.S 系列 - 桥式两侧可打开


Series of J45Q.1.S-Bridge type open of both side

JFLO®



◎ 适用于直径 41 毫米以下线缆 Suitable for 41mm or less of cable.

主要技术参数 Basic technical data

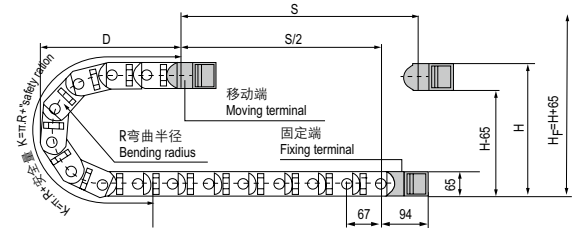


节距=67mm, 每米节数=15, 链长=S/2+K, S=行程距离, K=π.R+"安全量"
Pitch=67mm, link per meter=15, length of chain=S/2+K, S=stroke. K=π.R+"safety ration"

R	75	100	125	150	175	200	225	250	300
H	215	265	315	365	415	465	515	565	665
D	175	200	225	250	275	300	325	350	400
K	402	469	536	670	737	804	871	938	1139

安装实际高度 :H_f=H+65mm(负载 10kg/m)

Actual mounting height:H_f=H+65mm(load 10kg/m)


示意图 Drawing

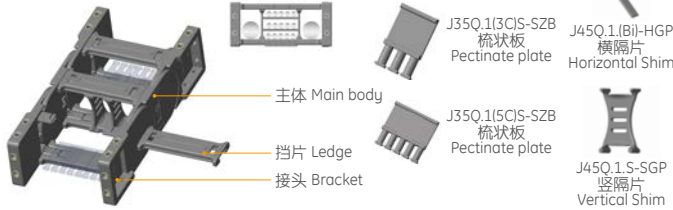

拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters									
							可配接头类型 Applicable bracket type	孔径 Bore diameter Φ1	孔距 (mm)hole distance						接头代号 Bracket No.	
									A	B	C	D	E	F		
J45Q.1.50S	45	50	65	73	Q.S	75,100,125 150,175,200 225,250,300	F-Q	6	24	65	93.5	25.5	15.5	80	J45Q.1.50S-FJT	
J45Q.1.60S	45	60	65	83	Q.S		F-Q	6	24	75	93.5	25.5	15.5	90	J45Q.1.60S-FJT	
J45Q.1.75S	45	75	65	98	Q.S		F-Q	6	24	90	93.5	25.5	15.5	105	J45Q.1.75S-FJT	
J45Q.1.90S	45	90	65	113	Q.S		F-Q	6	24	105	93.5	25.5	15.5	120	J45Q.1.90S-FJT	
J45Q.1.100S	45	100	65	123	Q.S		F-Q	6	24	115	93.5	25.5	15.5	130	J45Q.1.100S-FJT	
J45Q.1.117S	45	117	65	140	Q.S		F-Q	6	24	132	93.5	25.5	15.5	147	J45Q.1.117S-FJT	
J45Q.1.125S	45	125	65	148	Q.S		F-Q	6	24	140	93.5	25.5	15.5	155	J45Q.1.125S-FJT	
J45Q.1.130S	45	130	65	153	Q.S		F-Q	6	24	145	93.5	25.5	15.5	160	J45Q.1.130S-FJT	
J45Q.1.150S	45	150	65	173	Q.S		F-Q	6	24	165	93.5	25.5	15.5	180	J45Q.1.150S-FJT	
J45Q.1.154S	45	154	65	177	Q.S		F-Q	6	24	169	93.5	25.5	15.5	184	J45Q.1.154S-FJT	
J45Q.1.175S	45	175	65	198	Q.S		F-Q	6	24	190	93.5	25.5	15.5	205	J45Q.1.175S-FJT	
J45Q.1.200S	45	200	65	223	Q.S		F-Q	6	24	215	93.5	25.5	15.5	230	J45Q.1.200S-FJT	
J45Q.1.250S	45	250	65	273	Q.S		F-Q	6	24	265	93.5	25.5	15.5	280	J45Q.1.250S-FJT	
J45Q.1.300S	45	300	65	323	Q.S		F-Q	6	24	315	93.5	25.5	15.5	330	J45Q.1.300S-FJT	

注: S 表示两侧可打开 Note: S indicates that the both side open

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

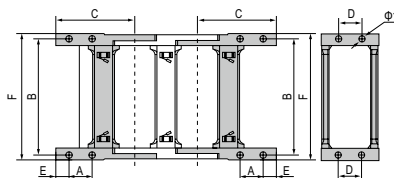

F-Q 型接头 F-Q type bracket

订货示例 Order Example

示例 拖链内高 45mm、内宽 50mm、半径 100mm、长度 1 米 /15 节 (Sample: inner height 45mm, inner width 50mm, radius 100mm, length 15 links/1 meter)

拖链 Chain J45Q.1.50S R100 1000mm /15 Links

接头 Bracket J45Q.1.50S-FJT 1 副 (Set)

配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.



* 可选导向槽配套 Optional: Guide supporting solution 详见 See P092