




JFLO®

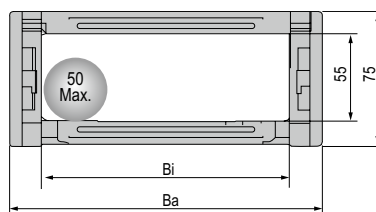


主要技术参数 Basic technical data

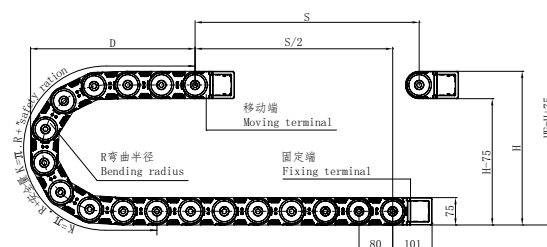

Pitch=80mm, link per meter=13, length of chain= $S/2+K$, S =stroke. $K=\pi.R$ +"safety ration"

R	75	100	125	150	200	250	300
H	225	275	325	375	475	575	675
D	193	218	243	268	318	368	418
K	400	480	560	640	800	960	1120

Actual mounting height: $H_F = H + 75\text{mm}$ (load 3kg/m)



- 主体 Main body
- 摩擦片 Separator

- 扣 buckle
- 挡片 Ledge
- 接头 Bracket

JEZ55Q.2.(Bi)-HGP
横隔片
Horizontal Shim

J55Q.1.S-SGP
竖隔片
Vertical Shim


JEZ55Q.2.S-MCP
摩擦片
Separator

拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters									
							可配接头类型 Applicable bracket type	孔径 Bore diameter Φ1	孔距 (mm)hole distance						接头代号 Bracket No.	
									A	B	C	D	E	F		
JEZ55Q.2.50S	55	50	75	79.6	Q.S	75.100.125. 150.200.250. 300		F-Q	6	30	68.5	101	30	17	84	JEZ55Q.2.50S-FJT
JEZ55Q.2.60S	55	60	75	89.6	Q.S			F-Q	6	30	78.5	101	30	17	94	JEZ55Q.2.60S-FJT
JEZ55Q.2.75S	55	75	75	104.6	Q.S			F-Q	6	30	93.5	101	30	17	109	JEZ55Q.2.75S-FJT
JEZ55Q.2.90S	55	90	75	119.6	Q.S			F-Q	6	30	108.5	101	30	17	124	JEZ55Q.2.90S-FJT
JEZ55Q.2.100S	55	100	75	129.6	Q.S			F-Q	6	30	118.5	101	30	17	134	JEZ55Q.2.100S-FJT
JEZ55Q.2.117S	55	117	75	146.6	Q.S			F-Q	6	30	135.5	101	30	17	151	JEZ55Q.2.117S-FJT
JEZ55Q.2.125S	55	125	75	154.6	Q.S			F-Q	6	30	143.5	101	30	17	159	JEZ55Q.2.125S-FJT
JEZ55Q.2.130S	55	130	75	159.6	Q.S			F-Q	6	30	148.5	101	30	17	166	JEZ55Q.2.130S-FJT
JEZ55Q.2.150S	55	150	75	179.6	Q.S			F-Q	6	30	168.5	101	30	17	184	JEZ55Q.2.150S-FJT
JEZ55Q.2.154S	55	154	75	183.6	Q.S			F-Q	6	30	172.5	101	30	17	188	JEZ55Q.2.154S-FJT
JEZ55Q.2.175S	55	175	75	204.6	Q.S			F-Q	6	30	193.5	101	30	17	209	JEZ55Q.2.175S-FJT
JEZ55Q.2.200S	55	200	75	229.6	Q.S			F-Q	6	30	218.5	101	30	17	234	JEZ55Q.2.200S-FJT
JEZ55Q.2.250S	55	250	75	279.6	Q.S			F-Q	6	30	268.5	101	30	17	284	JEZ55Q.2.250S-FJT
JEZ55Q.2.300S	55	300	75	329.6	Q.S			F-Q	6	30	318.5	101	30	17	334	JEZ55Q.2.300S-FJT


单位 (unit): mm

Note: O: S Bridge type open of both side, F-Q: bridge type square bracket, Different serial number indicates the difference rank type of fixing holes


固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

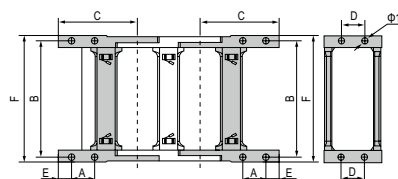

F-O 型接头 F-O type bracket



* 可选导向槽配套 Optional: Guide supporting solution



详见 P092
See P092

示例 拖链内高 55mm、内宽 50mm、半径 75mm、长度 1 米 /13 节 (Sample: inner height 55mm, inner width 50mm, radius 75mm, length 13 links/1 meter)

接头 Bracket	JEZ550.2.50S-FJT	1 副 (Set)
------------	------------------	-----------

配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)