


◎ 适用于直径 60 毫米以下线缆 Suitable for 60mm or less of cable.

### 主要技术参数 Basic technical data

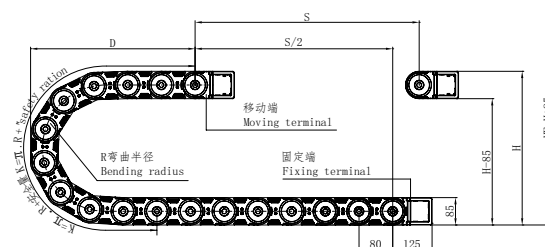

节距=80mm, 每米节数=13, 链长= $S/2+K$ ,  $S$ =行程距离,  $K=\pi \cdot R$ + "安全量"


Pitch=80mm, link per meter=22, length of chain= $S/2+K$ ,  $S$ =stroke.  $K=\pi \cdot R$ +"safety ration"

|   |     |     |     |     |      |      |      |
|---|-----|-----|-----|-----|------|------|------|
| R | 125 | 150 | 200 | 250 | 300  | 400  | 500  |
| H | 335 | 385 | 485 | 585 | 685  | 885  | 1085 |
| D | 248 | 273 | 323 | 373 | 423  | 523  | 623  |
| K | 560 | 640 | 800 | 960 | 1120 | 1440 | 1760 |

安装实际高度:  $H_F = H + 85\text{mm}$  (负载  $3\text{kg/m}$ )

Actual mounting height:  $H_F = H + 85\text{mm}$  (load 3kg/m)

### 示意图 Drawing

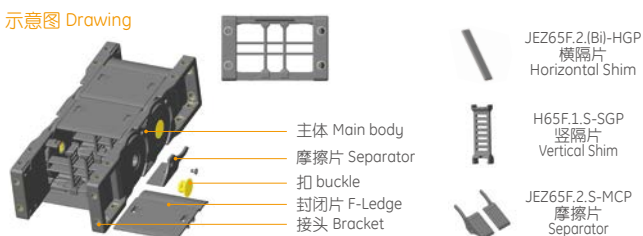


| 拖链型号<br>Cable Chain<br>No. | 内高<br>Hi | 内宽<br>Bi | 外高<br>Ha | 外宽<br>Ba | 款式<br>Styles | 弯曲半径<br>Bending<br>radius<br>R    | 固定接头类型及参数 Bracket type and parameters |                           |                      |    |     |     |    |    |                     |                   |
|----------------------------|----------|----------|----------|----------|--------------|-----------------------------------|---------------------------------------|---------------------------|----------------------|----|-----|-----|----|----|---------------------|-------------------|
|                            |          |          |          |          |              |                                   | 可配接头类型<br>Applicable<br>bracket type  | 孔径<br>Bore diameter<br>φ1 | 孔距 (mm)hole distance |    |     |     |    |    | 接头代号<br>Bracket No. |                   |
|                            |          |          |          |          |              |                                   |                                       |                           | A                    | B  | C   | D   | E  | F  |                     |                   |
| JEZ65F.2.50S               | 65       | 50       | 85       | 81.6     | F.S          | 125.150.200<br>250.300.400<br>500 |                                       | F-F                       | 9                    | 35 | 72  | 125 | 45 | 20 | 90                  | JEZ65F.2.50S-FJT  |
| JEZ65F.2.60S               | 65       | 60       | 85       | 91.6     | F.S          |                                   |                                       | F-F                       | 9                    | 35 | 82  | 125 | 45 | 20 | 100                 | JEZ65F.2.60S-FJT  |
| JEZ65F.2.75S               | 65       | 75       | 85       | 106.6    | F.S          |                                   |                                       | F-F                       | 9                    | 35 | 97  | 125 | 45 | 20 | 115                 | JEZ65F.2.75S-FJT  |
| JEZ65F.2.90S               | 65       | 90       | 85       | 121.6    | F.S          |                                   |                                       | F-F                       | 9                    | 35 | 112 | 125 | 45 | 20 | 130                 | JEZ65F.2.90S-FJT  |
| JEZ65F.2.100S              | 65       | 100      | 85       | 131.6    | F.S          |                                   |                                       | F-F                       | 9                    | 35 | 122 | 125 | 45 | 20 | 140                 | JEZ65F.2.100S-FJT |
| JEZ65F.2.125S              | 65       | 125      | 85       | 156.6    | F.S          |                                   |                                       | F-F                       | 9                    | 35 | 147 | 125 | 45 | 20 | 165                 | JEZ65F.2.125S-FJT |
| JEZ65F.2.130S              | 65       | 130      | 85       | 161.6    | F.S          |                                   |                                       | F-F                       | 9                    | 35 | 152 | 125 | 45 | 20 | 170                 | JEZ65F.2.130S-FJT |
| JEZ65F.2.150S              | 65       | 150      | 85       | 181.6    | F.S          |                                   |                                       | F-F                       | 9                    | 35 | 172 | 125 | 45 | 20 | 190                 | JEZ65F.2.150S-FJT |
| JEZ65F.2.175S              | 65       | 175      | 85       | 206.6    | F.S          |                                   |                                       | F-F                       | 9                    | 35 | 197 | 125 | 45 | 20 | 215                 | JEZ65F.2.175S-FJT |
| JEZ65F.2.200S              | 65       | 200      | 85       | 231.6    | F.S          |                                   |                                       | F-F                       | 9                    | 35 | 222 | 125 | 45 | 20 | 240                 | JEZ65F.2.200S-FJT |

注：F.S 表示全封闭式双侧打开，F-F 表示：封闭方型接头，不同序号表示安装孔的不同排列样式


Note:F.S Enclosed open of both side,F-F: enclosed type bracket,Different serial number indicates the difference rank type of fixing holes

单位 (unit): mm


固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

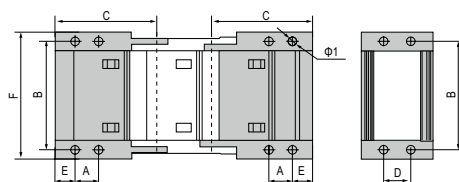

F-F 型接头 F-F type bracket



\* 可选导向槽配套 Optional: Guide supporting solution



详见 P092  
See P092

### 订货示例 Order Example

示例 拖链内高 65mm、内宽 50mm、半径 125mm、长度 1 米/13 节 (Sample: inner height 65mm, inner width 50mm, radius 125mm, length 13 links/1 meter)

|          |              |      |                                                     |
|----------|--------------|------|-----------------------------------------------------|
| 拖链 Chain | JEZ65F.2.50S | R125 | 1000mm /13 Links (实际长度 Physical length: $\pm 2$ mm) |
|----------|--------------|------|-----------------------------------------------------|

|            |                  |           |
|------------|------------------|-----------|
| 接头 Bracket | JEZ65F.2.50S-FJT | 1 副 (Set) |
|------------|------------------|-----------|

配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)