



JEZ65Q.2.S 系列 - 桥式双侧打开


Series of JEZ65Q.2.S-Bridge type open of both side

JFLO®

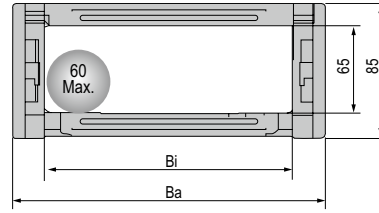

◎ 适用于直径 60 毫米以下线缆 Suitable for 60mm or less of cable.

主要技术参数 Basic technical data

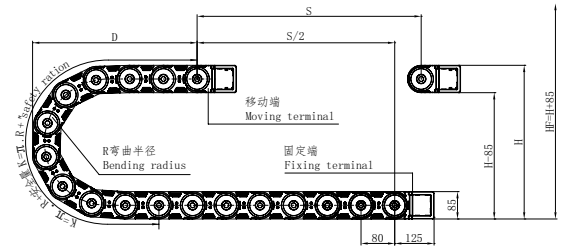

节距=80mm, 每米节数=13, 链长=S/2+K, S=行程距离, K=π.R+“安全量”


Pitch=80mm, link per meter=13, length of chain=S/2+K, S=stroke. K=π.R+“safety ration”

R	125	150	200	250	300	400	500
H	335	385	485	585	685	885	1085
D	248	273	323	373	423	523	623
K	560	640	800	960	1120	1440	1760

安装实际高度: H_F=H+85mm(负载 3kg/m)

Actual mounting height: H_F=H+85mm(load 3kg/m)

示意图 Drawing

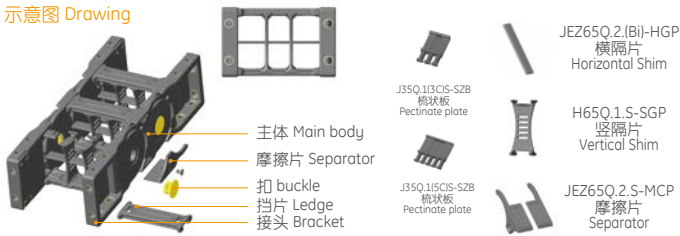


拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters								
							可配接头类型 Applicable bracket type	孔径 Bore diameter Φ1	孔距 (mm)hole distance						接头代号 Bracket No.
									A	B	C	D	E	F	
JEZ65Q.2.50S	65	50	85	81.6	Q.S	125. 150. 200 250. 300. 400 500	F-Q	9	35	72	125	45	20	90	JEZ65Q.2.50S-FJT
JEZ65Q.2.60S	65	60	85	91.6	Q.S		F-Q	9	35	82	125	45	20	100	JEZ65Q.2.60S-FJT
JEZ65Q.2.75S	65	75	85	106.6	Q.S		F-Q	9	35	97	125	45	20	115	JEZ65Q.2.75S-FJT
JEZ65Q.2.90S	65	90	85	121.6	Q.S		F-Q	9	35	112	125	45	20	130	JEZ65Q.2.90S-FJT
JEZ65Q.2.100S	65	100	85	131.6	Q.S		F-Q	9	35	122	125	45	20	140	JEZ65Q.2.100S-FJT
JEZ65Q.2.117S	65	117	85	148.6	Q.S		F-Q	9	35	139	125	45	20	157	JEZ65Q.2.117S-FJT
JEZ65Q.2.125S	65	125	85	156.6	Q.S		F-Q	9	35	147	125	45	20	165	JEZ65Q.2.125S-FJT
JEZ65Q.2.130S	65	130	85	161.6	Q.S		F-Q	9	35	152	125	45	20	170	JEZ65Q.2.130S-FJT
JEZ65Q.2.150S	65	150	85	181.6	Q.S		F-Q	9	35	172	125	45	20	190	JEZ65Q.2.150S-FJT
JEZ65Q.2.154S	65	154	85	185.6	Q.S		F-Q	9	35	176	125	45	20	194	JEZ65Q.2.154S-FJT
JEZ65Q.2.175S	65	175	85	206.6	Q.S		F-Q	9	35	197	125	45	20	215	JEZ65Q.2.175S-FJT
JEZ65Q.2.200S	65	200	85	231.6	Q.S		F-Q	9	35	222	125	45	20	240	JEZ65Q.2.200S-FJT
JEZ65Q.2.250S	65	250	85	281.6	Q.S		F-Q	9	35	272	125	45	20	290	JEZ65Q.2.250S-FJT
JEZ65Q.2.300S	65	300	85	331.6	Q.S		F-Q	9	35	322	125	45	20	340	JEZ65Q.2.300S-FJT

注: Q.S 表示桥式两侧可打开, F-Q 表示: 桥式方型接头, 不同序号表示安装孔的不同排列样式


Note: Q.S Bridge type open of both side, F-Q: bridge type square bracket, Different serial number indicates the difference rank type of fixing holes

单位 (unit): mm


固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

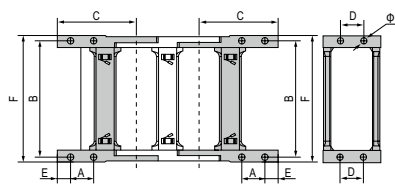

F-Q 型接头 F-Q type bracket



* 可选导向槽配套 Optional: Guide supporting solution



详见 P092
See P092

订货示例 Order Example

示例 拖链内高 65mm、内宽 50mm、半径 125mm、长度 1 米 /13 节 (Sample: inner height 65mm, inner width 50mm, radius 125mm, length 13 links/1 meter)

拖链 Chain JEZ65Q.2.50S R125 1000mm /13 Links (实际长度 Physical length: ± 2mm)

接头 Bracket JEZ65Q.2.50S-FJT 1 副 (Set)

配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)