



JEZ80Q.2.S 系列 - 桥式双侧打开


Series of JEZ80Q.2.S-Bridge type open of both side

JFLO®

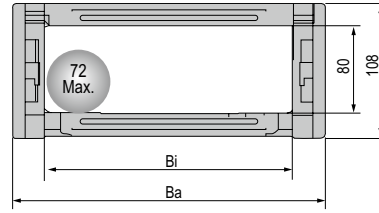

◎ 适用于直径 72 毫米以下线缆 Suitable for 72mm or less of cable.

主要技术参数 Basic technical data

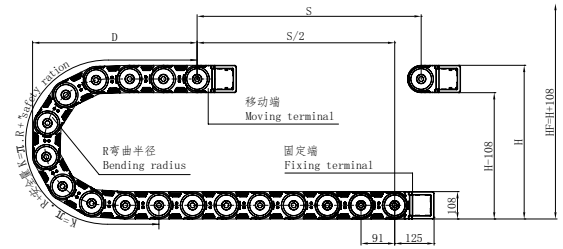


节距=91mm, 每米节数=11, 链长=S/2+K, S=行程距离, K=π.R+“安全量”
Pitch=91mm, link per meter=11, length of chain=S/2+K, S=stroke. K=π.R+“safety ration”

R	150	200	250	300	350	400	500	600
H	408	508	608	708	808	908	1108	1308
D	295	345	395	445	495	545	645	745
K	728	819	1001	1183	1365	1456	1820	2093

安装实际高度:H_F=H+108mm(负载 3kg/m)

Actual mounting height:H_F=H+108mm(load 3kg/m)

示意图 Drawing

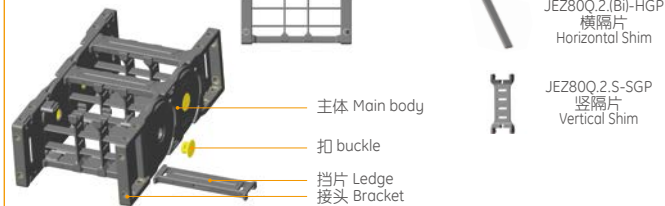


拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters									
							可配接头类型 Applicable bracket type	孔径 Bore diameter Φ1	孔距 (mm)hole distance						接头代号 Bracket No.	
									A	B	C	D	E	F		
JEZ80Q.2.75S	80	75	108	106	Q.S	150.200.250. 300.350.400. 500.600		F-Q	9	35	95	125	66	20	112	JEZ80Q.2.75S-FJT
JEZ80Q.2.85S	80	85	108	116	Q.S			F-Q	9	35	105	125	66	20	122	JEZ80Q.2.85S-FJT
JEZ80Q.2.100S	80	100	108	131	Q.S			F-Q	9	35	120	125	66	20	137	JEZ80Q.2.100S-FJT
JEZ80Q.2.125S	80	125	108	156	Q.S			F-Q	9	35	145	125	66	20	162	JEZ80Q.2.125S-FJT
JEZ80Q.2.150S	80	150	108	181	Q.S			F-Q	9	35	170	125	66	20	187	JEZ80Q.2.150S-FJT
JEZ80Q.2.175S	80	175	108	206	Q.S			F-Q	9	35	195	125	66	20	212	JEZ80Q.2.175S-FJT
JEZ80Q.2.200S	80	200	108	231	Q.S			F-Q	9	35	220	125	66	20	237	JEZ80Q.2.200S-FJT
JEZ80Q.2.250S	80	250	108	281	Q.S			F-Q	9	35	270	125	66	20	287	JEZ80Q.2.250S-FJT
JEZ80Q.2.300S	80	300	108	331	Q.S			F-Q	9	35	320	125	66	20	337	JEZ80Q.2.300S-FJT
JEZ80Q.2.350S	80	350	108	381	Q.S			F-Q	9	35	370	125	66	20	387	JEZ80Q.2.350S-FJT
JEZ80Q.2.400S	80	400	108	431	Q.S		F-Q	9	35	420	125	66	20	437	JEZ80Q.2.400S-FJT	

注: Q.S 表示桥式两侧可打开, F-Q 表示: 桥式方型接头, 不同序号表示安装孔的不同排列样式


Note: Q.S Bridge type open of both side, F-Q: bridge type square bracket, Different serial number indicates the difference rank type of fixing holes

单位 (unit): mm

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

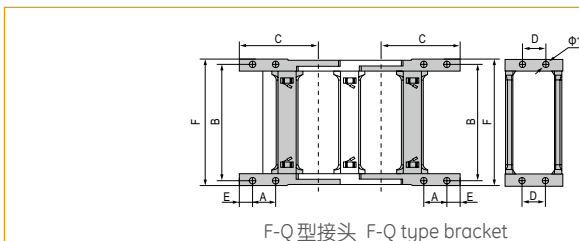

* 可选导向槽配套 Optional: Guide supporting solution



详见 P092
See P092

订货示例 Order Example

示例 拖链内高 80mm、内宽 75mm、半径 150mm、长度 1 米 /11 节 (Sample: inner height 80mm, inner width 75mm, radius 150mm, length 11 links/1 meter)

拖链 Chain JEZ80Q.2.75S R150 1000mm /11 Links (实际长度 Physical length: ± 2mm)

接头 Bracket JEZ80Q.2.75S-FJT 1 副 (Set)

配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)