



JN100Q.1.S 系列 - 桥式双侧开


Series of JN100Q.1.S-Bridge type both side opening

JFLO®



◎ 适用于直径 90 毫米以下线缆 Suitable for 90mm or less of cable.

主要技术参数 Basic technical data

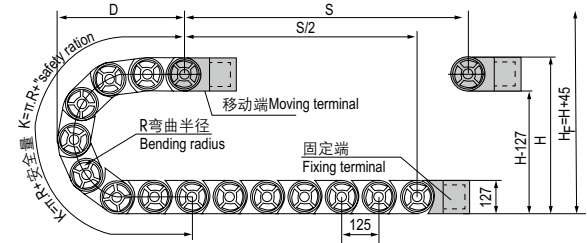

节距=125mm, 每米节数=8, 链长=S/2+K, S=行程距离, K=π.R+“安全量”
Pitch=125mm, link per meter=8, length of chain=S/2+K, S=stroke. K=π.R+“safety ration”

R	175	200	250	300	350	400	500
H	477	527	627	727	827	927	1127
D	364	389	439	489	539	589	689
K	875	1000	1125	1250	1375	1625	1875

安装实际高度 :H_F=H+45mm(负载 85kg/m)

Actual mounting height:H_F=H+45mm(load 85kg/m)




拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters									
							可配接头类型 Applicable bracket type	孔径 Bore diameter Φ1	孔距 (mm)hole distance						接头代号 Bracket No.	
									A	B	C	D	E	F		
JN100Q.1.75S	100	75	127	135	Q.W	175,200,250, 300,350,400, 500		F-Q	9	35	103	153	66	20	135	JN100Q.1.75S-FJT
JN100Q.1.85S	100	85	127	145	Q.W			F-Q	9	35	113	153	66	20	145	JN100Q.1.85S-FJT
JN100Q.1.100S	100	100	127	160	Q.W			F-Q	9	35	128	153	66	20	160	JN100Q.1.100S-FJT
JN100Q.1.125S	100	125	127	185	Q.W			F-Q	9	35	153	153	66	20	185	JN100Q.1.125S-FJT
JN100Q.1.150S	100	150	127	210	Q.W			F-Q	9	35	178	153	66	20	210	JN100Q.1.150S-FJT
JN100Q.1.200S	100	200	127	260	Q.W			F-Q	9	35	228	153	66	20	260	JN100Q.1.200S-FJT
JN100Q.1.250S	100	250	127	310	Q.W			F-Q	9	35	278	153	66	20	310	JN100Q.1.250S-FJT
JN100Q.1.300S	100	300	127	360	Q.W			F-Q	9	35	328	153	66	20	360	JN100Q.1.300S-FJT
JN100Q.1.350S	100	350	127	410	Q.W			F-Q	9	35	378	153	66	20	410	JN100Q.1.350S-FJT
JN100Q.1.400S	100	400	127	460	Q.W			F-Q	9	35	428	153	66	20	460	JN100Q.1.400S-FJT
JN100Q.1.500S	100	500	127	560	Q.W		F-Q	9	35	528	153	66	20	560	JN100Q.1.500S-FJT	
JN100Q.1.600S	100	600	127	660	Q.W		F-Q	9	35	628	153	66	20	660	JN100Q.1.600S-FJT	

单位 (unit): mm

注: Q.S 表示桥式外侧开, F-Q 表示: 桥式方型接头, 不同序号表示安装孔的不同排列样式

Note: Q.S Bridge type exterior opening, F-Q: bridge type square bracket, Different serial number indicates the difference rank type of fixing holes

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

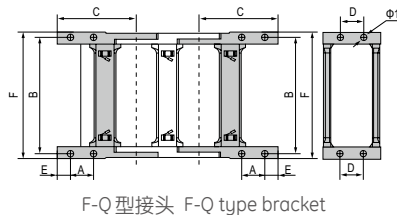

F-Q 型接头 F-Q type bracket



* 可选导向槽配套 Optional: Guide supporting solution 详见 See P092

订货示例 Order Example

示例 拖链内高 100mm、内宽 100mm、半径 175mm、长度 1 米 /8 节 (Sample: inner height 100mm, inner width 100mm, radius 175mm, length 8 links/1 meter)

拖链 chain JN100Q.1.100S R175 1000mm /8 Links (实际长度 Physical length: ± 2mm)

接头 Connector JN100Q.1.100S-FJT 1 副 (Set)

配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)