


◎ 适用于直径 22 毫米以下线缆 Suitable for 22mm or less of cable.

主要技术参数 Basic technical data

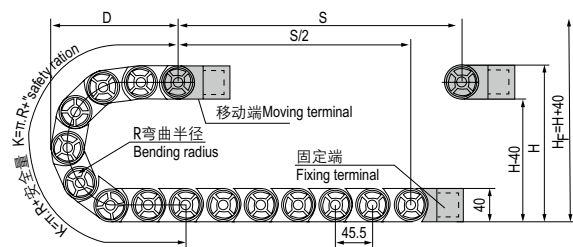


节距=45.5mm, 每米节数=22, 链长=S/2+K, S=行程距离, K=π.R+“安全量”
Pitch=45.5mm, link per meter=22, length of chain=S/2+K, S=stroke. K=π.R+“safety ration”

R	75	100	125	150	175	200	225
H	190	240	290	340	390	440	490
D	141	166	191	216	241	266	291
K	368	414	506	598	644	736	828

安装实际高度:H_F=H+40mm(负载 2kg/m)

Actual mounting height:H_F=H+40mm(load 2kg/m)

示意图 Drawing

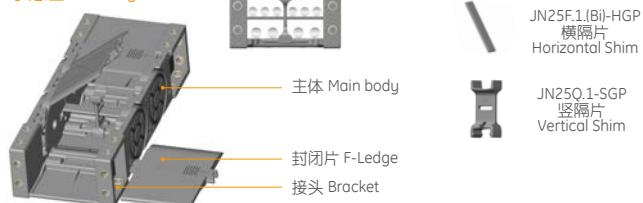


拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters								
							可配接头类型 Applicable bracket type	孔径 Bore diameter Φ1	孔距 (mm)hole distance						接头代号 Bracket No.
									A	B	C	D	E	F	
JN25F.1.38W	25	38	40	58	F.W	75,100,125 150,175,200 225	X ₆₋₁	6.5*10	24	24	60	9.5	58	JN25F.1.38W-XJT	
							F-F	4.5	16	50	65	16	10	62	JN25F.1.38W-FJT
JN25F.1.57W	25	57	40	77	F.W		X ₆₋₁	6.5*10	24	45	60		9.5	77	JN25F.1.57W-XJT
							F-F	4.5	16	69	65	16	10	81	JN25F.1.57W-FJT
JN25F.1.77W	25	77	40	97	F.W		X ₈	6.5*10	24	65	60		9.5	97	JN25F.1.77W-XJT
							F-F	4.5	16	89	65	16	10	101	JN25F.1.77W-FJT
JN25F.1.103W	25	103	40	123	F.W		X ₈	6.5*10	24	84	60		9.5	123	JN25F.1.103W-XJT
							F-F	4.5	16	115	65	16	10	127	JN25F.1.103W-FJT

单位 (unit): mm

注: F.W 表示封闭外侧开, F-F 表示: 封闭方型接头, 不同序号表示安装孔的不同排列样式

Note: F.W Enclosed type exterior opening, F-F: enclosed type bracket, Different serial number indicates the difference rank type of fixing holes

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

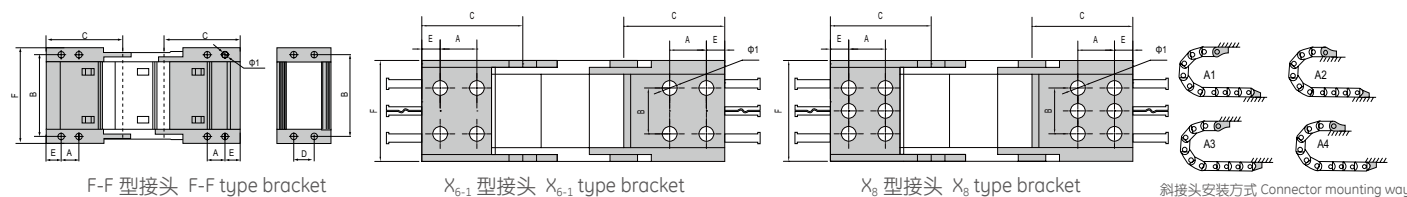

* 可选导向槽配套 Optional: Guide supporting solution 详见 See P092

订货示例 Order Example

示例 拖链内高 25mm、内宽 25mm、半径 75mm、长度 1 米 /22 节 (Sample: inner height 25mm, inner width 25mm, radius 75mm, length 22 links/1 meter)

拖链 chain JN25F.1.25W R75 1000mm /22 Links (实际长度 Physical length: ± 2mm)

接头 Bracket JN25F.1.25W-FJT 1 副 (Set)

配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)