



JN35F.1.W 系列 - 封闭外侧开


Series of JN35F.1.W-Enclosed type exterior opening

JFLO®



◎ 适用于直径 30 毫米以下线缆 Suitable for 30mm or less of cable.

主要技术参数 Basic technical data

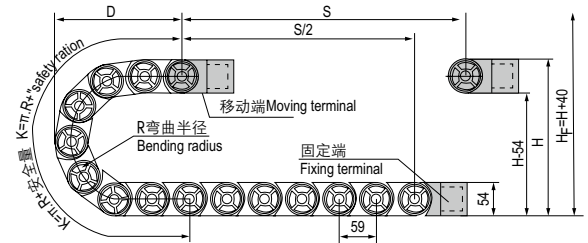


节距=59mm, 每米节数=17, 链长=S/2+K, S=行程距离, K=π.R+“安全量”
Pitch=59mm, link per meter=17, length of chain=S/2+K, stroke.K=π.R+“safety ration”

R	100	125	150	175	200	250
H	254	304	354	404	454	554
D	186	211	236	261	286	336
K	472	531	590	708	767	944

安装实际高度:H_F=H+40mm(负载 12kg/m)

Actual mounting height:H_F=H+40mm(load 12kg/m)

示意图 Drawing

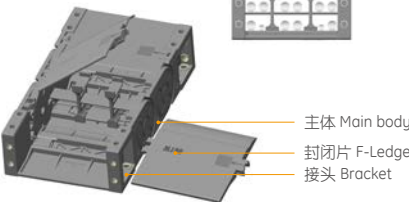


拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters									
							可配接头类型 Applicable bracket type	孔径 Bore diameter Φ1	孔距 (mm)hole distance						接头代号 Bracket No.	
									A	B	C	D	E	F		
JN35F.1.50W	35	50	54	76	F.W	100,125 150,175 200,250	X ₂		6.2*19L		30	59		17	74	JN35F.1.50W-XJT
							F-F		6.2	22.5	64	83	22	14	79	JN35F.1.50W-FJT
JN35F.1.75W	35	75	54	101	F.W		X ₂		6.2*19L		55	59		17	99	JN35F.1.75W-XJT
							F-F		6.2	22.5	89	83	22	14	104	JN35F.1.75W-FJT
JN35F.1.100W	35	100	54	126	F.W		X ₂		6.2*19L		80	59		17	124	JN35F.1.100W-XJT
							F-F		6.2	22.5	114	83	22	14	129	JN35F.1.100W-FJT
JN35F.1.125W	35	125	54	151	F.W		X ₂		6.2*19L		105	59		17	149	JN35F.1.125W-XJT
							F-F		6.2	22.5	139	83	22	14	154	JN35F.1.125W-FJT
JN35F.1.150W	35	150	54	176	F.W		X ₂		6.2*19L		130	59		17	174	JN35F.1.150W-XJT
							F-F		6.2	22.5	164	83	22	14	179	JN35F.1.150W-FJT
JN35F.1.175W	35	175	54	201	F.W		F-F		6.2	22.5	189	83	22	14	204	JN35F.1.175W-FJT
JN35F.1.200W	35	200	54	226	F.W		F-F		6.2	22.5	214	83	22	14	229	JN35F.1.200W-FJT

单位 (unit): mm


注: F.W 表示封闭外侧开, F-F 表示: 封闭型型接头, 不同序号表示安装孔的不同排列样式

Note: F.W Enclosed type exterior opening, F-F: enclosed type bracket, Different serial number indicates the difference rank type of fixing holes


固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

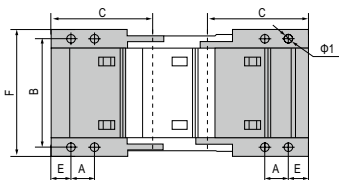

F-F 型接头 F-F type bracket



X₂ 型接头 X₂ type bracket

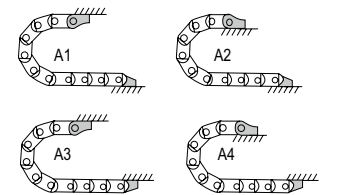

斜接头安装方式 Connector mounting way

订货示例 Order Example

示例 拖链内高 35mm、内宽 50mm、半径 75mm、长度 1 米 /20 节 (Sample: inner height 35mm, inner width 50mm, radius 75mm, length 20 links/1 meter)

拖链 chain JN35F.1.50W R75 1000mm /20 Links (实际长度 Physical length: ±2mm)

接头 Bracket JN35F.1.50W-FJT 1 副 (Set)

配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)



* 可选导向槽配套 Optional: Guide supporting solution 详见 See P092