


◎ 适用于直径 30 毫米以下线缆 Suitable for 30mm or less of cable.

主要技术参数 Basic technical data

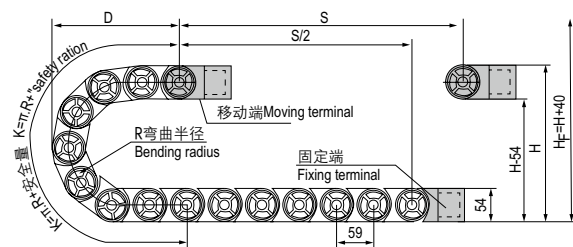


节距=59mm, 每米节数=17, 链长=S/2+K, S=行程距离, K=π·R+“安全量”
Pitch=59mm, link per meter=17, length of chain=S/2+K, S=stroke. K=π·R+“safety ration”

R	63	75	100	125	150	175	200	250
H	180	204	254	304	354	404	454	554
D	149	161	186	211	236	261	286	336
K	354	354	472	531	590	708	767	944

安装实际高度: $H_f = H + 40\text{mm}$ (负载 12kg/m)

Actual mounting height: $H_f = H + 40\text{mm}$ (load 12kg/m)

示意图 Drawing

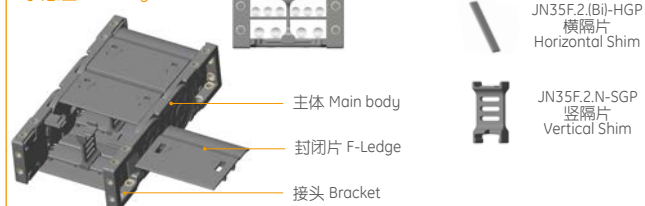


拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters									
							可配接头类型 Applicable bracket type	孔径 Bore diameter Φ1	孔距 (mm)hole distance						接头代号 Bracket No.	
									A	B	C	D	E	F		
JN35F.2.90N	35	90	54	114	F.N	63,75,100 125,150,175, 200,250		F-F	6	16	69	61.5	16	10	81	JN35F.2.90N-FJT

单位 (unit): mm

注: N 表示内侧打开 Note: N indicates that the interior opening

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

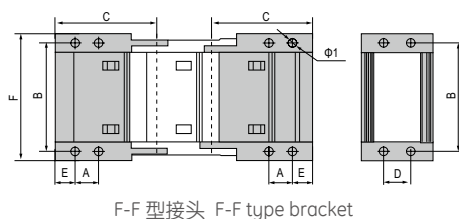

F-F 型接头 F-F type bracket



* 可选导向槽配套 Optional: Guide supporting solution 详见 See P092

订货示例 Order Example

示例 拖链内高 35mm、内宽 90mm、半径 63mm、长度 1 米 /17 节 (Sample: inner height 35mm, inner width 90mm, radius 63mm, length 17 links/1 meter)

拖链 Chain JN35F.2.90N R63 1000mm /17 Links (实际长度 Physical length: $\pm 2\text{mm}$)

接头 Bracket JN35F.2.90N-FJT 1 副 (Set)

配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)