



JN55F.1.W 系列 - 封闭外侧开


Series of JN55F.1.W-Enclosed type exterior opening

JFLO®



◎ 适用于直径 50 毫米以下线缆 Suitable for 50mm or less of cable.

主要技术参数 Basic technical data

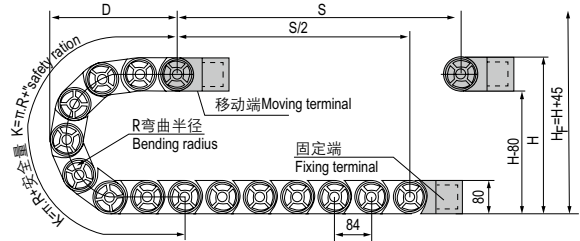


节距=84mm, 每米节数=12, 链长=S/2+K, S=行程距离, K=π.R+“安全量”
Pitch=84mm, link per meter=12, length of chain=S/2+K, S=stroke. K=π.R+“safety ration”

R	125	150	200	250	300	350
H	330	380	480	580	680	780
D	249	274	324	374	424	474
K	588	672	840	1008	1176	1344

安装实际高度 :H_F=H+45mm(负载 35kg/m)

Actual mounting height:H_F=H+45mm(load 35kg/m)

示意图 Drawing

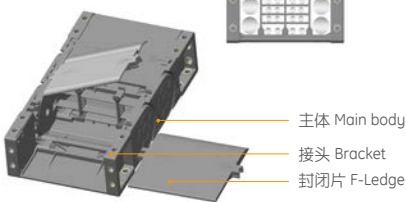


拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters									
							可配接头类型 Applicable bracket type		孔径 Bore diameter Φ1	孔距 (mm)hole distance						接头代号 Bracket No.
										A	B	C	D	E	F	
JN55F.1.75W	55	75	80	113	F.W	125 150,200 250,300 350		F-F	9	35	97	128	30	20	117	JN55F.1.75W-FJT
JN55F.1.100W	55	100	80	138	F.W			F-F	9	35	122	128	30	20	142	JN55F.1.100W-FJT
JN55F.1.125W	55	125	80	163	F.W			F-F	9	35	147	128	30	20	167	JN55F.1.125W-FJT
JN55F.1.150W	55	150	80	188	F.W			F-F	9	35	172	128	30	20	192	JN55F.1.150W-FJT
JN55F.1.175W	55	175	80	213	F.W			F-F	9	35	197	128	30	20	217	JN55F.1.175W-FJT
JN55F.1.200W	55	200	80	238	F.W			F-F	9	35	222	128	30	20	242	JN55F.1.200W-FJT

注: F.W 表示封闭外侧开, F-F 表示: 封闭方型接头, 不同序号表示安装孔的不同排列样式

Note: F.W Enclosed type exterior opening, F-F: enclosed type bracket, Different serial number indicates the difference rank type of fixing holes

单位 (unit): mm

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

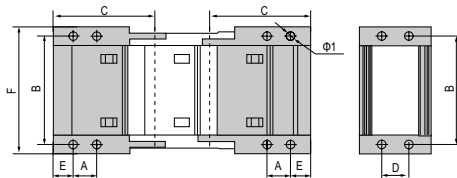

F-F 型接头 F-F type bracket



* 可选导向槽配套 Optional: Guide supporting solution 详见 See P092

订货示例 Order Example

示例 拖链内高 55mm、内宽 75mm、半径 125mm、长度 1 米 /12 节 (Sample: inner height 55mm, inner width 75mm, radius 125mm, length 12 links/1 meter)

拖链 chain JN55F.1.75W R125 1000mm /12 Links (实际长度 Physical length: ± 2mm)

接头 Connector JN55F.1.75W-FJT 1 副 (Set)

配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)