


◎ 适用于直径 60 毫米以下线缆 Suitable for 60mm or less of cable.

主要技术参数 Basic technical data

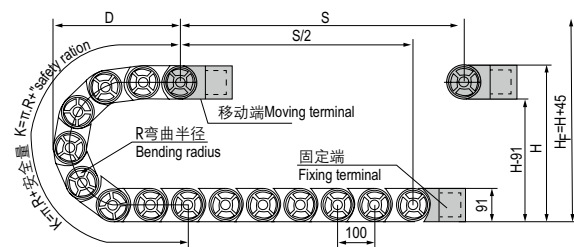


节距=100mm, 每米节数=10, 链长=S/2+K, S=行程距离, $K=\pi \cdot R$ "安全量"
Pitch=100mm, link per meter=10, length of chain=S/2+K, S=stroke. $K=\pi \cdot R$ "safety ration"

R	135	150	175	200	250	300	350
H	361	391	441	491	591	691	791
D	281	296	321	346	396	446	496
K	600	700	800	900	1000	1200	1300

安装实际高度: $H_f=H+45\text{mm}$ (负载 40kg/m)

Actual mounting height: $H_f=H+45\text{mm}$ (load 40kg/m)

示意图 Drawing



挡片 Ledge

主体 Main body

接头 Bracket

JN65Q.1(B)-HGP
横隔片
Horizontal Shim



JN65Q.1(S)-SGP
竖隔片
Vertical Shim


拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters								
							可配接头类型 Applicable bracket type	孔径 Bore diameter $\Phi 1$	孔距 (mm) hole distance						接头代号 Bracket No.
JN65Q.1.75W	65	75	91	115	Q.W	135,150,175 200,250,300 350	F-Q	9	35	97	135	45	20	119	JN65Q.1.75W-FJT
JN65Q.1.100W	65	100	91	140	Q.W		F-Q	9	35	122	135	45	20	144	JN65Q.1.100W-FJT
JN65Q.1.125W	65	125	91	165	Q.W		F-Q	9	35	147	135	45	20	169	JN65Q.1.125W-FJT
JN65Q.1.150W	65	150	91	190	Q.W		F-Q	9	35	172	135	45	20	194	JN65Q.1.150W-FJT
JN65Q.1.175W	65	175	91	215	Q.W		F-Q	9	35	197	135	45	20	219	JN65Q.1.175W-FJT
JN65Q.1.200W	65	200	91	240	Q.W		F-Q	9	35	222	135	45	20	244	JN65Q.1.200W-FJT
JN65Q.1.250W	65	250	91	290	Q.W		F-Q	9	35	272	135	45	20	294	JN65Q.1.250W-FJT
JN65Q.1.300W	65	300	91	340	Q.W		F-Q	9	35	322	135	45	20	344	JN65Q.1.300W-FJT

单位 (unit): mm

注: Q.W 表示桥式外侧开, F-Q 表示: 桥式方型接头, 不同序号表示安装孔的不同排列样式

Note: Q.W Bridge type exterior opening, F-Q: bridge type square bracket, Different serial number indicates the difference rank type of fixing holes

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

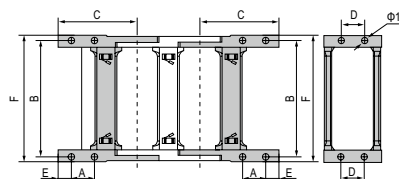

F-Q 型接头 F-Q type bracket

订货示例 Order Example

示例 拖链内高 65mm、内宽 75mm、半径 125mm、长度 1 米 /10 节 (Sample: inner height 65mm, inner width 75mm, radius 125mm, length 10 links/1 meter)

拖链 chain JN65Q.1.75W R125 1000mm /10 Links (实际长度 Physical length: $\pm 2\text{mm}$)

接头 Connector JN65Q.1.75W-FJT 1 副 (Set)

配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)



* 可选导向槽配套 Optional: Guide supporting solution 详见 See P092