


◎ 适用于直径 75 毫米以下线缆 Suitable for 75mm or less of cable.

### 主要技术参数 Basic technical data

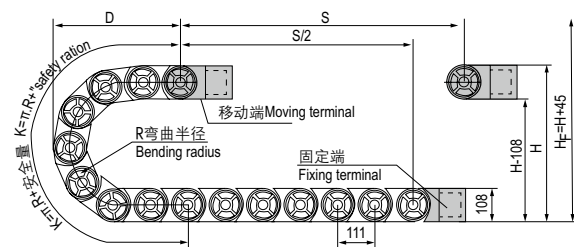

节距=111mm, 每米节数=9, 链长=S/2+K, S=行程距离, K=π.R+"安全量"  
Pitch=111mm, link per meter=9, length of chain=S/2+K, S=stroke. K=π.R+"safety ration"

| R | 150 | 200 | 250  | 300  | 350  | 400  | 500  |
|---|-----|-----|------|------|------|------|------|
| H | 408 | 508 | 608  | 708  | 808  | 908  | 1108 |
| D | 315 | 365 | 415  | 465  | 515  | 565  | 665  |
| K | 777 | 888 | 1110 | 1221 | 1332 | 1554 | 1887 |

安装实际高度:H<sub>F</sub>=H+45mm(负载 70kg/m)

Actual mounting height:H<sub>F</sub>=H+45mm(load 70kg/m)

示意图 Drawing

JN80Q.1.S-SGP-  
LDP 竖隔片  
Vertical Shim



JN80Q.1.S-SGP  
竖隔片  
Vertical Shim




| 拖链型号<br>Cable Chain<br>No. | 内高<br>Hi | 内宽<br>Bi | 外高<br>Ha | 外宽<br>Ba | 款式<br>Styles | 弯曲半径<br>Bending<br>radius<br>R      | 固定接头类型及参数 Bracket type and parameters |                           |                      |     |     |    |    |     |                     |
|----------------------------|----------|----------|----------|----------|--------------|-------------------------------------|---------------------------------------|---------------------------|----------------------|-----|-----|----|----|-----|---------------------|
|                            |          |          |          |          |              |                                     | 可配接头类型<br>Applicable<br>bracket type  | 孔径<br>Bore diameter<br>φ1 | 孔距 (mm)hole distance |     |     |    |    |     | 接头代号<br>Bracket No. |
|                            |          |          |          |          |              |                                     |                                       |                           | A                    | B   | C   | D  | E  | F   |                     |
| JN80Q.1.75S                | 85       | 75       | 108      | 127      | Q.W          | 150,200,250,<br>300,350,400,<br>500 | F-Q                                   | 9                         | 35                   | 103 | 140 | 66 | 20 | 127 | JN80Q.1.75S-FJT     |
| JN80Q.1.85S                | 85       | 85       | 108      | 137      | Q.W          |                                     | F-Q                                   | 9                         | 35                   | 113 | 140 | 66 | 20 | 137 | JN80Q.1.85S-FJT     |
| JN80Q.1.100S               | 85       | 100      | 108      | 152      | Q.W          |                                     | F-Q                                   | 9                         | 35                   | 128 | 140 | 66 | 20 | 152 | JN80Q.1.100S-FJT    |
| JN80Q.1.125S               | 85       | 125      | 108      | 177      | Q.W          |                                     | F-Q                                   | 9                         | 35                   | 153 | 140 | 66 | 20 | 177 | JN80Q.1.125S-FJT    |
| JN80Q.1.150S               | 85       | 150      | 108      | 202      | Q.W          |                                     | F-Q                                   | 9                         | 35                   | 178 | 140 | 66 | 20 | 202 | JN80Q.1.150S-FJT    |
| JN80Q.1.200S               | 85       | 200      | 108      | 252      | Q.W          |                                     | F-Q                                   | 9                         | 35                   | 228 | 140 | 66 | 20 | 252 | JN80Q.1.200S-FJT    |
| JN80Q.1.250S               | 85       | 250      | 108      | 302      | Q.W          |                                     | F-Q                                   | 9                         | 35                   | 278 | 140 | 66 | 20 | 302 | JN80Q.1.250S-FJT    |
| JN80Q.1.300S               | 85       | 300      | 108      | 352      | Q.W          |                                     | F-Q                                   | 9                         | 35                   | 328 | 140 | 66 | 20 | 352 | JN80Q.1.300S-FJT    |
| JN80Q.1.350S               | 85       | 350      | 108      | 402      | Q.W          |                                     | F-Q                                   | 9                         | 35                   | 378 | 140 | 66 | 20 | 402 | JN80Q.1.350S-FJT    |
| JN80Q.1.400S               | 85       | 400      | 108      | 452      | Q.W          |                                     | F-Q                                   | 9                         | 35                   | 428 | 140 | 66 | 20 | 452 | JN80Q.1.400S-FJT    |
| JN80Q.1.500S               | 85       | 500      | 108      | 552      | Q.W          |                                     | F-Q                                   | 9                         | 35                   | 528 | 140 | 66 | 20 | 552 | JN80Q.1.500S-FJT    |
| JN80Q.1.600S               | 85       | 600      | 108      | 652      | Q.W          |                                     | F-Q                                   | 9                         | 35                   | 628 | 140 | 66 | 20 | 652 | JN80Q.1.600S-FJT    |

注: Q.S 表示桥式外侧开, F-Q 表示: 桥式方型接头, 不同序号表示安装孔的不同排列样式

单位 (unit): mm

Note: Q.S Bridge type exterior opening, F-Q: bridge type square bracket, Different serial number indicates the difference rank type of fixing holes

### 固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

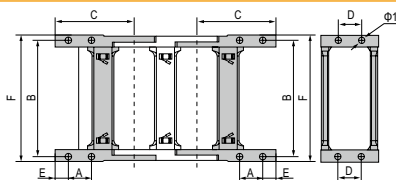

F-Q 型接头 F-Q type bracket

### 订货示例 Order Example

示例 拖链内高 85mm、内宽 75mm、半径 150mm、长度 1 米 / 9 节 (Sample: inner height 85mm, inner width 75mm, radius 150mm, length 9 links/1 meter)

拖链 chain JN80Q.1.75S R150 1000mm / 9 Links (实际长度 Physical length: ± 2mm)

接头 Connector JN80Q.1.75S-FJT 1 副 (Set)

配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)



\* 可选导向槽配套 Optional: Guide supporting solution 详见 See P092