

Description

Advanced digital proportional dosing pump system with an LCD display suitable for pH/Chlorine control. With PPM real time display of Chlorine concentration.

Features

- Double system with built in pH Chlorine and T° controller
- Flow rate display in percentage
- 3 different functioning mode: constant, ON / OFF, proportional
- Menu available in 4 languages: ITALIAN, ENGLISH, FRANCE, SPANISH
- Password protected
- Start up delay
- Time overdose alarm
- Default parameter restore option
- pH Stability mode (settable)
- STAND BY modality
- Over / under range signal
- Backlit LCD
- PP reinforced case
- IP 65
- 230vac 50-60 Hz standard power supply
- Level probe input
- Flow sensor input
- ON / OFF switch
- Alarm relay (free contact)



Materials

	Standard material	Optional
Case	PP reinforced with fiberglass	-
Rollers	DELFIN	-
Tube	Santopren	-
Power consumption	8 Watts	-
Nuts	PP M10	-
Fittings	PP 4 x 6	-
Probe connection	BNC	-
Foot filter valve	Lip Valve	-
Suction tube	PVC 4 x 6	-
Delivery tube	PE 4 x 6	-

Technical data

Standard	Flow max l/h	Pressure bar	Max cc / min	Santoprene tube	Case	Power c Watt	rpm	Weight kg
PH Pump	1.5	1	65	25	Santoprene	19	10	8
Chlorine pump	3 6	1	50 100	5,8 x 9,3	PP	19	20 40	3.6


Verderflex

VP Dual pH-Chlorine double peristaltic system



Dimensions

(in mm)

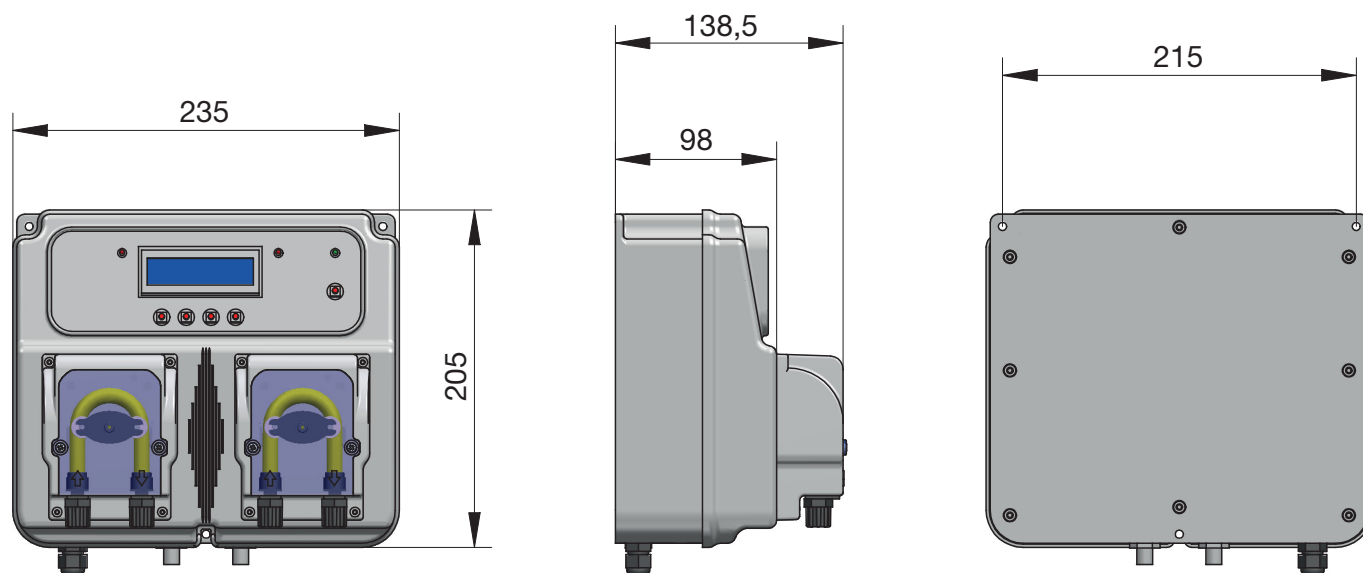

Standard installation kit

1/2" PP-VL-VT Lip	Foot Filter PP-VL-VT	Suction tube 2 m PVC 4x6	Delivery tube 2 m PE 4x6

flex_VP-Dual-pH-Chlorine_2016_rev1_UK-(uk)

VERDERFLEX®



**Find your local supplier
at www.verderflex.com**

For construction, installation and mounting drawings
please contact your local authorised Verderdos distributor.

VERDER
passion for pumps

Description

Advanced digital proportional dosing pump system with an LCD display suitable for pH/Redox control.

Features

- Double system with built in pH Redox and T° controller
- Flow rate display in percentage
- 3 different functioning mode: constant, ON / OFF, proportional
- Password protected
- Start up delay
- Time overdose alarm
- Alarm relay (free contact)
- Default parameter restore option
- pH Stability mode (settable)
- STAND BY modality
- Over / under range signal
- Backlit LCD
- IP 65
- 230 VAC 50-60 Hz
- Level probe input
- Low sensor input
- ON / OFF switch
- Including SCHUKO plug



Materials

	Standard material	Optional
Pump body	PP	-
Roller	DELTRIN	-
Tube	Santoprene	-
Power consumption	8 Watt	-
Nuts	PP M10	-
Fittings	PP tube 4 x 6	-
Probe connection	BNC	-
Foot filter	Lip valve	-
Suction tube	PVC 4 x 6	-
Delivery tube	PE 4 x 6	-

Technical data


Standard	Flow max l/h	Pressure bar	Max opera- ting temp °C	Max cc/min	Tube material	tube int x ext mm	Body pump	Power c Watt	rpm	Weight kg
pH pump	1.5	1	65	25	Santoprene	5.8 x 9.3	PP	19	10	8
Redox pump	3 6	1	65	50 100	Santoprene	5.8 x 9.3	PP	19	20 40	3.6

Verderflex

VP Dual pH-Redox double peristaltic system

Dimensions

(in mm)

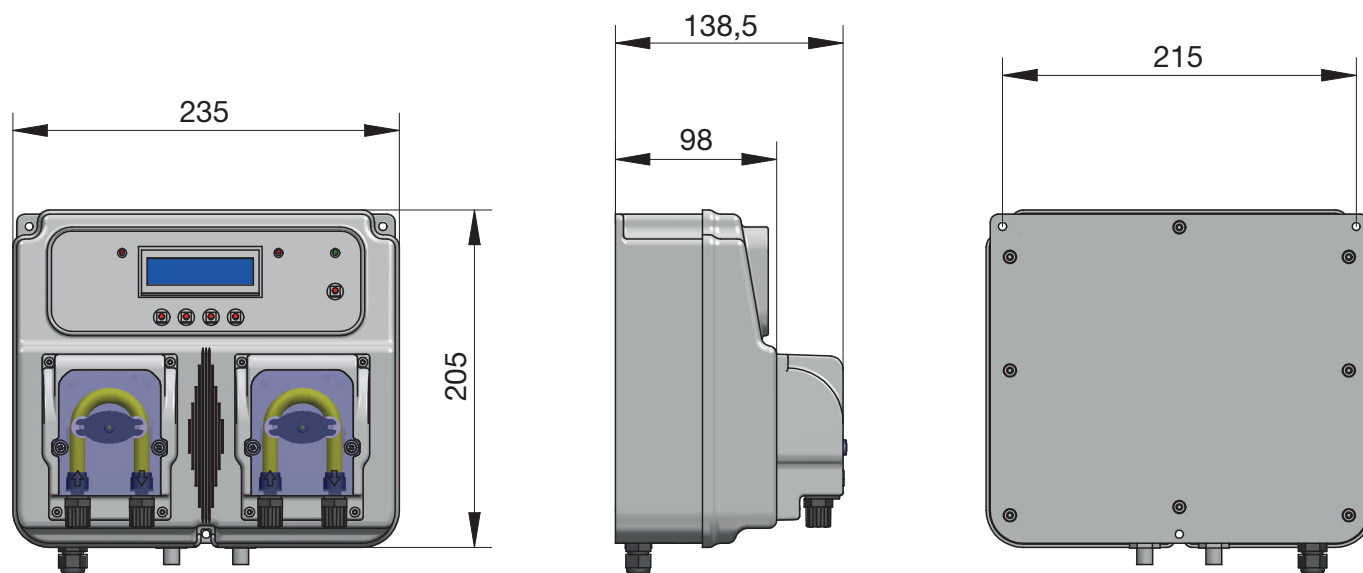

Standard installation kit

1/2" PP-VL-VT Lip	Foot Filter PP-VL-VT	Suction tube 2 m PVC 4x6	Delivery tube 2 m PE 4x6
			

flex_VP-Dual-pH-Rx_2016_rev1_UK-(uk)

VERDERFLEX®



**Find your local supplier
at www.verderflex.com**

For construction, installation and mounting drawings
please contact your local authorised Verderdos distributor.

VERDER
passion for pumps