

iGERCN

CREDIT CARD



About the technologies and problems of products,
please login our company website or Send E-mail to us!



iGERCN[®]

iGERCN

YUEQING IGER ELECTRIC CO.,LTD.

Add: B27,Aviation Industrial Park,CHINA WITHUB,West Zhiyuan Road ,
National High-tech Industrial Development Zone,jingdezhen City,
Jiangxi Province,China

Tel: +86-577-62731309

Fax: +86-577-27875953

MT: 13968771068

E-mail:sales@igercn.com

Skype:juanlia.iger

www.igercn.com



iGERCN

铜管端子系列
TERMINAL-LUG
Series

YUEQING IGER ELECTRIC CO.,LTD.

Why MHD?

乐清市伊格电器有限公司是一家集研发、制造、销售、服务为一体的科技型企业。公司拥有标准化的工业厂房，拥有自动化好铜管端子的流水线。自动化生产流水线和产品模具均有公司自行设计研发和制作，确保了产品的一流品质和极具竞争力的产品价格。

公司生产的接线端子（亦称铜离子）广泛应用于国内外控制柜、变压器、电力电器、线束制造、铁路、通讯，船舶、航天、光伏、风电等行业和领域。公司始终以创新为原动力，每年大量资金用于技术创新和研发投入，苦心钻研于先进生产设备及工艺，参照美国、日本、德国等先进工业国家的工艺。

公司秉承奋斗目标“质呈为先，诚信为本”的公司宗旨，竭诚为广大用户提供产品和服务。乐清市伊格电气有限公司热情欢迎海内外朋友莅临指导！

The mission of IGERCN is design, manufacturing and distribution of electrical connection elements, products for electric installation and for electricians.

With its inborn attitude for quality, MHD is always aiming to realize solutions with a high technological content, which would anticipate the needs of the contemporary market.

QUALITY FROM BEGINNING TO END

YUEQING IGER ELECTRIC CO.,LTD. located at China includes a highly automated production, packaging and distribution system for articles sent around the world. The continuous innovation of industrial processes has enabled us to manufacture high-quality products using integrated production cycles, on the basis of strict international standards. Today, the goal we strive to achieve at company level remains that of guaranteeing ever better quality.

Product Range

The diversity between electrical installations and their complexity consequently involve the need to be able to use a wide range of components suitable to specific needs. So here that IGERCN distinguished itself for its wide range of cable & wire solution.

range of cable & wire solution.

6 Reasons to do business with IGERCN

- IGERCN is a total solution provider for the wire connectors & terminals.
- IGERCN develops and manufactures product moulds in-house.
- IGERCN understands that competitive price is a key element for success.
- IGERCN Way of Total Quality Management
- IGERCN always has enough machines to keep quick delivery.
- IGERCN has a team of skilled engineers that provide top after-sale service



iGERCN®




Terminal-lug Content

TL 铜管端子/ Copper Tube Terminals	page 02
SC 铜管端子/ Copper Tube Terminals	page 06
T 铜管端子/ Copper Tube Terminals	page 10
TL-NH 铜管端子/ Copper Tube Terminals	page 14
SC-NH 铜管端子/ Copper Tube Terminals	page 18
LCL 铜管端子/ Copper Tube Terminals	page 22
SCL 铜管端子/ Copper Tube Terminals	page 25
TTL 铜管端子/ Copper Tube Terminals	page 28
TSC 铜管端子/ Copper Tube Terminals	page 31
SL 铜管端子/ Copper Tube Terminals	page 35
L 铜管端子/ Copper Tube Terminals	page 36
P 铜管端子/ Copper Tube Terminals	page 37
DTL1/DTL2 铜铝端子/ Bi-metal Lugs	page 38
液压压接钳 Hydraulic Crimping Tools	page 39-41


iGERCN®
Fully Automatic Production Machine
for the Lugs

TL 铜管端子
Copper Tube Terminals

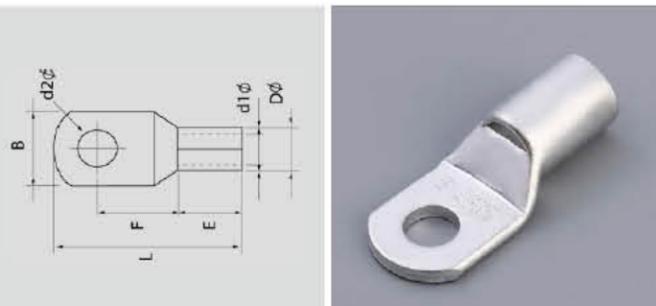


项目/Items	d2	d1	D	B	E	F	L
TL1.5-3	3.2	2.2	3.7	8	7	7	20
TL1.5-4	4.2	2.2	3.7	8	7	7	20
TL1.5-5	5.2	2.2	3.7	10	7	7	20
TL1.5-6	6.2	2.2	3.7	10	7	7	20
TL2.5-3	3.2	2.4	3.9	8	7	7	20
TL2.5-4	4.2	2.4	3.9	8	7	7	20
TL2.5-5	5.2	2.4	3.9	10	7	7	20
TL2.5-6	6.2	2.4	3.9	10	7	7	20
TL4-4	4.2	2.8	4.5	10	7	8	20
TL4-5	5.2	2.8	4.5	10	7	8	20
TL4-6	6.2	2.8	4.5	10	7	8	20
TL4-8	8.2	2.8	4.5	12.5	7	8	20
TL6-4	4.2	3.8	5.5	10	9	9	24
TL6-5	5.2	3.8	5.5	10	9	9	24
TL6-6	6.2	3.8	5.5	10	9	9	24
TL6-8	8.2	3.8	5.5	12.5	9	9	27
TL6-10	10.2	3.8	5.5	15	9	9	27
TL10-4	4.2	4.5	6.2	10	9	10	25
TL10-5	5.2	4.5	6.2	10	9	10	25
TL10-6	6.2	4.5	6.2	10	9	10	25
TL10-8	8.2	4.5	6.2	12.5	9	10	27
TL10-10	10.2	4.5	6.2	15	9	10	27
TL16-5	5.2	5.4	7.1	10	12	11	27
TL16-6	6.2	5.4	7.1	10	12	11	27
TL16-8	8.2	5.4	7.1	12.5	12	11	30
TL16-10	10.2	5.4	7.1	15	12	11	30
TL16-12	12.5	5.4	7.1	16.5	12	11	30

TL 铜管端子
Copper Tube Terminals

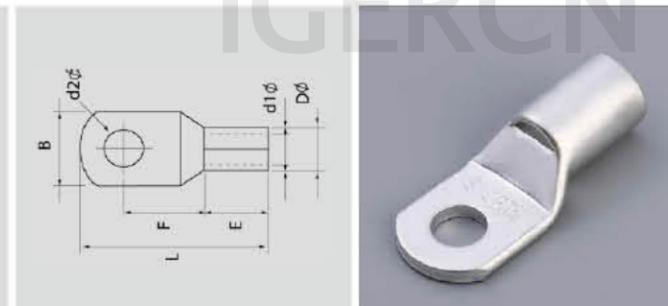


项目/Items	d2	d1	D	B	E	F	L
TL25-5	5.2	6.8	8.8	12.5	13	12	30
TL25-6	6.2	6.8	8.8	12.5	13	12	30
TL25-8	8.2	6.8	8.8	12.5	13	12	30
TL25-10	10.2	6.8	8.8	15	13	12	32
TL25-12	12.5	6.8	8.8	17	13	12	34
TL35-5	5.5	8.2	10.6	15	14	14	35
TL35-6	6.5	8.2	10.6	15	14	14	35
TL35-8	8.5	8.2	10.6	15	14	14	35
TL35-10	10.5	8.2	10.6	15	14	14	37
TL35-12	12.5	8.2	10.6	18.5	14	14	37
TL35-14	14.5	8.2	10.6	19	14	14	37
TL50-6	6.5	9.5	12.4	18	16	17	43
TL50-8	8.5	9.5	12.4	18	16	17	43
TL50-10	10.5	9.5	12.4	18	16	17	43
TL50-12	12.5	9.5	12.4	19	16	17	45
TL50-14	15	9.5	12.4	21	16	17	45
TL70-6	6.5	11.2	14.7	21	18	20	48
TL70-8	8.5	11.2	14.7	21	18	20	48
TL70-10	11	11.2	14.7	21	18	20	48
TL70-12	12.5	11.2	14.7	21	18	20	48
TL70-14	15	11.2	14.7	21	18	20	48
TL70-16	17	11.2	14.7	24	18	20	48
TL95-6	6.5	13.5	17.4	25.5	20	22	54
TL95-8	8.5	13.5	17.4	25.5	20	22	54
TL95-10	10.5	13.5	17.4	25.5	20	22	54
TL95-12	13	13.5	17.4	25.5	20	22	54
TL95-14	15	13.5	17.4	25.5	20	22	54
TL95-16	17	13.5	17.4	25.5	20	22	54

TL 铜管端子
Copper Tube Terminals

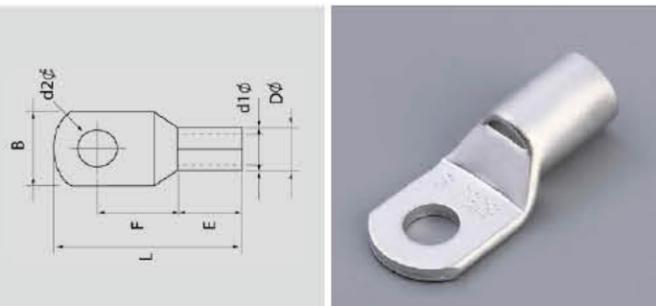


项目/Items	d2	d1	D	B	E	F	L
TL120-6	6.5	15	19.4	28	24	24	61
TL120-8	8.5	15	19.4	28	24	24	61
TL120-10	10.5	15	19.4	28	24	24	61
TL120-12	13	15	19.4	28	24	24	61
TL120-14	15	15	19.4	28	24	24	61
TL120-16	17	15	19.4	28	24	24	61
TL150-6	6.5	16.5	21.2	30.5	26	27	68
TL150-8	8.2	16.5	21.2	30.5	26	27	68
TL150-10	10.5	16.5	21.2	30.5	26	27	68
TL150-12	13	16.5	21.2	30.5	26	27	68
TL150-14	15	16.5	21.2	30.5	26	27	68
TL150-16	17	16.5	21.2	30.5	26	27	68
TL185-6	6.5	18.5	23.5	34	32	29	78
TL185-8	8.5	18.5	23.5	34	32	29	78
TL185-10	10.5	18.5	23.5	34	32	29	78
TL185-12	13	18.5	23.5	34	32	29	78
TL185-14	15	18.5	23.5	34	32	29	78
TL185-16	17	18.5	23.5	34	32	29	78
TL240-6	6.2	21	26.5	38.5	38	34	90
TL240-8	8.2	21	26.5	38.5	38	34	90
TL240-10	10.5	21	26.5	38.5	38	34	90
TL240-12	13	21	26.5	38.5	38	34	90
TL240-14	15	21	26.5	38.5	38	34	90
TL240-16	17	21	26.5	38.5	38	34	90
TL240-18	19	21	26.5	38.5	38	34	90
TL240-20	21	21	26.5	38.5	38	34	90
TL300-8	8.5	23.5	30	43.5	42	37	101
TL300-10	10.5	23.5	30	43.5	42	37	101
TL300-12	13	23.5	30	43.5	42	37	101
TL300-14	15	23.5	30	43.5	42	37	101

TL 铜管端子
Copper Tube Terminals

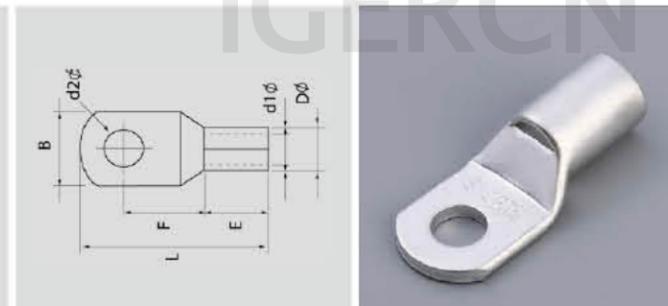


项目/Items	d2	d1	D	B	E	F	L
TL300-16	17	23.5	30	43.5	42	37	101
TL300-18	19	23.5	30	43.5	42	37	101
TL300-20	21	23.5	30	43.5	42	37	101
TL400-12	13	28.5	36.5	53	44	44	113
TL400-14	15	28.5	36.5	53	44	44	113
TL400-16	17	28.5	36.5	53	44	44	113
TL400-18	19	28.5	36.5	53	44	44	113
TL400-20	21	28.5	36.5	53	44	44	113
TL400-22	23	28.5	36.5	53	44	44	113
TL500-12	13	30	39	56	48	48	124
TL500-14	15	30	39	56	48	48	124
TL500-16	17	30	39	56	48	48	124
TL500-18	19	30	39	56	48	48	124
TL500-20	21	30	39	56	48	48	124
TL500-22	23	30	39	56	48	48	124
TL630-12	13	34.5	44	63.5	52	51	130
TL630-14	15	34.5	44	63.5	52	51	130
TL630-16	17	34.5	44	63.5	52	51	130
TL630-18	19	34.5	44	63.5	52	51	130
TL630-20	21	34.5	44	63.5	52	51	130
TL630-22	23	34.5	44	63.5	52	51	130
TL800-14	15	40	51.2	74	54	56	140
TL800-16	17	40	51.2	74	54	56	140
TL800-18	19	40	51.2	74	54	56	140
TL800-20	21	40	51.2	74	54	56	140
TL1000-14	15	44	56.6	81.5	60	56	146
TL1000-16	17	44	56.6	81.5	60	56	146
TL1000-18	19	44	56.6	81.5	60	56	146
TL1000-20	21	44	56.6	81.5	60	56	146
TL1000-22	23	44	56.5	81.5	60	56	146

SC 铜管端子
Copper Tube Terminals

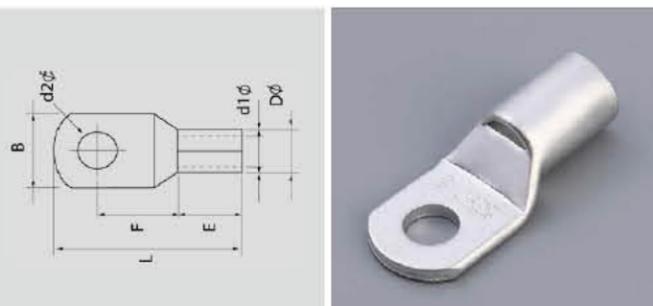


项目/Items	d2	d1	D	B	E	F	L
SC1.5-3	3.2	2.2	3.7	8	7	7	20
SC1.5-4	4.2	2.2	3.7	8	7	7	20
SC1.5-5	5.2	2.2	3.7	10	7	7	20
SC1.5-6	6.2	2.2	3.7	10	7	7	20
SC2.5-3	3.2	2.4	3.9	8	7	7	20
SC2.5-4	4.2	2.4	3.9	8	7	7	20
SC2.5-5	5.2	2.4	3.9	10	7	7	20
SC2.5-6	6.2	2.4	3.9	10	7	7	20
SC4-4	4.2	2.8	4.5	10	7	8	20
SC4-5	5.2	2.8	4.5	10	7	8	20
SC4-6	6.2	2.8	4.5	10	7	8	20
SC4-8	8.2	2.8	4.5	12.5	7	8	20
SC6-4	4.2	4.1	5.5	10	9	9	24
SC6-5	5.2	4.1	5.5	10	9	9	24
SC6-6	6.2	4.1	5.5	10	9	9	24
SC6-8	8.2	4.1	5.5	12	9	9	27
SC6-10	10.2	4.1	5.5	15	9	9	27
SC10-4	4.2	4.6	6.2	10	9	10	25
SC10-5	5.2	4.6	6.2	10	9	10	25
SC10-6	6.2	4.6	6.2	10	9	10	25
SC10-8	8.2	4.6	6.2	12.5	9	10	27
SC10-10	10.2	4.6	6.2	15	9	10	27
SC16-5	5.2	5.5	7.1	10	12	11	27
SC16-6	6.2	5.5	7.1	10	12	11	27
SC16-8	8.2	5.5	7.1	12.5	12	11	30
SC16-10	10.2	5.5	7.1	15	12	11	30
SC16-12	12.2	5.5	7.1	16.5	12	11	30

SC 铜管端子
Copper Tube Terminals

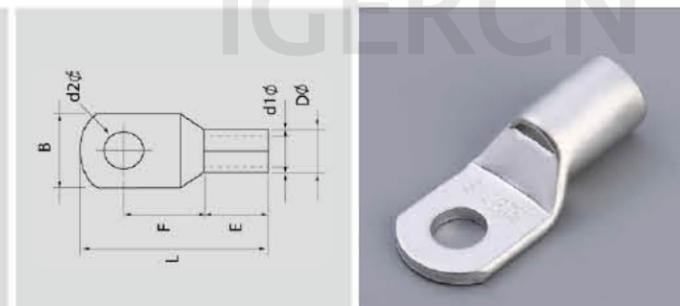


项目/Items	d2	d1	D	B	E	F	L
SC25-5	5.2	7	8.8	12.5	13	12	30
SC25-6	6.2	7	8.8	12.5	13	12	30
SC25-8	8.2	7	8.8	12.5	13	12	30
SC25-10	10.2	7	8.8	15	13	12	30
SC25-12	12.2	7	8.8	17	13	12	30
SC35-5	5.5	8.6	10.6	15	14	14	35
SC35-6	6.5	8.6	10.6	15	14	14	35
SC35-8	8.5	8.6	10.6	15	14	14	35
SC35-10	10.5	8.6	10.6	15	14	14	37
SC35-12	12.5	8.6	10.6	18.5	14	14	37
SC35-14	14.5	8.6	10.6	19	14	14	37
SC50-6	6.5	10	12.4	18	16	17	43
SC50-8	8.5	10	12.4	18	16	17	43
SC50-10	10.5	10	12.4	18	16	17	43
SC50-12	12.5	10	12.4	19	16	17	45
SC50-14	15	10	12.4	21	16	17	45
SC70-6	6.5	11.9	14.7	21	18	20	48
SC70-8	8.5	11.9	14.7	21	18	20	48
SC70-10	10.5	11.9	14.7	21	18	20	48
SC70-12	12.5	11.9	14.7	21	18	20	48
SC70-14	15	11.9	14.7	21	18	20	48
SC70-16	17	11.9	14.7	24	18	20	48
SC95-6	6.2	14.2	17.4	25.5	20	22	54
SC95-8	8.2	14.2	17.4	25.5	20	22	54
SC95-10	10.5	14.2	17.4	25.5	20	22	54
SC95-12	13	14.2	17.4	25.5	20	22	54
SC95-14	15	14.2	17.4	25.5	20	22	54
SC95-16	17	14.2	17.4	25.5	20	22	54

SC 铜管端子
Copper Tube Terminals

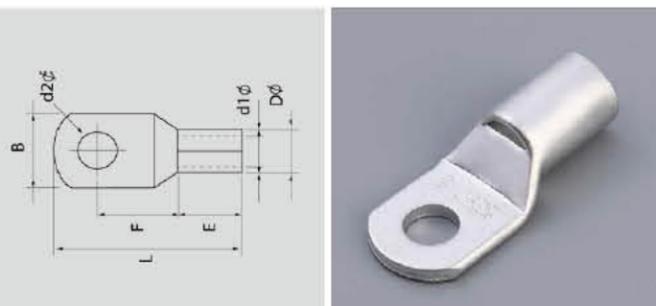


项目/Items	d2	d1	D	B	E	F	L
SC120-6	8.2	15.8	19.4	28	24	24	61
SC120-8	8.2	15.8	19.4	28	24	24	61
SC120-10	10.5	15.8	19.4	28	24	24	61
SC120-12	13	15.8	19.4	28	24	24	61
SC120-14	15	15.8	19.4	28	24	24	61
SC120-16	17	15.8	19.4	28	24	24	61
SC150-8	8.5	17.4	21.2	30.5	26	27	68
SC150-10	10.5	17.4	21.2	30.5	26	27	68
SC150-12	13	17.4	21.2	30.5	26	27	68
SC150-14	15	17.4	21.2	30.5	26	27	68
SC150-16	17	17.4	21.2	30.5	26	27	68
SC185-6	6.5	19.1	23.5	34	32	29	78
SC185-8	8.5	19.1	23.5	34	32	29	78
SC185-10	10.5	19.1	23.5	34	32	29	78
SC185-12	13	19.1	23.5	34	32	29	78
SC185-14	15	19.1	23.5	34	32	29	78
SC185-16	17	19.1	23.5	34	32	29	78
SC240-6	6.5	21.9	26.5	38.5	38	34	90
SC240-8	8.5	21.9	26.5	38.5	38	34	90
SC240-10	10.5	21.9	26.5	38.5	38	34	90
SC240-12	13	21.9	26.5	38.5	38	34	90
SC240-14	15	21.9	26.5	38.5	38	34	90
SC240-16	17	21.9	26.5	38.5	38	34	90
SC240-18	19	21.9	26.5	38.5	38	34	90
SC240-20	21	21.9	26.5	38.5	38	34	90
SC300-8	8.5	24.6	30	43.5	42	37	101
SC300-10	10.5	24.6	30	43.5	42	37	101
SC300-12	13	24.6	30	43.5	42	37	101
SC300-14	15	24.6	30	43.5	42	37	101

SC 铜管端子
Copper Tube Terminals

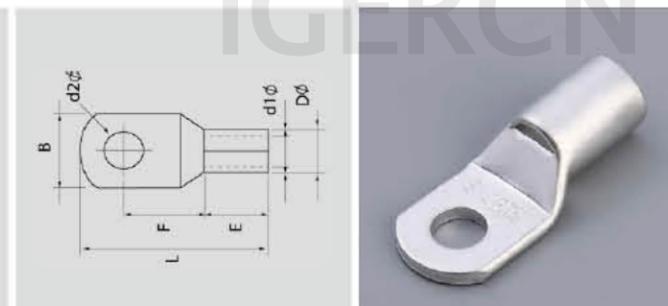


项目/Items	d2	d1	D	B	E	F	L
SC300-16	17	24.6	30	43.5	42	37	101
SC300-18	19	24.6	30	43.5	42	37	101
SC300-20	21	24.6	30	43.5	42	37	101
SC400-12	13	29.9	36.5	53	44	44	113
SC400-14	15	29.9	36.5	53	44	44	113
SC400-16	17	29.9	36.5	53	44	44	113
SC400-18	19	29.9	36.5	53	44	44	113
SC400-20	21	29.9	36.5	53	44	44	113
SC400-22	23	29.9	36.5	53	44	44	113
SC500-12	13	31.8	39	56	48	48	124
SC500-14	15	31.8	39	56	48	48	124
SC500-16	17	31.8	39	56	48	48	124
SC500-18	19	31.8	39	56	48	48	124
SC500-20	21	31.8	39	56	48	48	124
SC500-22	23	31.8	39	56	48	48	124
SC630-12	13	36	44	63.5	52	51	130
SC630-14	15	36	44	63.5	52	51	130
SC630-16	17	36	44	63.5	52	51	130
SC630-18	19	36	44	63.5	52	51	130
SC630-20	21	36	44	63.5	52	51	130
SC630-22	23	36	44	63.5	52	51	130
SC800-14	15	41.6	51.2	74	54	56	140
SC800-16	17	41.6	51.2	74	54	56	140
SC800-18	19	41.6	51.2	74	54	56	140
SC800-20	21	41.6	51.2	74	54	56	140
SC1000-14	15	46.6	56.6	81.5	60	56	146
SC1000-16	17	46.6	56.6	81.5	60	56	146
SC1000-18	19	46.6	56.6	81.5	60	56	146
SC1000-20	21	46.6	56.6	81.5	60	56	146
SC1000-22	23	46.6	56.6	81.5	60	56	146

T 铜管端子
Copper Tube Terminals

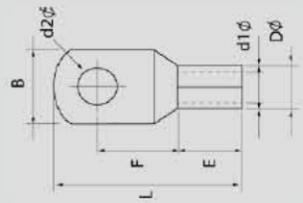


项目/Items	d2	d1	D	B	E	F	L
T1.5-3	3.2	2.2	3.7	8	7	7	20
T1.5-4	4.2	2.2	3.7	8	7	7	20
T1.5-5	5.2	2.2	3.7	10	7	7	20
T1.5-6	6.2	2.2	3.7	10	7	7	20
T2.5-3	3.2	2.4	3.9	8	7	7	20
T2.5-4	4.2	2.4	3.9	8	7	7	20
T2.5-5	5.2	2.4	3.9	10	7	7	20
T2.5-6	6.2	2.4	3.9	10	7	7	20
T2.5-8	8.2	2.4	3.9	12.5	7	7	20
T4-4	4.2	2.8	4.5	10	7	8	20
T4-5	5.2	2.8	4.5	10	7	8	20
T4-6	6.2	2.8	4.5	10	7	8	20
T4-8	8.2	2.8	4.5	12.5	7	8	20
T6-4	4.2	3.8	5.5	10	9	9	24
T6-5	5.2	3.8	5.5	10	9	9	24
T6-6	6.2	3.8	5.5	10	9	9	24
T6-8	8.2	3.8	5.5	12.5	9	9	27
T6-10	10.2	3.8	5.5	15	9	9	27
T10-4	4.2	4.5	6.2	10	9	10	25
T10-5	5.2	4.5	6.2	10	9	10	25
T10-6	6.2	4.5	6.2	10	9	10	25
T10-8	8.2	4.5	6.2	12.5	9	10	27
T10-10	10.2	4.5	6.2	15	9	10	27
T16-5	5.2	5.4	7.1	10	12	11	27
T16-6	6.2	5.4	7.1	10	12	11	27
T16-8	8.2	5.4	7.1	12.5	12	11	30
T16-10	10.2	5.4	7.1	15	12	11	30
T16-12	12.5	5.4	7.1	16.5	12	11	30

T 铜管端子
Copper Tube Terminals

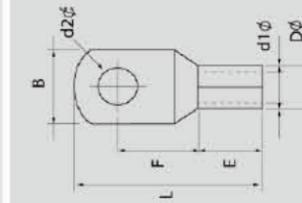


项目/Items	d2	d1	D	B	E	F	L
T25-5	5.2	6.8	8.8	12.5	13	12	30
T25-6	6.2	6.8	8.8	12.5	13	12	30
T25-8	8.2	6.8	8.8	12.5	13	12	30
T25-10	10.2	6.8	8.8	15	13	12	32
T25-12	12.5	6.8	8.8	17	13	12	34
T35-5	5.5	8.2	10.6	15	14	14	35
T35-6	6.5	8.2	10.6	15	14	14	35
T35-8	8.5	8.2	10.6	15	14	14	35
T35-10	10.5	8.2	10.6	15	14	14	37
T35-12	12.5	8.2	10.6	18.5	14	14	37
T35-14	14.5	8.2	10.6	19	14	14	37
T50-6	6.5	9.5	12.4	18	16	17	43
T50-8	8.5	9.5	12.4	18	16	17	43
T50-10	10.5	9.5	12.4	18	16	17	43
T50-12	12.5	9.5	12.4	19	16	17	43
T50-14	15	9.5	12.4	21	16	17	43
T70-6	6.5	11.2	14.7	21	18	20	48
T70-8	8.5	11.2	14.7	21	18	20	48
T70-10	11	11.2	14.7	21	18	20	48
T70-12	12.5	11.2	14.7	21	18	20	48
T70-14	15	11.2	14.7	21	18	20	48
T70-16	17	11.2	14.7	24	18	20	50
T95-6	6.5	13.5	17.4	25.5	20	22	54
T95-8	8.5	13.5	17.4	25.5	20	22	54
T95-10	10.5	13.5	17.4	25.5	20	22	54
T95-12	13	13.5	17.4	25.5	20	22	54
T95-14	15	13.5	17.4	25.5	20	22	54
T95-16	17	13.5	17.4	25.5	20	22	54

T 铜管端子
Copper Tube Terminals

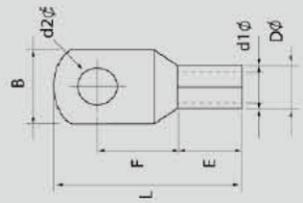

项目/Items	d2	d1	D	B	E	F	L
T120-6	6.5	15	19.4	28	24	24	61
T120-8	8.5	15	19.4	28	24	24	61
T120-10	10.5	15	19.4	28	24	24	61
T120-12	13	15	19.4	28	24	24	61
T120-14	15	15	19.4	28	24	24	61
T120-16	17	15	19.4	28	24	24	61
T150-6	6.5	16.5	21.2	30.5	26	27	68
T150-8	8.2	16.5	21.2	30.5	26	27	68
T150-10	10.5	16.5	21.2	30.5	26	27	68
T150-12	13	16.5	21.2	30.5	26	27	68
T150-14	15	16.5	21.2	30.5	26	27	68
T150-16	17	16.5	21.2	30.5	26	27	68
T185-6	6.5	18.5	23.5	34	32	29	78
T185-8	8.5	18.5	23.5	34	32	29	78
T185-10	10.5	18.5	23.5	34	32	29	78
T185-12	13	18.5	23.5	34	32	29	78
T185-14	15	18.5	23.5	34	32	29	78
T185-16	17	18.5	23.5	34	32	29	78
T240-6	6.2	21	26.5	38.5	38	34	90
T240-8	8.2	21	26.5	38.5	38	34	90
T240-10	10.5	21	26.5	38.5	38	34	90
T240-12	13	21	26.5	38.5	38	34	90
T240-14	15	21	26.5	38.5	38	34	90
T240-16	17	21	26.5	38.5	38	34	90
T240-18	19	21	26.5	38.5	38	34	90
T240-20	21	21	26.5	38.5	38	34	90
T300-8	8.5	23.5	30	43.5	42	37	101
T300-10	10.5	23.5	30	43.5	42	37	101
T300-12	13	23.5	30	43.5	42	37	101
T300-14	15	23.5	30	43.5	42	37	101


T 铜管端子
Copper Tube Terminals

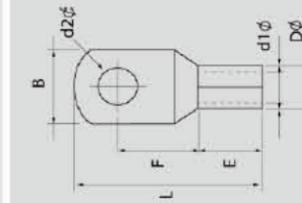

项目/Items	d2	d1	D	B	E	F	L
T300-16	17	23.5	30	43.5	42	37	101
T300-18	19	23.5	30	43.5	42	37	101
T300-20	21	23.5	30	43.5	42	37	101
T400-12	13	28.5	36.5	53	44	44	113
T400-14	15	28.5	36.5	53	44	44	113
T400-16	17	28.5	36.5	53	44	44	113
T400-18	19	28.5	36.5	53	44	44	113
T400-20	21	28.5	36.5	53	44	44	113
T400-22	23	28.5	36.5	53	44	44	113
T500-12	13	30	39	56	48	48	124
T500-14	15	30	39	56	48	48	124
T500-16	17	30	39	56	48	48	124
T500-18	19	30	39	56	48	48	124
T500-20	21	30	39	56	48	48	124
T500-22	23	30	39	56	48	48	124
T630-12	13	34.5	44	63.5	52	51	130
T630-14	15	34.5	44	63.5	52	51	130
T630-16	17	34.5	44	63.5	52	51	130
T630-18	19	34.5	44	63.5	52	51	130
T630-20	21	34.5	44	63.5	52	51	130
T630-22	23	34.5	44	63.5	52	51	130
T800-14	15	40	51.2	74	54	56	140
T800-16	17	40	51.2	74	54	56	140
T800-18	19	40	51.2	74	54	56	140
T800-20	21	40	51.2	74	54	56	140
T1000-14	15	44	56.6	81.5	60	56	146
T1000-16	17	44	56.6	81.5	60	56	146
T1000-18	19	44	56.6	81.5	60	56	146
T1000-20	21	44	56.6	81.5	60	56	146
T1000-22	23	44	56.5	81.5	60	56	146


铜管端子 / Terminal-lug

TL-NH 铜管端子
Copper Tube Terminals

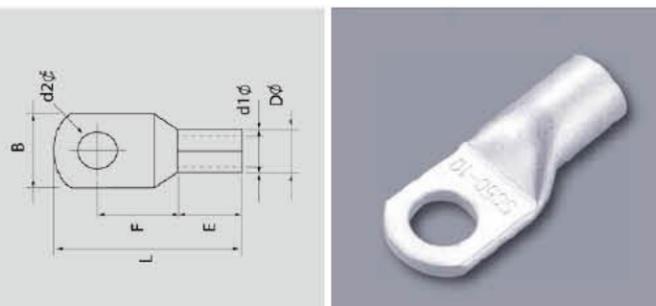


项目/Items	d2	d1	D	B	E	F	L
TL1.5-3NH	3.2	2.2	3.7	8	7	7	20
TL1.5-4NH	4.2	2.2	3.7	8	7	7	20
TL1.5-5NH	5.2	2.2	3.7	10	7	7	20
TL1.5-6NH	6.2	2.2	3.7	10	7	7	20
TL2.5-3NH	3.2	2.4	3.9	8	7	7	20
TL2.5-4NH	4.2	2.4	3.9	8	7	7	20
TL2.5-5NH	5.2	2.4	3.9	10	7	7	20
TL2.5-6NH	6.2	2.4	3.9	10	7	7	20
TL2.5-8NH	8.2	2.4	3.9	12.5	7	7	20
TL4-4NH	4.2	2.8	4.5	10	7	8	20
TL4-5NH	5.2	2.8	4.5	10	7	8	20
TL4-6NH	6.2	2.8	4.5	10	7	8	20
TL4-8NH	8.2	2.8	4.5	12.5	7	8	20
TL6-4NHH	4.2	3.8	5.5	10	9	9	24
TL6-5NH	5.2	3.8	5.5	10	9	9	24
TL6-6NH	6.2	3.8	5.5	10	9	9	24
TL6-8NH	8.2	3.8	5.5	12.5	9	9	27
TL6-10NH	10.2	3.8	5.5	15	9	9	27
TL10-4NH	4.2	4.5	6.2	10	9	10	25
TL10-5NH	5.2	4.5	6.2	10	9	10	25
TL10-6NH	6.2	4.5	6.2	10	9	10	25
TL10-8NH	8.2	4.5	6.2	12.5	9	10	27
TL10-10NH	10.2	4.5	6.2	15	9	10	27
TL16-5NH	5.2	5.4	7.1	10	12	11	27
TL16-6NH	6.2	5.4	7.1	10	12	11	27
TL16-8NH	8.2	5.4	7.1	12.5	12	11	30
TL16-10NH	10.2	5.4	7.1	15	12	11	30
TL16-12NH	12.5	5.4	7.1	16.5	12	11	30

TL-NH 铜管端子
Copper Tube Terminals

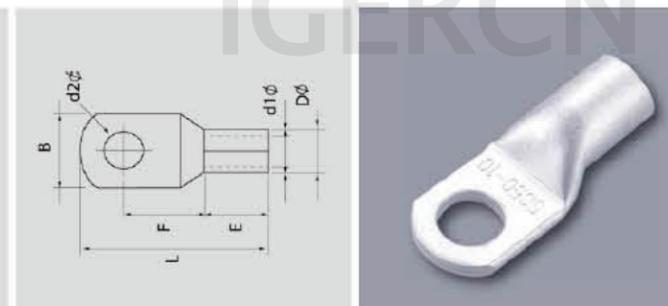


项目/Items	d2	d1	D	B	E	F	L
TL25-5NH	5.2	6.8	8.8	12.5	13	12	30
TL25-6NH	6.2	6.8	8.8	12.5	13	12	30
TL25-8NH	8.2	6.8	8.8	12.5	13	12	30
TL25-10NH	10.2	6.8	8.8	15	13	12	32
TL25-12NH	12.5	6.8	8.8	17	13	12	34
TL35-5NH	5.5	8.2	10.6	15	14	14	35
TL35-6NH	6.5	8.2	10.6	15	14	14	35
TL35-8NH	8.5	8.2	10.6	15	14	14	35
TL35-10NH	10.5	8.2	10.6	15	14	14	37
TL35-12NH	12.5	8.2	10.6	18.5	14	14	37
TL35-14NH	14.5	8.2	10.6	19	14	14	37
TL50-6NH	6.5	9.5	12.4	18	16	17	43
TL50-8NH	8.5	9.5	12.4	18	16	17	43
TL50-10NH	10.5	9.5	12.4	18	16	17	43
TL50-12NH	12.5	9.5	12.4	19	16	17	43
TL50-14NH	15	9.5	12.4	21	16	17	43
TL70-6NH	6.5	11.2	14.7	21	18	20	48
TL70-8NH	8.5	11.2	14.7	21	18	20	48
TL70-10NH	11	11.2	14.7	21	18	20	48
TL70-12NH	12.5	11.2	14.7	21	18	20	48
TL70-14NH	15	11.2	14.7	21	18	20	48
TL70-16NH	17	11.2	14.7	24	18	20	50
TL95-6NH	6.5	13.5	17.4	25.5	20	22	54
TL95-8NH	8.5	13.5	17.4	25.5	20	22	54
TL95-10NH	10.5	13.5	17.4	25.5	20	22	54
TL95-12NH	13	13.5	17.4	25.5	20	22	54
TL95-14NH	15	13.5	17.4	25.5	20	22	54
TL95-16NH	17	13.5	17.4	25.5	20	22	54

TL-NH 铜管端子
Copper Tube Terminals

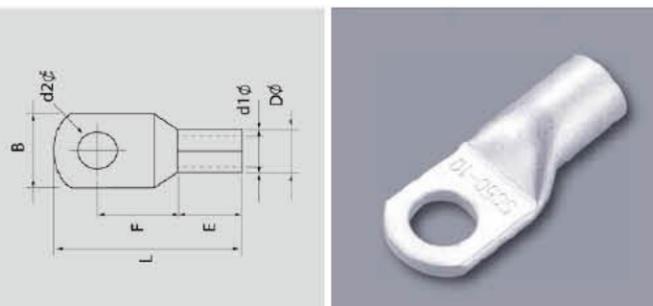


项目/Items	d2	d1	D	B	E	F	L
TL120-6NH	6.5	15	19.4	28	24	24	61
TL120-8NH	8.5	15	19.4	28	24	24	61
TL120-10NH	10.5	15	19.4	28	24	24	61
TL120-12NH	13	15	19.4	28	24	24	61
TL120-14NH	15	15	19.4	28	24	24	61
TL120-16NH	17	15	19.4	28	24	24	61
TL150-6NH	6.5	16.5	21.2	30.5	26	27	68
TL150-8NH	8.2	16.5	21.2	30.5	26	27	68
TL150-10NH	10.5	16.5	21.2	30.5	26	27	68
TL150-12NH	13	16.5	21.2	30.5	26	27	68
TL150-14NH	15	16.5	21.2	30.5	26	27	68
TL150-16NH	17	16.5	21.2	30.5	26	27	68
TL185-6NH	6.5	18.5	23.5	34	32	29	78
TL185-8NH	8.5	18.5	23.5	34	32	29	78
TL185-10NH	10.5	18.5	23.5	34	32	29	78
TL185-12NH	13	18.5	23.5	34	32	29	78
TL185-14NH	15	18.5	23.5	34	32	29	78
TL185-16NH	17	18.5	23.5	34	32	29	78
TL240-6NH	6.2	21	26.5	38.5	38	34	90
TL240-8NH	8.2	21	26.5	38.5	38	34	90
TL240-10NH	10.5	21	26.5	38.5	38	34	90
TL240-12NH	13	21	26.5	38.5	38	34	90
TL240-14NH	15	21	26.5	38.5	38	34	90
TL240-16NH	17	21	26.5	38.5	38	34	90
TL240-18NH	19	21	26.5	38.5	38	34	90
TL240-20NH	21	21	26.5	38.5	38	34	90
TL300-8NH	8.5	23.5	30	43.5	42	37	101
TL300-10NH	10.5	23.5	30	43.5	42	37	101
TL300-12NH	13	23.5	30	43.5	42	37	101
TL300-14NH	15	23.5	30	43.5	42	37	101

TL-NH 铜管端子
Copper Tube Terminals

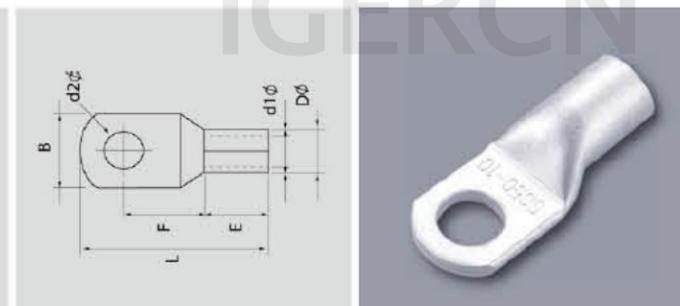


项目/Items	d2	d1	D	B	E	F	L
TL300-16NH	17	23.5	30	43.5	42	37	101
TL300-18NH	19	23.5	30	43.5	42	37	101
TL300-20NH	21	23.5	30	43.5	42	37	101
TL400-12NH	13	28.5	36.5	53	44	44	113
TL400-14NH	15	28.5	36.5	53	44	44	113
TL400-16NH	17	28.5	36.5	53	44	44	113
TL400-18NH	19	28.5	36.5	53	44	44	113
TL400-20NH	21	28.5	36.5	53	44	44	113
TL400-22NH	23	28.5	36.5	53	44	44	113
TL500-12NH	13	30	39	56	48	48	124
TL500-14NH	15	30	39	56	48	48	124
TL500-16NH	17	30	39	56	48	48	124
TL500-18NH	19	30	39	56	48	48	124
TL500-20NH	21	30	39	56	48	48	124
TL500-22NH	23	30	39	56	48	48	124
TL630-12NH	13	34.5	44	63.5	52	51	130
TL630-14NH	15	34.5	44	63.5	52	51	130
TL630-16NH	17	34.5	44	63.5	52	51	130
TL630-18NH	19	34.5	44	63.5	52	51	130
TL630-20NH	21	34.5	44	63.5	52	51	130
TL630-22NH	23	34.5	44	63.5	52	51	130
TL800-14NH	15	40	51.2	74	54	56	140
TL800-16NH	17	40	51.2	74	54	56	140
TL800-18NH	19	40	51.2	74	54	56	140
TL800-20NH	21	40	51.2	74	54	56	140
TL1000-14NH	15	44	56.6	81.5	60	56	146
TL1000-16NH	17	44	56.6	81.5	60	56	146
TL1000-18NH	19	44	56.6	81.5	60	56	146
TL1000-20NH	21	44	56.6	81.5	60	56	146
TL1000-22NH	23	44	56.5	81.5	60	56	146

SC-NH 铜管端子
Copper Tube Terminals

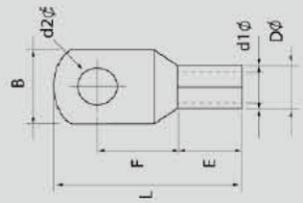


项目/Items	d2	d1	D	B	E	F	L
SC1.5-3NH	3.2	2.2	3.7	8	7	7	20
SC1.5-4NH	4.2	2.2	3.7	8	7	7	20
SC1.5-5NH	5.2	2.2	3.7	10	7	7	20
SC1.5-6NH	6.2	2.2	3.7	10	7	7	20
SC2.5-3NH	3.2	2.4	3.9	8	7	7	20
SC2.5-4NH	4.2	2.4	3.9	8	7	7	20
SC2.5-5NH	5.2	2.4	3.9	10	7	7	20
SC2.5-6NH	6.2	2.4	3.9	10	7	7	20
SC2.5-8NH	8.2	2.4	3.9	12.5	7	7	20
SC4-4NH	4.2	2.8	4.5	10	7	8	20
SC4-5NH	5.2	2.8	4.5	10	7	8	20
SC4-6NH	6.2	2.8	4.5	10	7	8	20
SC4-8NH	8.2	2.8	4.5	12.5	7	8	20
SC6-4NH	4.2	4.1	5.5	10	9	9	24
SC6-5NH	5.2	4.1	5.5	10	9	9	24
SC6-6NH	6.2	4.1	5.5	10	9	9	24
SC6-8NH	8.2	4.1	5.5	12	9	9	27
SC6-10NH	10.2	4.1	5.5	15	9	9	27
SC10-4NH	4.2	4.6	6.2	10	9	10	25
SC10-5NH	5.2	4.6	6.2	10	9	10	25
SC10-6NH	6.2	4.6	6.2	10	9	10	25
SC10-8NH	8.2	4.6	6.2	12.5	9	10	27
SC10-10NH	10.2	4.6	6.2	15	9	10	27
SC16-5NH	5.2	5.5	7.1	10	12	11	27
SC16-6NH	6.2	5.5	7.1	10	12	11	27
SC16-8NH	8.2	5.5	7.1	12.5	12	11	30
SC16-10NH	10.2	5.5	7.1	15	12	11	30
SC16-12NH	12.2	5.5	7.1	16.5	12	11	30

SC-NH 铜管端子
Copper Tube Terminals

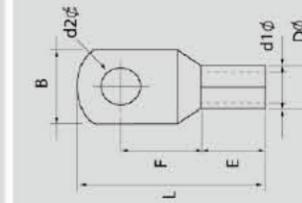


项目/Items	d2	d1	D	B	E	F	L
SC25-5NH	5.2	7	8.8	12.5	13	12	30
SC25-6NH	6.2	7	8.8	12.5	13	12	30
SC25-8NH	8.2	7	8.8	12.5	13	12	30
SC25-10NH	10.2	7	8.8	15	13	12	30
SC25-12NH	12.2	7	8.8	17	13	12	30
SC35-5NH	5.5	8.6	10.6	15	14	14	35
SC35-6NH	6.5	8.6	10.6	15	14	14	35
SC35-8NH	8.5	8.6	10.6	15	14	14	35
SC35-10NH	10.5	8.6	10.6	15	14	14	37
SC35-12NH	12.5	8.6	10.6	18.5	14	14	37
SC35-14NH	14.5	8.6	10.6	19	14	14	37
SC50-6NH	6.5	10	12.4	18	16	17	43
SC50-8NH	8.5	10	12.4	18	16	17	43
SC50-10NH	10.5	10	12.4	18	16	17	43
SC50-12NH	12.5	10	12.4	19	16	17	43
SC50-14NH	15	10	12.4	21	16	17	43
SC70-6NH	6.5	11.9	14.7	21	18	20	48
SC70-8NH	8.5	11.9	14.7	21	18	20	48
SC70-10NH	10.5	11.9	14.7	21	18	20	48
SC70-12NH	12.5	11.9	14.7	21	18	20	48
SC70-14NH	15	11.9	14.7	21	18	20	48
SC70-16NH	17	11.9	14.7	24	18	20	48
SC95-6NH	6.2	14.2	17.4	25.5	20	22	54
SC95-8NH	8.2	14.2	17.4	25.5	20	22	54
SC95-10NH	10.5	14.2	17.4	25.5	20	22	54
SC95-12NH	13	14.2	17.4	25.5	20	22	54
SC95-14NH	15	14.2	17.4	25.5	20	22	54
SC95-16NH	17	14.2	17.4	25.5	20	22	54

SC-NH 铜管端子
Copper Tube Terminals

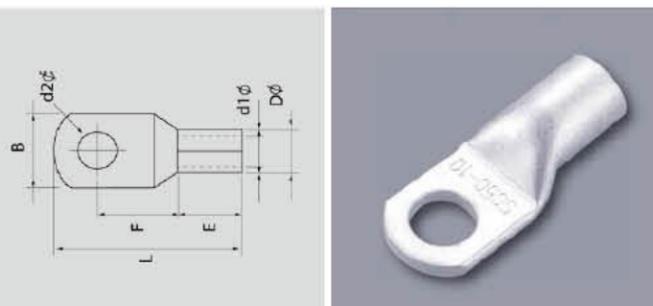

项目/Items	d2	d1	D	B	E	F	L
SC120-6NH	8.2	15.8	19.4	28	24	24	61
SC120-8NH	8.2	15.8	19.4	28	24	24	61
SC120-10NH	10.5	15.8	19.4	28	24	24	61
SC120-12NH	13	15.8	19.4	28	24	24	61
SC120-14NH	15	15.8	19.4	28	24	24	61
SC120-16NH	17	15.8	19.4	28	24	24	61
SC150-8NH	8.5	17.4	21.2	30.5	26	27	68
SC150-10NH	10.5	17.4	21.2	30.5	26	27	68
SC150-12NH	13	17.4	21.2	30.5	26	27	68
SC150-14NH	15	17.4	21.2	30.5	26	27	68
SC150-16NH	17	17.4	21.2	30.5	26	27	68
SC185-6NH	6.5	19.1	23.5	34	32	29	78
SC185-8NH	8.5	19.1	23.5	34	32	29	78
SC185-10NH	10.5	19.1	23.5	34	32	29	78
SC185-12NH	13	19.1	23.5	34	32	29	78
SC185-14NH	15	19.1	23.5	34	32	29	78
SC185-16NH	17	19.1	23.5	34	32	29	78
SC240-6NH	6.5	21.9	26.5	38.5	38	34	90
SC240-8NH	8.5	21.9	26.5	38.5	38	34	90
SC240-10NH	10.5	21.9	26.5	38.5	38	34	90
SC240-12NH	13	21.9	26.5	38.5	38	34	90
SC240-14NH	15	21.9	26.5	38.5	38	34	90
SC240-16NH	17	21.9	26.5	38.5	38	34	90
SC240-18NH	19	21.9	26.5	38.5	38	34	90
SC240-20NH	21	21.9	26.5	38.5	38	34	90
SC300-8NH	8.5	24.6	30	43.5	42	37	101
SC300-10NH	10.5	24.6	30	43.5	42	37	101
SC300-12NH	13	24.6	30	43.5	42	37	101
SC300-14NH	15	24.6	30	43.5	42	37	101

SC-NH 铜管端子
Copper Tube Terminals

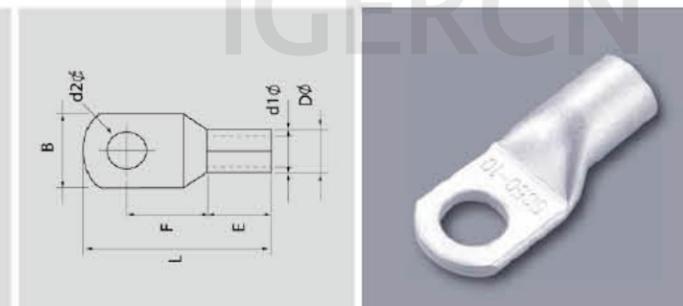


项目/Items	d2	d1	D	B	E	F	L
SC300-16NH	17	24.6	30	43.5	42	37	101
SC300-18NH	19	24.6	30	43.5	42	37	101
SC300-20NH	21	24.6	30	43.5	42	37	101
SC400-12NH	13	29.9	36.5	53	44	44	113
SC400-14NH	15	29.9	36.5	53	44	44	113
SC400-16NH	17	29.9	36.5	53	44	44	113
SC400-18NH	19	29.9	36.5	53	44	44	113
SC400-20NH	21	29.9	36.5	53	44	44	113
SC400-22NH	23	29.9	36.5	53	44	44	113
SC500-12NH	13	31.8	39	56	48	48	124
SC500-14NH	15	31.8	39	56	48	48	124
SC500-16NH	17	31.8	39	56	48	48	124
SC500-18NH	19	31.8	39	56	48	48	124
SC500-20NH	21	31.8	39	56	48	48	124
SC500-22NH	23	31.8	39	56	48	48	124
SC630-12NH	13	36	44	63.5	52	51	130
SC630-14NH	15	36	44	63.5	52	51	130
SC630-16NH	17	36	44	63.5	52	51	130
SC630-18NH	19	36	44	63.5	52	51	130
SC630-20NH	21	36	44	63.5	52	51	130
SC630-22NH	23	36	44	63.5	52	51	130
SC800-14NH	15	41.6	51.2	74	54	56	140
SC800-16NH	17	41.6	51.2	74	54	56	140
SC800-18NH	19	41.6	51.2	74	54	56	140
SC800-20NH	21	41.6	51.2	74	54	56	140
SC1000-14NH	15	46.6	56.6	81.5	60	56	146
SC1000-16NH	17	46.6	56.6	81.5	60	56	146
SC1000-18NH	19	46.6	56.6	81.5	60	56	146
SC1000-20NH	21	46.6	56.6	81.5	60	56	146
SC1000-22NH	23	46.6	56.6	81.5	60	56	146

LCL 铜管端子 Copper Tube Terminals

Has provide mechanical strength for heavy duty applications.
Suitable use with cable size from 10-500 SQ.MM.12-35KV.

Material: Copper tube Cu 99% up
Surface: Tin plated

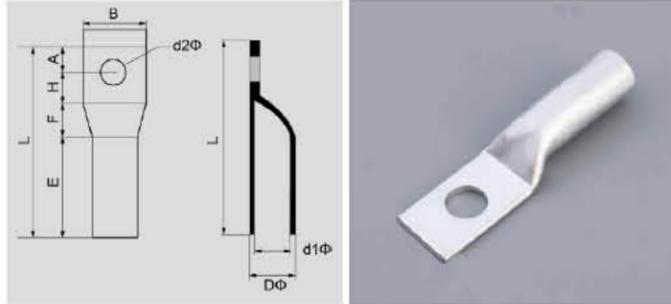


项目/Items	d2	d1	D	A	B	E	F	H	L
LCL10-6	6.2	4.5	6.2	7.5	12.0	21.5	7.4	9.5	45.9
LCL10-8	8.2	4.5	6.2	7.5	12.0	21.5	7.4	9.5	45.9
LCL10-10	10.2	4.5	6.2	7.5	14.0	21.5	7.4	9.5	45.9
LCL16-6	6.2	5.4	7.1	8.0	12.0	25.0	7.4	10.0	50.4
LCL16-8	8.2	5.4	7.1	8.0	12.0	25.0	7.4	10.0	50.4
LCL16-10	10.2	5.4	7.1	8.0	14.0	25.0	7.4	10.0	50.4
LCL16-12	12.5	5.4	7.1	8.0	16.5	25.0	7.4	10.0	50.4
LCL25-6	6.2	6.8	8.8	8.5	15.0	28.5	7.4	10.5	54.9
LCL25-8	8.2	6.8	8.8	8.5	15.0	28.5	7.4	10.5	54.9
LCL25-10	10.2	6.8	8.8	8.5	15.0	28.5	7.4	10.5	54.9
LCL25-12	12.2	6.8	8.8	8.5	16.5	28.5	7.4	10.5	54.9
LCL35-6	6.5	8.2	10.6	9.0	17.0	32.0	8.0	11.0	60.0
LCL35-8	8.5	8.2	10.6	9.0	17.0	32.0	8.0	11.0	60.0
LCL35-10	10.5	8.2	10.6	9.0	17.0	32.0	8.0	11.0	60.0
LCL35-12	12.5	8.2	10.6	9.0	17.0	32.0	8.0	11.0	60.0
LCL50-8	8.5	9.5	12.4	12.7	19.0	35.0	10.9	14.7	73.3
LCL50-10	10.5	9.5	12.4	12.7	19.0	35.0	10.9	14.7	73.3
LCL50-12	13.0	9.5	12.4	12.7	19.0	35.0	10.9	14.7	73.3
LCL50-14	15.0	9.5	12.4	12.7	21.0	35.0	10.9	14.7	73.3
LCL50-16	17.0	9.5	12.4	12.7	23.0	35.0	10.9	14.7	73.3
LCL70-8	8.5	11.2	14.7	13.9	21.0	35.0	10.9	17.9	77.7
LCL70-10	10.5	11.2	14.7	13.9	21.0	35.0	10.9	17.9	77.7
LCL70-12	13.0	11.2	14.7	13.9	21.0	35.0	10.9	17.9	77.7
LCL70-14	15.0	11.2	14.7	13.9	21.0	35.0	10.9	17.9	77.7
LCL70-16	17.0	11.2	14.7	13.9	24.0	35.0	10.9	17.9	77.7
LCL95-8	8.5	13.5	17.4	13.9	25.5	38.0	15.8	17.9	85.6
LCL95-10	10.5	13.5	17.4	13.9	25.5	38.0	15.8	17.9	85.6
LCL95-12	13.0	13.5	17.4	13.9	25.5	38.0	15.8	17.9	85.6

LCL 铜管端子 Copper Tube Terminals

Has provide mechanical strength for heavy duty applications.
Suitable use with cable size from 10-500 SQ.MM.12-35KV.

Material: Copper tube Cu 99% up
Surface: Tin plated

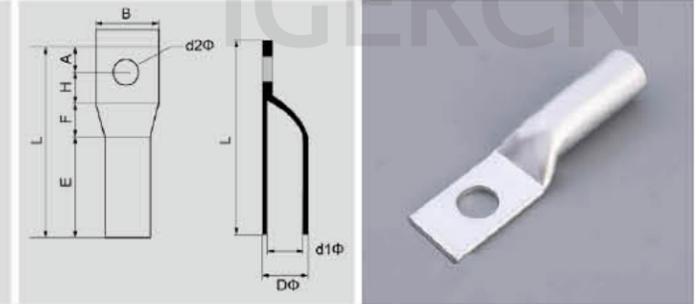


项目/Items	d2	d1	D	A	B	E	F	H	L
LCL95-14	15.0	13.5	17.4	13.9	25.5	38.0	15.8	17.9	85.6
LCL95-16	17.0	13.5	17.4	13.9	25.5	38.0	15.8	17.9	85.6
LCL120-8	8.5	15.0	19.4	13.9	28.0	40.0	18.8	17.9	90.6
LCL120-10	10.5	15.0	19.4	13.9	28.0	40.0	18.8	17.9	90.6
LCL120-12	13.0	15.0	19.4	13.9	28.0	40.0	18.8	17.9	90.6
LCL120-14	15.0	15.0	19.4	13.9	28.0	40.0	18.8	17.9	90.6
LCL120-16	17.0	15.0	19.4	13.9	28.0	40.0	18.8	17.9	90.6
LCL150-10	10.5	16.5	21.2	13.9	30.5	50.0	19.8	17.9	101.6
LCL150-12	13.0	16.5	21.2	13.9	30.5	50.0	19.8	17.9	101.6
LCL150-14	15.0	16.5	21.2	13.9	30.5	50.0	19.8	17.9	101.6
LCL150-16	17.0	16.5	21.2	13.9	30.5	50.0	19.8	17.9	101.6
LCL185-12	13.0	18.5	23.5	13.9	34.0	50.0	19.8	17.9	101.6
LCL185-14	15.0	18.5	23.5	13.9	34.0	50.0	19.8	17.9	101.6
LCL185-16	17.0	18.5	23.5	13.9	34.0	50.0	19.8	17.9	101.6
LCL185-18	19.0	18.5	23.5	13.9	34.0	50.0	19.8	17.9	101.6
LCL185-20	21.0	18.5	23.5	13.9	34.0	50.0	19.8	17.9	101.6
LCL240-12	13.0	21.0	26.5	15.9	38.5	56.0	24.8	19.9	116.6
LCL240-14	15.0	21.0	26.5	15.9	38.5	56.0	24.8	19.9	116.6
LCL240-16	17.0	21.0	26.5	15.9	38.5	56.0	24.8	19.9	116.6
LCL240-18	19.0	21.0	26.5	15.9	38.5	56.0	24.8	19.9	116.6
LCL240-20	21.0	21.0	26.5	15.9	38.5	56.0	24.8	19.9	116.6
LCL300-12	13.0	23.5	30.0	20.0	43.0	67.0	26.8	24.0	137.8
LCL300-14	15.0	23.5	30.0	20.0	43.0	67.0	26.8	24.0	137.8
LCL300-16	17.0	23.5	30.0	20.0	43.0	67.0	26.8	24.0	137.8
LCL300-18	19.0	23.5	30.0	20.0	43.0	67.0	26.8	24.0	137.8
LCL300-20	21.0	23.5	30.0	20.0	43.0	67.0	26.8	24.0	137.8

LCL 铜管端子 Copper Tube Terminals

Has provide mechanical strength for heavy duty applications.
Suitable use with cable size from 10-500 SQ.MM.12-35KV.

Material: Copper tube Cu 99% up
Surface: Tin plated

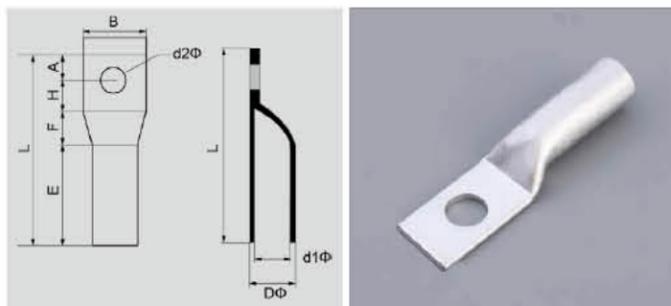


项目/Items	d2	d1	D	A	B	E	F	H	L
LCL400-12	13.0	28.5	36.5	23.0	53.0	67.0	26.8	27.0	143.8
LCL400-14	15.0	28.5	36.5	23.0	53.0	67.0	26.8	27.0	143.8
LCL400-16	17.0	28.5	36.5	23.0	53.0	67.0	26.8	27.0	143.8
LCL400-18	19.0	28.5	36.5	23.0	53.0	67.0	26.8	27.0	143.8
LCL400-20	21.0	28.5	36.5	23.0	53.0	67.0	26.8	27.0	143.8
LCL400-22	23.0	28.5	36.5	23.0	53.0	67.0	26.8	27.0	143.8
LCL500-12	13.0	30.0	39.0	23.0	56.0	75.0	33.8	27.0	158.8
LCL500-14	15.0	30.0	39.0	23.0	56.0	75.0	33.8	27.0	158.8
LCL500-16	17.0	30.0	39.0	23.0	56.0	75.0	33.8	27.0	158.8
LCL500-18	19.0	30.0	39.0	23.0	56.0	75.0	33.8	27.0	158.8
LCL500-20	21.0	30.0	39.0	23.0	56.0	75.0	33.8	27.0	158.8
LCL500-22	23.0	30.0	39.0	23.0	56.0	75.0	33.8	27.0	158.8
LCL630-12	13.0	34.5	44.0	26.0	63.5	80.0	37.8	30.0	173.8
LCL630-14	15.0	34.5	44.0	26.0	63.5	80.0	37.8	30.0	173.8
LCL630-16	17.0	34.5	44.0	26.0	63.5	80.0	37.8	30.0	173.8
LCL630-18	19.0	34.5	44.0	26.0	63.5	80.0	37.8	30.0	173.8
LCL630-20	21.0	34.5	44.0	26.0	63.5	80.0	37.8	30.0	173.8
LCL630-22	23.0	34.5	44.0	26.0	63.5	80.0	37.8	30.0	173.8
LCL800-14	15.0	40.0	51.2	29.0	74.0	85.0	41.8	33.0	188.8
LCL800-16	17.0	40.0	51.2	29.0	74.0	85.0	41.8	33.0	188.8
LCL800-18	19.0	40.0	51.2	29.0	74.0	85.0	41.8	33.0	188.8
LCL800-20	21.0	40.0	51.2	29.0	74.0	85.0	41.8	33.0	188.8
LCL1000-14	15.0	44.0	56.6	31.0	81.5	90.0	45.0	36.0	202.0
LCL1000-16	17.0	44.0	56.6	31.0	81.5	90.0	45.0	36.0	202.0
LCL1000-18	19.0	44.0	56.6	31.0	81.5	90.0	45.0	36.0	202.0
LCL1000-20	21.0	44.0	56.6	31.0	81.5	90.0	45.0	36.0	202.0

SCL 铜管端子 Copper Tube Terminals

Has provide mechanical strength for heavy duty applications.
Suitable use with cable size from 10-500 SQ.MM.12-35KV.

Material: Copper tube Cu 99% up
Surface: Tin plated

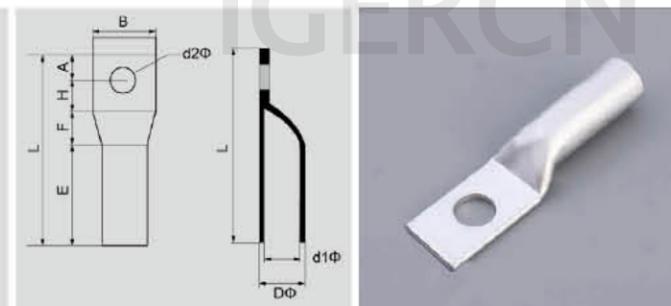


项目/Items	d2	d1	D	A	B	E	F	H	L
SCL10-6	6.2	4.6	6.2	7.5	12.0	21.5	7.4	9.5	45.9
SCL10-8	8.2	4.6	6.2	7.5	12.0	21.5	7.4	9.5	45.9
SCL10-10	10.2	4.6	6.2	7.5	14.0	21.5	7.4	9.5	45.9
SCL16-6	6.2	5.5	7.1	8.0	12.0	25.0	7.4	10.0	50.4
SCL16-8	8.2	5.5	7.1	8.0	12.0	25.0	7.4	10.0	50.4
SCL16-10	10.2	5.5	7.1	8.0	14.0	25.0	7.4	10.0	50.4
SCL16-12	12.5	5.5	7.1	8.0	16.5	25.0	7.4	10.0	50.4
SCL25-6	6.2	7.0	8.8	8.5	15.0	28.5	7.4	10.5	54.9
SCL25-8	8.2	7.0	8.8	8.5	15.0	28.5	7.4	10.5	54.9
SCL25-10	10.2	7.0	8.8	8.5	15.0	28.5	7.4	10.5	54.9
SCL25-12	12.5	7.0	8.8	8.5	16.5	28.5	7.4	10.5	54.9
SCL35-6	6.5	8.6	10.6	9.0	17.0	32.0	8.0	11.0	60.0
SCL35-8	8.5	8.6	10.6	9.0	17.0	32.0	8.0	11.0	60.0
SCL35-10	10.5	8.6	10.6	9.0	17.0	32.0	8.0	11.0	60.0
SCL35-12	12.5	8.6	10.6	9.0	17.0	32.0	8.0	11.0	60.0
SCL50-8	8.5	10.0	12.4	12.7	19.0	35.0	10.9	14.7	73.3
SCL50-10	10.5	10.0	12.4	12.7	19.0	35.0	10.9	14.7	73.3
SCL50-12	12.5	10.0	12.4	12.7	19.0	35.0	10.9	14.7	73.3
SCL50-14	15.0	10.0	12.4	12.7	21.0	35.0	10.9	14.7	73.3
SCL50-16	17.0	10.0	12.4	12.7	23.0	35.0	10.9	14.7	73.3
SCL70-8	8.5	11.9	14.7	13.9	21.0	35.0	10.9	17.9	77.7
SCL70-10	10.5	11.9	14.7	13.9	21.0	35.0	10.9	17.9	77.7
SCL70-12	12.5	11.9	14.7	13.9	21.0	35.0	10.9	17.9	77.7
SCL70-14	15.0	11.9	14.7	13.9	21.0	35.0	10.9	17.9	77.7
SCL70-16	17.0	11.9	14.7	13.9	24.0	35.0	10.9	17.9	77.7
SCL95-8	8.5	14.2	17.4	13.9	25.5	38.0	15.8	17.9	85.6



SCL 铜管端子 Copper Tube Terminals

Has provide machanical strength for heavy duty applications.
Suitable use with cable size from 10-500 SQ.MM.12-35KV.

Material: Copper tube Cu 99% up
Surface: Tin plated

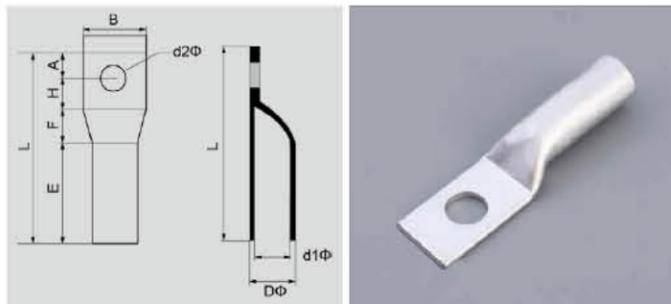


项目/Items	d2	d1	D	A	B	E	F	H	L
SCL95-10	10.5	14.2	17.4	13.9	25.5	38.0	15.8	17.9	85.6
SCL95-12	13.0	14.2	17.4	13.9	25.5	38.0	15.8	17.9	85.6
SCL95-14	15.0	14.2	17.4	13.9	25.5	38.0	15.8	17.9	85.6
SCL95-16	17.0	14.2	17.4	13.9	25.5	38.0	15.8	17.9	85.6
SCL120-8	8.5	15.8	19.4	13.9	28.0	40.0	18.8	17.9	90.6
SCL120-10	10.5	15.8	19.4	13.9	28.0	40.0	18.8	17.9	90.6
SCL120-12	13.0	15.8	19.4	13.9	28.0	40.0	18.8	17.9	90.6
SCL120-14	15.0	15.8	19.4	13.9	28.0	40.0	18.8	17.9	90.6
SCL120-16	17.0	15.8	19.4	13.9	28.0	40.0	18.8	17.9	90.6
SCL150-10	10.5	17.4	21.2	13.9	30.5	50.0	19.8	17.9	101.6
SCL150-12	13.0	17.4	21.2	13.9	30.5	50.0	19.8	17.9	101.6
SCL150-14	15.0	17.4	21.2	13.9	30.5	50.0	19.8	17.9	101.6
SCL150-16	17.0	17.4	21.2	13.9	30.5	50.0	19.8	17.9	101.6
SCL185-12	13.0	19.1	23.5	13.9	34.0	50.0	19.8	17.9	101.6
SCL185-14	15.0	19.1	23.5	13.9	34.0	50.0	19.8	17.9	101.6
SCL185-16	17.0	19.1	23.5	13.9	34.0	50.0	19.8	17.9	101.6
SCL185-18	19.0	19.1	23.5	13.9	34.0	50.0	19.8	17.9	101.6
SCL185-20	21.0	19.1	23.5	13.9	34.0	50.0	19.8	17.9	101.6
SCL240-12	13.0	21.9	26.5	15.9	38.5	56.0	24.8	19.9	116.6
SCL240-14	15.0	21.9	26.5	15.9	38.5	56.0	24.8	19.9	116.6
SCL240-16	17.0	21.9	26.5	15.9	38.5	56.0	24.8	19.9	116.6
SCL240-18	19.0	21.9	26.5	15.9	38.5	56.0	24.8	19.9	116.6
SCL240-20	21.0	21.9	26.5	15.9	38.5	56.0	24.8	19.9	116.6
SCL300-12	13.0	24.6	30.0	20.0	43.0	67.0	26.8	24.0	137.8
SCL300-14	15.0	24.6	30.0	20.0	43.0	67.0	26.8	24.0	137.8
SCL300-16	17.0	24.6	30.0	20.0	43.0	67.0	26.8	24.0	137.8

SCL 铜管端子 Copper Tube Terminals

Has provide machanical strength for heavy duty applications.
Suitable use with cable size from 10-500 SQ.MM.12-35KV.

Material: Copper tube Cu 99% up
Surface: Tin plated

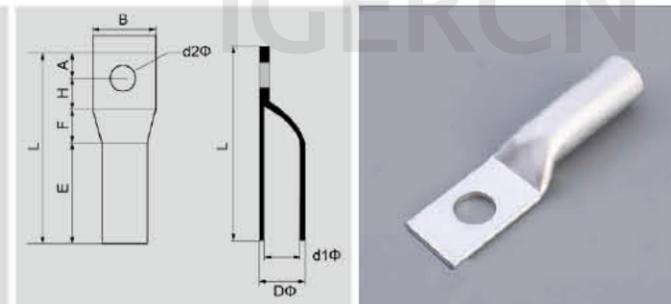


项目/Items	d2	d1	D	A	B	E	F	H	L
SCL300-18	19.0	24.6	30.0	20.0	43.0	67.0	26.8	24.0	137.8
SCL300-20	21.0	24.6	30.0	20.0	43.0	67.0	26.8	24.0	137.8
SCL400-12	13.0	29.9	36.5	23.0	53.0	67.0	26.8	27.0	143.8
SCL400-14	15.0	29.9	36.5	23.0	53.0	67.0	26.8	27.0	143.8
SCL400-16	17.0	29.9	36.5	23.0	53.0	67.0	26.8	27.0	143.8
SCL400-18	19.0	29.9	36.5	23.0	53.0	67.0	26.8	27.0	143.8
SCL400-20	21.0	29.9	36.5	23.0	53.0	67.0	26.8	27.0	143.8
SCL400-22	23.0	29.9	36.5	23.0	53.0	67.0	26.8	27.0	143.8
SCL500-12	13.0	31.8	39.0	23.0	56.0	75.0	33.8	27.0	158.8
SCL500-14	15.0	31.8	39.0	23.0	56.0	75.0	33.8	27.0	158.8
SCL500-16	17.0	31.8	39.0	23.0	56.0	75.0	33.8	27.0	158.8
SCL500-18	19.0	31.8	39.0	23.0	56.0	75.0	33.8	27.0	158.8
SCL500-20	21.0	31.8	39.0	23.0	56.0	75.0	33.8	27.0	158.8
SCL500-22	23.0	31.8	39.0	23.0	56.0	75.0	33.8	27.0	158.8
SCL630-12	13.0	36.0	44.0	26.0	63.5	80.0	37.8	30.0	173.8
SCL630-14	15.0	36.0	44.0	26.0	63.5	80.0	37.8	30.0	173.8
SCL630-16	17.0	36.0	44.0	26.0	63.5	80.0	37.8	30.0	173.8
SCL630-18	19.0	36.0	44.0	26.0	63.5	80.0	37.8	30.0	173.8
SCL630-20	21.0	36.0	44.0	26.0	63.5	80.0	37.8	30.0	173.8
SCL630-22	23.0	36.0	44.0	26.0	63.5	80.0	37.8	30.0	173.8
SCL800-14	15.0	41.6	51.2	29.0	74.0	85.0	41.8	33.0	188.8
SCL800-16	17.0	41.6	51.2	29.0	74.0	85.0	41.8	33.0	188.8
SCL800-18	19.0	41.6	51.2	29.0	74.0	85.0	41.8	33.0	188.8
SCL800-20	21.0	41.6	51.2	29.0	74.0	85.0	41.8	33.0	188.8
SCL1000-14	15.0	46.6	56.6	31.0	81.5	90.0	45.0	36.0	202.0
SCL1000-16	17.0	46.6	56.6	31.0	81.5	90.0	45.0	36.0	202.0
SCL1000-18	19.0	46.6	56.6	31.0	81.5	90.0	45.0	36.0	202.0
SCL1000-20	21.0	46.6	56.6	31.0	81.5	90.0	45.0	36.0	202.0

TTL 铜管端子 Copper Tube Terminals

Permitted crimp in larger size for additional assurance on heavy duty load suitable for terminating cable size from 10-500 SQ.MM.12-35kv.


Material: Copper tube Cu 99% up
Surface: Tin plated

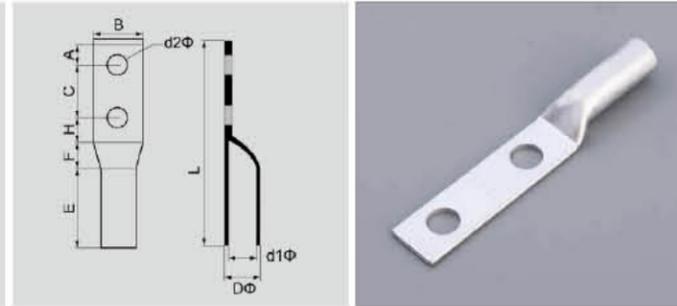

TTL 铜管端子 Copper Tube Terminals

Permitted crimp in larger size for additional assurance on heavy duty load suitable for terminating cable size from 10-500 SQ.MM.12-35kv.

Material: Copper tube Cu 99% up
Surface: Tin plated

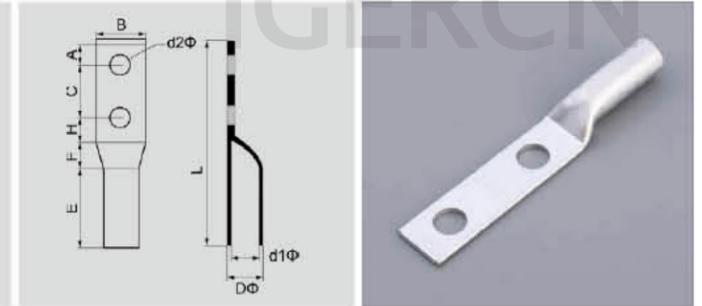


项目/Items	d2	d1	D	A	B	C	E	F	H	L
TTL10-6	6.2	4.5	6.2	7.5	12.0	44.4	21.5	7.4	9.5	90.3
TTL10-8	8.2	4.5	6.2	7.5	12.0	44.4	21.5	7.4	9.5	90.3
TTL10-10	10.2	4.5	6.2	7.5	14.0	44.4	21.5	7.4	9.5	90.3
TTL16-6	6.2	5.4	7.1	8.0	12.0	44.4	25.0	7.4	10.0	94.8
TTL16-8	8.2	5.4	7.1	8.0	12.0	44.4	25.0	7.4	10.0	94.8
TTL16-10	10.2	5.4	7.1	8.0	14.0	44.4	25.0	7.4	10.0	94.8
TTL16-12	12.2	5.4	7.1	8.0	16.5	44.4	25.0	7.4	10.0	94.8
TTL25-6	6.2	6.8	8.8	8.5	15.0	44.4	28.5	7.4	10.5	99.3
TTL25-8	8.2	6.8	8.8	8.5	15.0	44.4	28.5	7.4	10.5	99.3
TTL25-10	10.2	6.8	8.8	8.5	15.0	44.4	28.5	7.4	10.5	99.3
TTL25-12	12.2	6.8	8.8	8.5	16.5	44.4	28.5	7.4	10.5	99.3
TTL35-6	6.2	8.2	10.6	9.0	17.0	44.4	32.0	8.0	11.0	104.4
TTL35-8	8.2	8.2	10.6	9.0	17.0	44.4	32.0	8.0	11.0	104.4
TTL35-10	10.2	8.2	10.6	9.0	17.0	44.4	32.0	8.0	11.0	104.4
TTL35-12	12.2	8.2	10.6	9.0	17.0	44.4	32.0	8.0	11.0	104.4
TTL50-8	8.2	9.5	12.4	12.7	19.0	44.4	35.0	10.9	14.7	117.7
TTL50-10	10.2	9.5	12.4	12.7	19.0	44.4	35.0	10.9	14.7	117.7
TTL50-12	12.2	9.5	12.4	12.7	19.0	44.4	35.0	10.9	14.7	117.7
TTL50-14	14.2	9.5	12.4	12.7	21.0	44.4	35.0	10.9	14.7	117.7
TTL50-16	16.2	9.5	12.4	12.7	23.0	44.4	35.0	10.9	14.7	117.7
TTL70-8	8.2	11.2	14.7	13.9	21.0	44.4	35.0	10.9	17.9	122.1
TTL70-10	10.2	11.2	14.7	13.9	21.0	44.4	35.0	10.9	17.9	122.1
TTL70-12	12.2	11.2	14.7	13.9	21.0	44.4	35.0	10.9	17.9	122.1
TTL70-14	14.2	11.2	14.7	13.9	21.0	44.4	35.0	10.9	17.9	122.1
TTL70-16	16.2	11.2	14.7	13.9	24.0	44.4	35.0	10.9	17.9	122.1
TTL95-8	8.2	13.5	17.4	13.9	25.5	44.4	38.0	15.8	17.9	130.0
TTL95-10	10.2	13.5	17.4	13.9	25.5	44.4	38.0	15.8	17.9	130.0
TTL95-12	12.2	13.5	17.4	13.9	25.5	44.4	38.0	15.8	17.9	130.0

项目/Items	d2	d1	D	A	B	C	E	F	H	L
TTL95-14	14.2	13.5	17.4	13.9	25.5	44.4	38.0	15.8	17.9	130.0
TTL95-16	16.2	13.5	17.4	13.9	25.5	44.4	38.0	15.8	17.9	130.0
TTL120-8	8.2	15.0	19.4	13.9	28.0	44.4	40.0	18.8	17.9	135.0
TTL120-10	10.2	15.0	19.4	13.9	28.0	44.4	40.0	18.8	17.9	135.0
TTL120-12	12.2	15.0	19.4	13.9	28.0	44.4	40.0	18.8	17.9	135.0
TTL120-14	14.2	15.0	19.4	13.9	28.0	44.4	40.0	18.8	17.9	135.0
TTL120-16	16.2	15.0	19.4	13.9	28.0	44.4	40.0	18.8	17.9	135.0
TTL150-10	10.2	16.5	21.2	13.9	30.5	44.4	50.0	19.8	17.9	146.0
TTL150-12	12.2	16.5	21.2	13.9	30.5	44.4	50.0	19.8	17.9	146.0
TTL150-14	14.2	16.5	21.2	13.9	30.5	44.4	50.0	19.8	17.9	146.0
TTL150-16	16.2	16.5	21.2	13.9	30.5	44.4	50.0	19.8	17.9	146.0
TTL185-12	12.2	18.5	23.5	13.9	34.0	44.4	50.0	19.8	17.9	146.0
TTL185-14	14.2	18.5	23.5	13.9	34.0	44.4	50.0	19.8	17.9	146.0
TTL185-16	16.2	18.5	23.5	13.9	34.0	44.4	50.0	19.8	17.9	146.0
TTL185-18	18.2	18.5	23.5	13.9	34.0	44.4	50.0	19.8	17.9	146.0
TTL185-20	20.2	18.5	23.5	13.9	34.0	44.4	50.0	19.8	17.9	146.0
TTL240-12	12.2	21.0	26.5	13.9	38.5	44.4	56.0	24.8	17.9	157.0
TTL240-14	14.2	21.0	26.5	13.9	38.5	44.4	56.0	24.8	17.9	157.0
TTL240-16	16.2	21.0	26.5	13.9	38.5	44.4	56.0	24.8	17.9	157.0
TTL240-18	18.2	21.0	26.5	13.9	38.5	44.4	56.0	24.8	17.9	157.0
TTL240-20	20.2	21.0	26.5	13.9	38.5	44.4	56.0	24.8	17.9	157.0
TTL300-12	12.2	23.5	30.0	13.9	43.5	44.4	67.0	26.8	17.9	170.0
TTL300-14	14.2	23.5	30.0	13.9	43.5	44.4	67.0	26.8	17.9	170.0
TTL300-16	16.2	23.5	30.0	13.9	43.5	44.4	67.0	26.8	17.9	170.0
TTL300-18	18.2	23.5	30.0	13.9	43.5	44.4	67.0	26.8	17.9	170.0
TTL300-20	20.2	23.5	30.0	13.9	43.5	44.4	67.0	26.8	17.9	170.0

TTL 铜管端子 Copper Tube Terminals

Permitted crimp in larger size for additional assurance on heavy duty load suitable for terminating cable size from 10-500 SQ.MM.12-35kv.

Material: Copper tube Cu 99% up
Surface: Tin plated

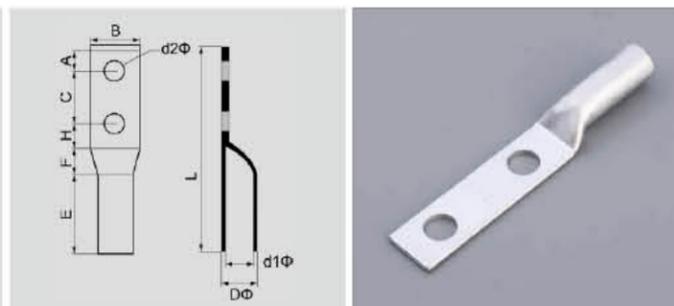


项目/Items	d2	d1	D	A	B	C	E	F	H	L
TTL400-12	13.0	28.5	36.5	13.9	53.0	44.4	67.0	26.8	17.9	170.0
TTL400-14	15.0	28.5	36.5	13.9	53.0	44.4	67.0	26.8	17.9	170.0
TTL400-16	17.0	28.5	36.5	13.9	53.0	44.4	67.0	26.8	17.9	170.0
TTL400-18	19.0	28.5	36.5	13.9	53.0	44.4	67.0	26.8	17.9	170.0
TTL400-20	21.0	28.5	36.5	13.9	53.0	44.4	67.0	26.8	17.9	170.0
TTL400-22	23.0	28.5	36.5	13.9	53.0	44.4	67.0	26.8	17.9	170.0
TTL500-12	13.0	30.0	39.0	13.9	56.0	44.4	75.0	33.8	17.9	185.0
TTL500-14	15.0	30.0	39.0	13.9	56.0	44.4	75.0	33.8	17.9	185.0
TTL500-16	17.0	30.0	39.0	13.9	56.0	44.4	75.0	33.8	17.9	185.0
TTL500-18	19.0	30.0	39.0	13.9	56.0	44.4	75.0	33.8	17.9	185.0
TTL500-20	21.0	30.0	39.0	13.9	56.0	44.4	75.0	33.8	17.9	185.0
TTL500-22	23.0	30.0	39.0	13.9	56.0	44.4	75.0	33.8	17.9	185.0
TTL630-12	13.0	34.5	44.0	16.5	63.5	44.4	80.0	37.8	20.5	199.2
TTL630-14	15.0	34.5	44.0	16.5	63.5	44.4	80.0	37.8	20.5	199.2
TTL630-16	17.0	34.5	44.0	16.5	63.5	44.4	80.0	37.8	20.5	199.2
TTL630-18	19.0	34.5	44.0	16.5	63.5	44.4	80.0	37.8	20.5	199.2
TTL630-20	21.0	34.5	44.0	16.5	63.5	44.4	80.0	37.8	20.5	199.2
TTL630-22	23.0	34.5	44.0	16.5	63.5	44.4	80.0	37.8	20.5	199.2
TTL800-14	15.0	40.0	51.2	16.5	74.0	44.4	85.0	41.8	25.5	213.2
TTL800-16	17.0	40.0	51.2	16.5	74.0	44.4	85.0	41.8	25.5	213.2
TTL800-18	19.0	40.0	51.2	16.5	74.0	44.4	85.0	41.8	25.5	213.2
TTL800-20	21.0	40.0	51.2	16.5	74.0	44.4	85.0	41.8	25.5	213.2
TTL1000-14	15.0	44.0	56.6	16.5	81.5	44.4	90.0	45.0	30.5	226.4
TTL1000-16	17.0	44.0	56.6	16.5	81.5	44.4	90.0	45.0	30.5	226.4
TTL1000-18	19.0	44.0	56.6	16.5	81.5	44.4	90.0	45.0	30.5	226.4
TTL1000-20	21.0	44.0	56.6	16.5	81.5	44.4	90.0	45.0	30.5	226.4

TSC 铜管端子 Copper Tube Terminals

Permitted crimp in larger size for additional assurance on heavy duty load suitable for terminating cable size from 10-500 SQ.MM.12-35kv.

Material: Copper tube Cu 99% up
Surface: Tin plated

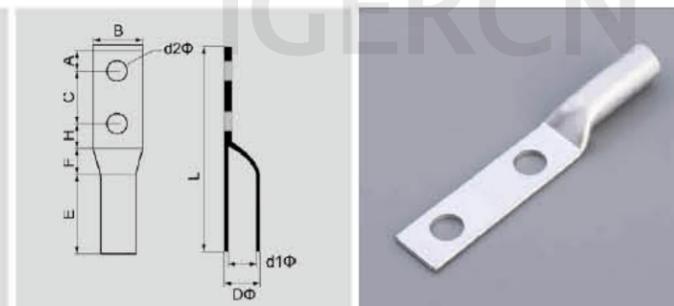


项目/Items	d2	d1	D	A	B	C	E	F	H	L
TSC10-6	6.2	4.6	6.2	7.5	12.0	44.4	21.5	7.4	9.5	90.3
TSC10-8	8.2	4.6	6.2	7.5	12.0	44.4	21.5	7.4	9.5	90.3
TSC10-10	10.2	4.6	6.2	7.5	14.0	44.4	21.5	7.4	9.5	90.3
TSC16-6	6.2	5.5	7.1	8.0	12.0	44.4	25.0	7.4	10.0	94.8
TSC16-8	8.2	5.5	7.1	8.0	12.0	44.4	25.0	7.4	10.0	94.8
TSC16-10	10.2	5.5	7.1	8.0	14.0	44.4	25.0	7.4	10.0	94.8
TSC16-12	12.2	5.5	7.1	8.0	16.5	44.4	25.0	7.4	10.0	94.8
TSC25-6	6.2	7.0	8.8	8.5	15.0	44.4	28.5	7.4	10.5	99.3
TSC25-8	8.2	7.0	8.8	8.5	15.0	44.4	28.5	7.4	10.5	99.3
TSC25-10	10.2	7.0	8.8	8.5	15.0	44.4	28.5	7.4	10.5	99.3
TSC25-12	12.2	7.0	8.8	8.5	16.5	44.4	28.5	7.4	10.5	99.3
TSC35-6	6.5	8.6	10.6	9.0	17.0	44.4	32.0	8.0	11.0	104.4
TSC35-8	8.5	8.6	10.6	9.0	17.0	44.4	32.0	8.0	11.0	104.4
TSC35-10	10.5	8.6	10.6	9.0	17.0	44.4	32.0	8.0	11.0	104.4
TSC35-12	12.5	8.6	10.6	9.0	17.0	44.4	32.0	8.0	11.0	104.4
TSC50-8	8.5	10.0	12.4	12.7	19.0	44.4	35.0	10.9	14.7	117.7
TSC50-10	10.5	10.0	12.4	12.7	19.0	44.4	35.0	10.9	14.7	117.7
TSC50-12	12.5	10.0	12.4	12.7	19.0	44.4	35.0	10.9	14.7	117.7
TSC50-14	15.0	10.0	12.4	12.7	21.0	44.4	35.0	10.9	14.7	117.7
TSC50-16	17.0	10.0	12.4	12.7	23.0	44.4	35.0	10.9	14.7	117.7

TSC 铜管端子 Copper Tube Terminals

Permitted crimp in larger size for additional assurance on heavy duty load suitable for terminating cable size from 10-500 SQ.MM.12-35kv.

Material: Copper tube Cu 99% up
Surface: Tin plated

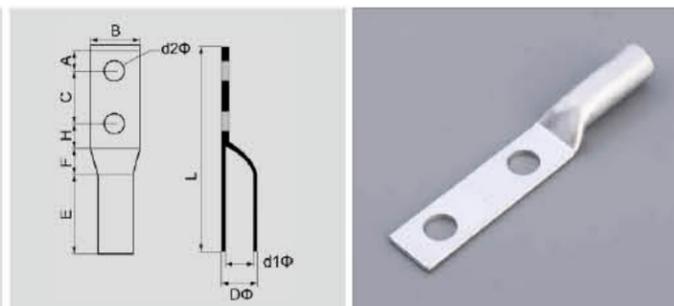


项目/Items	d2	d1	D	A	B	C	E	F	H	L
TSC70-8	8.5	11.9	14.7	13.9	21.0	44.4	35.0	10.9	17.9	122.1
TSC70-10	10.5	11.9	14.7	13.9	21.0	44.4	35.0	10.9	17.9	122.1
TSC70-12	12.5	11.9	14.7	13.9	21.0	44.4	35.0	10.9	17.9	122.1
TSC70-14	15.0	11.9	14.7	13.9	21.0	44.4	35.0	10.9	17.9	122.1
TSC70-16	17.0	11.9	14.7	13.9	24.0	44.4	35.0	10.9	17.9	122.1
TSC95-8	8.5	14.2	17.4	13.9	25.5	44.4	38.0	15.8	17.9	130.0
TSC95-10	10.5	14.2	17.4	13.9	25.5	44.4	38.0	15.8	17.9	130.0
TSC95-12	13.0	14.2	17.4	13.9	25.5	44.4	38.0	15.8	17.9	130.0
TSC95-14	15.0	14.2	17.4	13.9	25.5	44.4	38.0	15.8	17.9	130.0
TSC95-16	17.0	14.2	17.4	13.9	25.5	44.4	38.0	15.8	17.9	130.0
TSC120-8	8.5	15.8	19.4	13.9	28.0	44.4	40.0	18.8	17.9	135.0
TSC120-10	10.5	15.8	19.4	13.9	28.0	44.4	40.0	18.8	17.9	135.0
TSC120-12	13.0	15.8	19.4	13.9	28.0	44.4	40.0	18.8	17.9	135.0
TSC120-14	15.0	15.8	19.4	13.9	28.0	44.4	40.0	18.8	17.9	135.0
TSC120-16	17.0	15.8	19.4	13.9	28.0	44.4	40.0	18.8	17.9	135.0
TSC150-10	10.5	17.4	21.2	13.9	30.5	44.4	50.0	19.8	17.9	146.0
TSC150-12	13.0	17.4	21.2	13.9	30.5	44.4	50.0	19.8	17.9	146.0
TSC150-14	15.0	17.4	21.2	13.9	30.5	44.4	50.0	19.8	17.9	146.0
TSC150-16	17.0	17.4	21.2	13.9	30.5	44.4	50.0	19.8	17.9	146.0
TSC185-12	13.0	19.1	23.5	13.9	34.0	44.4	50.0	19.8	17.9	146.0
TSC185-14	15.0	19.1	23.5	13.9	34.0	44.4	50.0	19.8	17.9	146.0
TSC185-16	17.0	19.1	23.5	13.9	34.0	44.4	50.0	19.8	17.9	146.0
TSC185-18	19.0	19.1	23.5	13.9	34.0	44.4	50.0	19.8	17.9	146.0
TSC185-20	21.0	19.1	23.5	13.9	34.0	44.4	50.0	19.8	17.9	146.0

TSC 铜管端子 Copper Tube Terminals

Permitted crimp in larger size for additional assurance on heavy duty load suitable for terminating cable size from 10-500 SQ.MM.12-35kv.

Material: Copper tube Cu 99% up
Surface: Tin plated

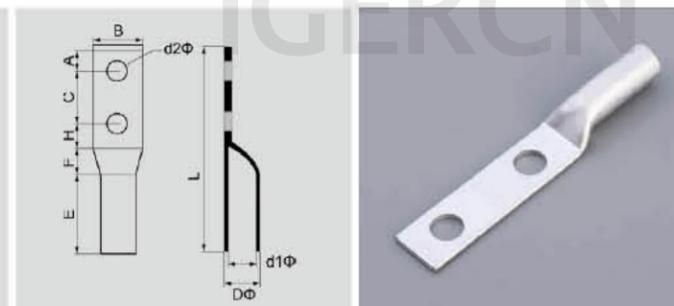


项目/Items	d2	d1	D	A	B	C	E	F	H	L
TSC240-12	13.0	21.9	26.5	13.9	38.5	44.4	56.0	24.8	17.9	157.0
TSC240-14	15.0	21.9	26.5	13.9	38.5	44.4	56.0	24.8	17.9	157.0
TSC240-16	17.0	21.9	26.5	13.9	38.5	44.4	56.0	24.8	17.9	157.0
TSC240-18	19.0	21.9	26.5	13.9	38.5	44.4	56.0	24.8	17.9	157.0
TSC240-20	21.0	21.9	26.5	13.9	38.5	44.4	56.0	24.8	17.9	157.0
TSC300-12	13.0	24.6	30.0	13.9	43.5	44.4	67.0	26.8	17.9	170.0
TSC300-14	15.0	24.6	30.0	13.9	43.5	44.4	67.0	26.8	17.9	170.0
TSC300-16	17.0	24.6	30.0	13.9	43.5	44.4	67.0	26.8	17.9	170.0
TSC300-18	19.0	24.6	30.0	13.9	43.5	44.4	67.0	26.8	17.9	170.0
TSC300-20	21.0	24.6	30.0	13.9	43.5	44.4	67.0	26.8	17.9	170.0
TSC400-12	13.0	29.9	36.5	13.9	53.0	44.4	67.0	26.8	17.9	170.0
TSC400-14	15.0	29.9	36.5	13.9	53.0	44.4	67.0	26.8	17.9	170.0
TSC400-16	17.0	29.9	36.5	13.9	53.0	44.4	67.0	26.8	17.9	170.0
TSC400-18	19.0	29.9	36.5	13.9	53.0	44.4	67.0	26.8	17.9	170.0
TSC400-20	21.0	29.9	36.5	13.9	53.0	44.4	67.0	26.8	17.9	170.0
TSC400-22	23.0	29.9	36.5	13.9	53.0	44.4	67.0	26.8	17.9	170.0
TSC500-12	13.0	31.8	39.0	13.9	56.0	44.4	75.0	33.8	17.9	185.0
TSC500-14	15.0	31.8	39.0	13.9	56.0	44.4	75.0	33.8	17.9	185.0

TSC 铜管端子 Copper Tube Terminals

Permitted crimp in larger size for additional assurance on heavy duty load suitable for terminating cable size from 10-500 SQ.MM.12-35kv.


Material: Copper tube Cu 99% up
Surface: Tin plated

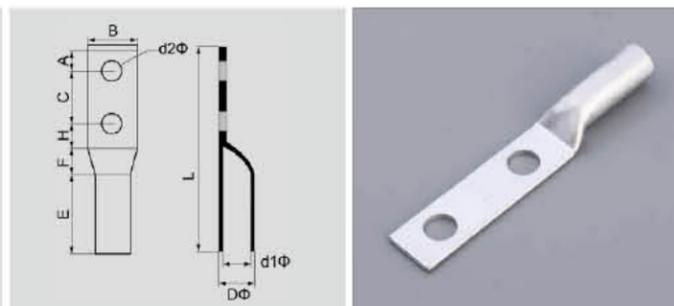

项目/Items	d2	d1	D	A	B	C	E	F	H	L
TSC500-16	17.0	31.8	39.0	13.9	56.0	44.4	75.0	33.8	17.9	185.0
TSC500-18	19.0	31.8	39.0	13.9	56.0	44.4	75.0	33.8	17.9	185.0
TSC500-20	21.0	31.8	39.0	13.9	56.0	44.4	75.0	33.8	17.9	185.0
TSC500-22	23.0	31.8	39.0	13.9	56.0	44.4	75.0	33.8	17.9	185.0
TSC630-12	13.0	36.0	44.0	16.5	63.5	44.4	80.0	37.8	20.5	199.2
TSC630-14	15.0	36.0	44.0	16.5	63.5	44.4	80.0	37.8	20.5	199.2
TSC630-16	17.0	36.0	44.0	16.5	63.5	44.4	80.0	37.8	20.5	199.2
TSC630-18	19.0	36.0	44.0	16.5	63.5	44.4	80.0	37.8	20.5	199.2
TSC630-20	21.0	36.0	44.0	16.5	63.5	44.4	80.0	37.8	20.5	199.2
TSC630-22	23.0	36.0	44.0	16.5	63.5	44.4	80.0	37.8	20.5	199.2
TSC800-14	15.0	41.6	51.2	16.5	74.0	44.4	85.0	41.8	25.5	213.2
TSC800-16	17.0	41.6	51.2	16.5	74.0	44.4	85.0	41.8	25.5	213.2
TSC800-18	19.0	41.6	51.2	16.5	74.0	44.4	85.0	41.8	25.5	213.2
TSC800-20	21.0	41.6	51.2	16.5	74.0	44.4	85.0	41.8	25.5	213.2
TSC1000-14	15.0	46.6	56.6	16.5	81.5	44.4	90.0	45.0	30.5	226.4
TSC1000-16	17.0	46.6	56.6	16.5	81.5	44.4	90.0	45.0	30.5	226.4
TSC1000-18	19.0	46.6	56.6	16.5	81.5	44.4	90.0	45.0	30.5	226.4
TSC1000-20	21.0	46.6	56.6	16.5	81.5	44.4	90.0	45.0	30.5	226.4

SL 铜管端子 Copper Tube Terminals

Material: Copper tube Cu 99% up
Surface: Tin plated

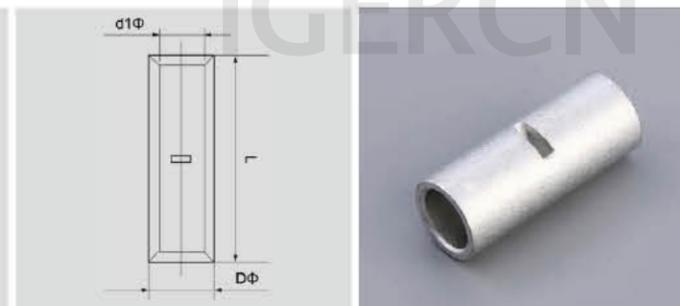


项目/Items	d1	D	L
SL1.5	2.2	3.7	18.0
SL2.5	2.4	3.9	18.0
SL4	2.8	4.5	20.0
SL6	3.8	5.5	24.0
SL10	4.5	6.2	25.0
SL16	5.4	7.1	29.0
SL25	6.8	8.8	29.0
SL35	8.2	10.6	35.0
SL50	9.5	12.4	35.0
SL70	11.2	14.7	45.0
SL95	13.5	17.4	47.0
SL120	15.0	19.4	52.0
SL150	16.5	21.2	59.0
SL185	18.5	23.5	65.0
SL240	21.0	26.5	75.0
SL300	23.5	30.0	90.0
SL400	28.5	36.5	105.0
SL500	30.0	39.0	105.0
SL630	34.5	44.0	120.0
SL800	40.0	51.2	140.0
SL1000	44.0	56.6	160.0



L 铜管端子
Copper Tube Terminals


Material: Copper tube Cu 99% up
Surface: Tin plated

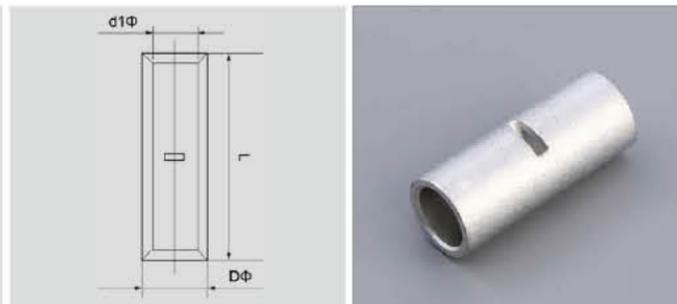

项目/Items	d1	D	L
L1.5	2.7	3.7	18.0
L2.5	2.9	3.9	18.0
L4	3.2	4.5	20.0
L6	4.1	5.5	24.0
L10	4.6	6.2	25.0
L16	5.5	7.1	29.0
L25	7.0	8.8	29.0
L35	8.6	10.6	35.0
L50	10.0	12.4	35.0
L70	11.9	14.7	45.0
L95	14.2	17.4	47.0
L120	15.8	19.4	52.0
L150	17.4	21.2	59.0
L185	19.1	23.5	65.0
L240	21.9	26.5	75.0
L300	24.6	30.0	90.0
L400	29.9	36.5	105.0
L500	31.8	39.0	105.0
L630	36.0	44.0	120.0
L800	41.6	51.2	140.0
L1000	46.6	56.6	160.0



P 铜管端子
Copper Tube Terminals

Material: Copper tube Cu 99% up
Surface: Tin plated

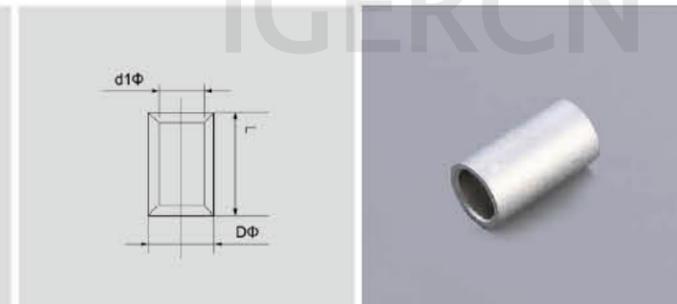

项目/Items	d1	D	L
P10	4.5	6.2	9.5
P16	5.4	7.1	11.0
P25	6.8	8.8	13.5
P35	8.2	10.6	15.0
P50	9.5	12.4	16.5
P70	11.2	14.7	18.5
P95	13.5	17.4	19.0
P120	15.0	19.4	19.5
P150	16.5	21.2	20.0
P185	18.5	23.5	27.0
P240	21.0	26.5	28.5
P300	23.5	30.0	32.0
P400	28.5	36.5	37.0
P500	30.0	39.0	40.0
P630	34.5	44.0	44.0
P800	40.0	51.2	50.0
P1000	44.0	56.6	60.0

DTL1/DTL2 铜铝端子 Bi-metal Lugs

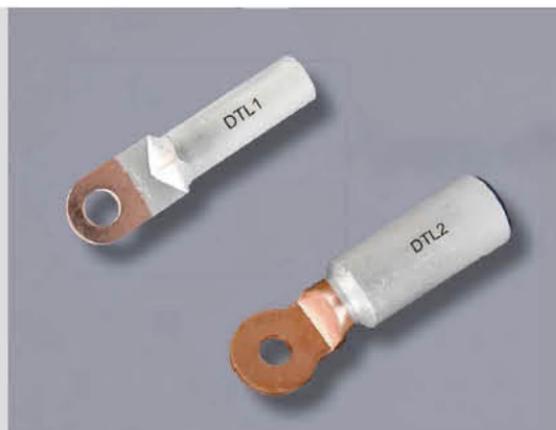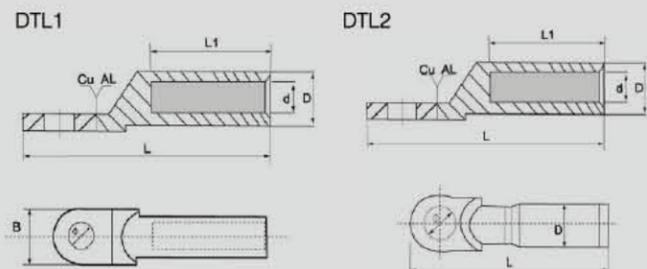

型号/Type	φ	D	d	L	L1	B
DTL-1-10	8.5	10	6	68	28	16
DTL-1-16	8.5	11	6	70	30	16
DTL-1-25	8.5	12	7	75	34	18
DTL-1-35	10.5	14	8.5	85	38	20.5
DTL-1-50	10.5	16	9.8	90	40	23
DTL-1-70	12.5	18	11.5	102	48	26
DTL-1-95	12.5	21	13.5	112	50	28
DTL-1-120	14.5	23	15	120	53	30
DTL-1-150	14.5	25	16.5	126	56	34
DTL-1-185	16.5	27	18.5	133	58	37
DTL-1-240	16.5	30	21	140	60	40
DTL-1-300	21	34	23.5	160	65	50
DTL-1-400	21	38	27	170	70	50
DTL-1-500	21	47	29	225	75	60
DTL-1-630	-	54	35	245	80	80
DTL-1-800	-	60	38	270	90	100

型号/Type	φ	D	d	L	L1
DTL-2-16	13	16	5.5	87	42
DTL-2-25	13	16	6.5	87	42
DTL-2-35	13	16	8	87	42
DTL-2-50	13	20	9	87	43
DTL-2-70	13	20	11	87	43
DTL-2-95	13	20	12.5	87	43
DTL-2-120	13	25	13.5	111	60
DTL-2-150	13	25	15.5	111	60
DTL-2-185	13	32	17.5	116	60
DTL-2-240	13	32	19.5	116	60
DTL-2-300	13	34	22.5	120	62

YQ-70 快速液压钳

- 采用六角型模具压接紧密、导电良好、不易脱落。
- Hexagonal mould is adopted to ensure tight press connection, good electric conduction and non-easy shedding.



工具参数	
应用范围 Range of application	6-70mm ²
出力 Crimping force	6ton
行程 Stroke	10mm
模具配置 Standard	公模 (母模) 8-38, 60-70mm ² , 公模 : 14-22, 38-60, 70mm ²
重量 Weight	2.5Kg
外箱包装尺寸 Packaging size	545x130x235mm
包装 Package	塑料箱 Plastic case

YQK-240A 快速液压钳

- 采用六角型模具压接紧密、导电良好、不易脱落。
- Hexagonal mould is adopted to ensure tight press connection, good electric conduction and non-easy shedding.



工具参数	
应用范围 Range of application	10-185mm ² (铝端子 Al Terminal) 16-240mm ² (铜端子 Cu Terminal)
出力 Crimping force	8ton
行程 Stroke	16mm
模具配置 Standard	16,25,35,50,70,95,120,150,185,240mm ²
重量 Weight	4.8Kg
外箱包装尺寸 Packaging size	545x130x235mm
包装 Package	塑料箱 Plastic case

EP-410 快速液压钳

- 压接头部可以做 180 度的旋转
- Head part can rotate at 180° degrees.



带安全系统 Safety system inside	
工具参数	
应用范围 Range of application	35-240mm ² (铝端子 Al Terminal) 50-300mm ² (铜端子 Cu Terminal)
出力 Crimping force	12ton
行程 Stroke	30mm
模具配置 Standard	50,70,95,120,150,185,240,300mm ²
重量 Weight	6.6Kg
外箱包装尺寸 Packaging size	755x130x230mm
包装 Package	塑料箱 Plastic case

YQK-120A 快速液压钳

- 采用六角型模具压接紧密、导电良好、不易脱落。
- Hexagonal mould is adopted to ensure tight press connection, good electric conduction and non-easy shedding.



工具参数	
应用范围 Range of application	10-120mm ² (铝端子 Al Terminal) 16-120mm ² (铜端子 Cu Terminal)
出力 Crimping force	8ton
行程 Stroke	13mm
模具配置 Standard	16,25,35,50,70,95,120mm ²
重量 Weight	4.8Kg
外箱包装尺寸 Packaging size	545x130x235mm
包装 Package	塑料箱 Plastic case

YQK-300A 快速液压钳

- 采用六角型模具压接紧密、导电良好、不易脱落。
- Hexagonal mould is adopted to ensure tight press connection, good electric conduction and non-easy shedding.



工具参数	
应用范围 Range of application	10-185mm ² (铝端子 Al Terminal) 16-300mm ² (铜端子 Cu Terminal)
出力 Crimping force	8ton
行程 Stroke	16mm
模具配置 Standard	16,25,35,50,70,95,120,150,185,240,300mm ²
重量 Weight	6.4Kg
外箱包装尺寸 Packaging size	755x130x230mm
包装 Package	塑料箱 Plastic case

EP-430 快速液压钳

- 采用六角型模具，压接紧密
- Hexagonal mould is adopted to ensure tight press connection.



带安全系统 Safety system inside	
工具参数	
应用范围 Range of application	35-300mm ² (铝端子 Al Terminal) 50-400mm ² (铜端子 Cu Terminal)
出力 Crimping force	12ton
行程 Stroke	32mm
模具配置 Standard	50,70,95,120,150,185,240,300,400mm ²
重量 Weight	6.4Kg
外箱包装尺寸 Packaging size	755x130x230mm
包装 Package	塑料箱 Plastic case

ZYO-400 快速液压钳

- 采用六角型模具，压接紧密
- Hexagonal mould is adopted to ensure tight press connection.



带安全系统 Safety system inside

工具参数	
应用范围 Range of application	50-300mm ² (铝端子 Al Terminal) 70-400mm ² (铜端子 Cu Terminal)
出力 Crimping force	12ton
行程 Stroke	16mm
模具配置 Standard	50,70,95,120,150,185,240,300,400mm ²
重量Weight	5.5Kg
外箱包装尺寸 Packaging size	545x130x235mm
包装 Package	塑料箱 Plastic case

CPO-150S 快速液压钳

- 泵体连体设计，压接头部可以180度旋转。
- Pressing head part can rotate at 180 degrees of angle.



带安全系统 Safety system inside

工具参数	
应用范围 Range of application	8-100mm ² (铝端子 Al Terminal) 16-150mm ² (铜端子 Cu Terminal)
出力 Crimping force	10ton
行程 Stroke	14mm
模具配置 Standard	16,25,35,50,70,95,120,150mm ²
重量Weight	4.8Kg
外箱包装尺寸 Packaging size	545x130x235mm
包装 Package	塑料箱 Plastic case

ZCO-300 快速液压钳

- 采用六角型模具，压接紧密
- Hexagonal mould is adopted to ensure tight press connection.

带安全系统
Safety system inside

工具参数	
应用范围 Range of application	10-240mm ² (铝端子 Al Terminal) 16-300mm ² (铜端子 Cu Terminal)
出力 Crimping force	10ton
行程 Stroke	30mm
模具配置 Standard	16,25,35,50,70,95,120,150,185,240,300mm ²
重量Weight	5Kg
外箱包装尺寸 Packaging size	545x130x235mm
包装 Package	塑料箱 Plastic case

ZHO-300 快速液压钳

- 采用六角型模具，压接紧密
- Hexagonal mould is adopted to ensure tight press connection.



带安全系统 Safety system inside

工具参数	
应用范围 Range of application	35-240mm ² (铝端子 Al Terminal) 16-300mm ² (铜端子 Cu Terminal)
出力 Crimping force	10ton
行程 Stroke	16mm
模具配置 Standard	16,25,35,50,70,95,120,150,185,240,300mm ²
重量Weight	4.5Kg
外箱包装尺寸 Packaging size	545x130x235mm
包装 Package	塑料箱 Plastic case

CYO-300C 快速液压钳

- 采用六角型模具，压接紧密
- Hexagonal mould is adopted to ensure tight press connection.



带安全系统 Safety system inside

工具参数	
应用范围 Range of application	35-240mm ² (铝端子 Al Terminal) 50-300mm ² (铜端子 Cu Terminal)
出力 Crimping force	12ton
行程 Stroke	30mm
模具配置 Standard	50,70,95,120,150,185,240,300mm ²
重量Weight	6.2Kg
外箱包装尺寸 Packaging size	545x130x235mm
包装 Package	塑料箱 Plastic case

ZCO-400 快速液压钳

- 采用六角型模具，压接紧密
- Hexagonal mould is adopted to ensure tight press connection.

带安全系统
Safety system inside

工具参数	
应用范围 Range of application	50-300mm ² (铝端子 Al Terminal) 70-400mm ² (铜端子 Cu Terminal)
出力 Crimping force	12ton
行程 Stroke	32mm
模具配置 Standard	50,70,95,120,150,185,240,300,400mm ²
重量 Weight	6.5Kg
外箱包装尺寸 Packaging size	545x130x235mm
包装 Package	塑料箱 Plastic case

HT-51 快速液压钳

- 双速装置将压模快速送到压接管，压接力上升，然后自动转换到低速，省时又省力。
- 压接头部可以自由旋转180度，可在较窄地方工作。
- 内置调压阀，当压力达到设定最大压力时可自动泄压，防止工具过压。
- Dies are quickly put on tube by double speed unit. The operation finish with energy saving and time shorten.
- The head could be rotated at 180° freely for narrow space working.
- Fitted with safety valve, When pressure reaches to limited max, Value pressure release automatically to prevent over pressure.



工具参数	
应用范围 Range of application	10-240mm ²
出力 Crimping force	8ton
行程 Stroke	16mm
模具配置 Standard	10,16,25,35,50,70,95,120,150,185,240mm ²
重量Weight	2.75Kg
外箱包装尺寸 Packaging size	380x130x70mm
包装 Package	塑料箱 Plastic case

QZD-300A 快速液压钳

- 工具头可以180度旋转。
- 可互换的压接模具，有多种压接几何形状。
- The tool head can be fully rotated through 180 degrees.
- With interchangeable crimping dies with multiple crimping geometry 's.



工具参数	
应用范围 Range of application	16-300mm ²
出力 Crimping force	11ton
行程 Stroke	17mm
模具配置 Standard	16,25,35,50,70,95,120,150,185,240,300mm ²
重量 Weight	5.0Kg
外箱包装尺寸 Packaging size	690x250x120mm
包装 Package	铝合金密码箱 Aluminum alloy code case

**QZD-400A 快速液压钳**

- 工具头可以180度旋转。
- 可互换的压接模具，有多种压接几何形状。
- The tool head can be fully rotated through 180 degrees.
- With interchangeable crimping dies with multiple crimping geometry 's.



工具参数	
应用范围 Range of application	16-400mm ²
出力 Crimping force	11ton
行程 Stroke	16mm
模具配置 Standard	16,25,35,50,70,95,120,150,185,240,300,400mm ²
重量 Weight	6.2Kg
外箱包装尺寸 Packaging size	690x250x120mm
包装 Package	铁箱 Steel case