



输出端

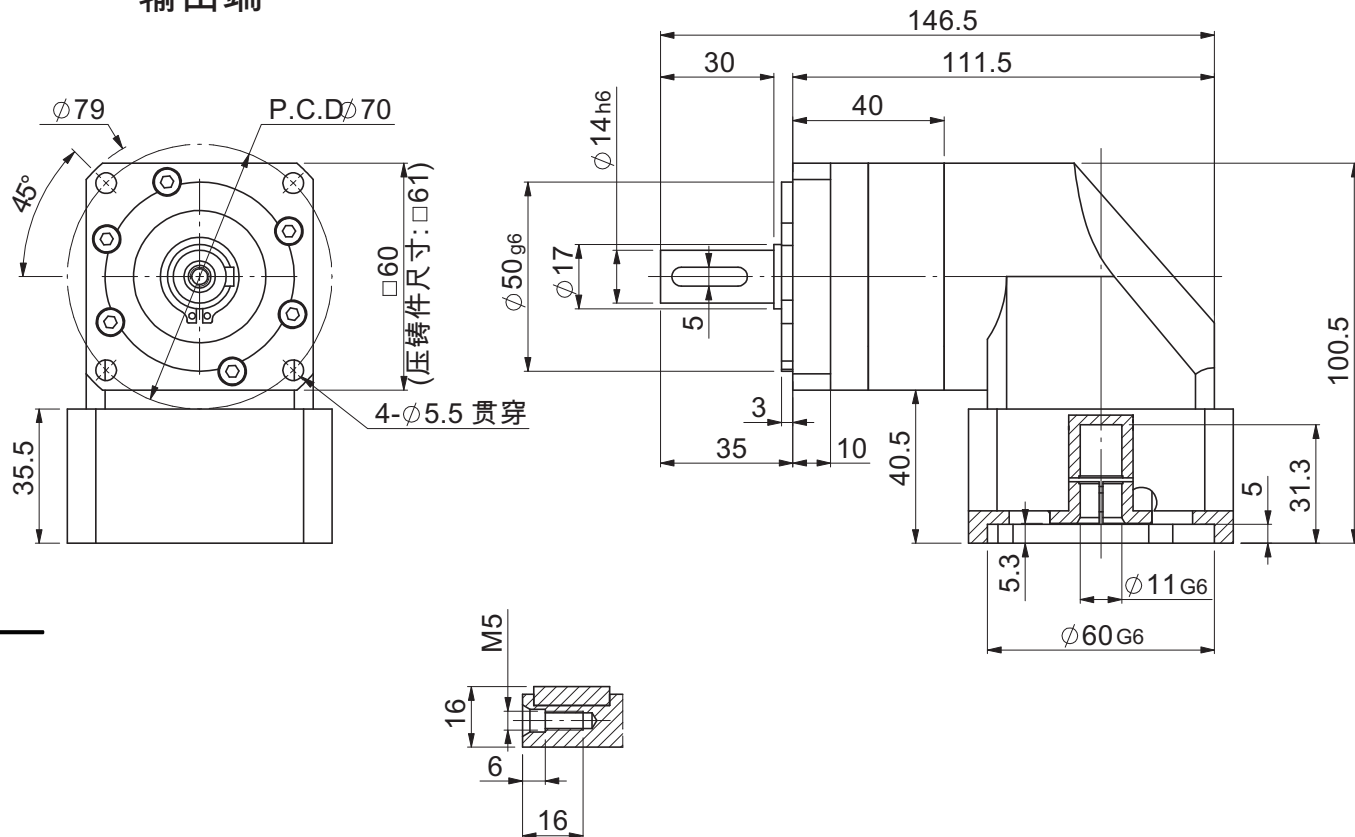

输入端

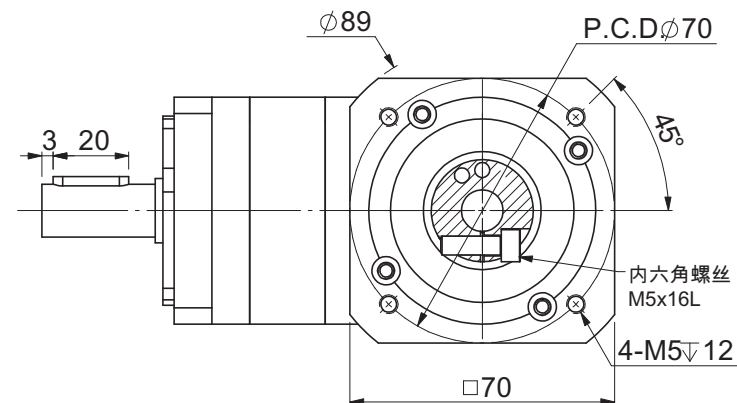

				产品型号 Product Model	传动比 Transmission ratio	额定输出扭矩Nm Rated out put torque	传动惯量kg.cm² Mass moments of inertia		
名称 Title	精密行星减速机 Precision planetary reducer		客户P0/项目物料编码 Customer project material code		PVFA040-3-S2-P2	3	16	0.10	
最大输出扭矩 Max.Out put torque	1.5倍额定扭矩 1.5 times rated torque	润滑方式 Lubricating method	长效润滑 Synthetic grease	请确认签名/日期 Please confirm signature/date		PVFA040-4-S2-P2	4	16	0.10
额定输入转速 Rated input speed	4500rpm	最大输入转速 Max. input speed	8000rpm			PVFA040-5-S2-P2	5	15	0.10
容许径向力 Max. radial force	185N	容许轴向力 Max. axial force	150N			PVFA040-7-S2-P2	7	12	0.06
效率 Efficiency	95%	使用温度 Operating temperature	-10℃~ +90℃	版本 Edition Version	22A/01	PVFA040-10-S2-P2	10	10	0.06
传标准侧隙 Standard backlash	≤8arcmin	使用寿命 Srvice life	20000h	阶段标记 Stage Mark					
安装方式 Mounting position	任意 Any	防护等级 Protection class	IP65	第一角画法 First Angle projection					
噪音值 Noise level	≤58dB	重量 ± 3% Weight ±3%	0.43Kg						
电机尺寸 Motor dimensions						Email:info@www.ngt-china.com		备注	

规格尺寸如有变动，恕不另行通知 (Above specification are for standard reeducer, No standard reducer only for reference)