


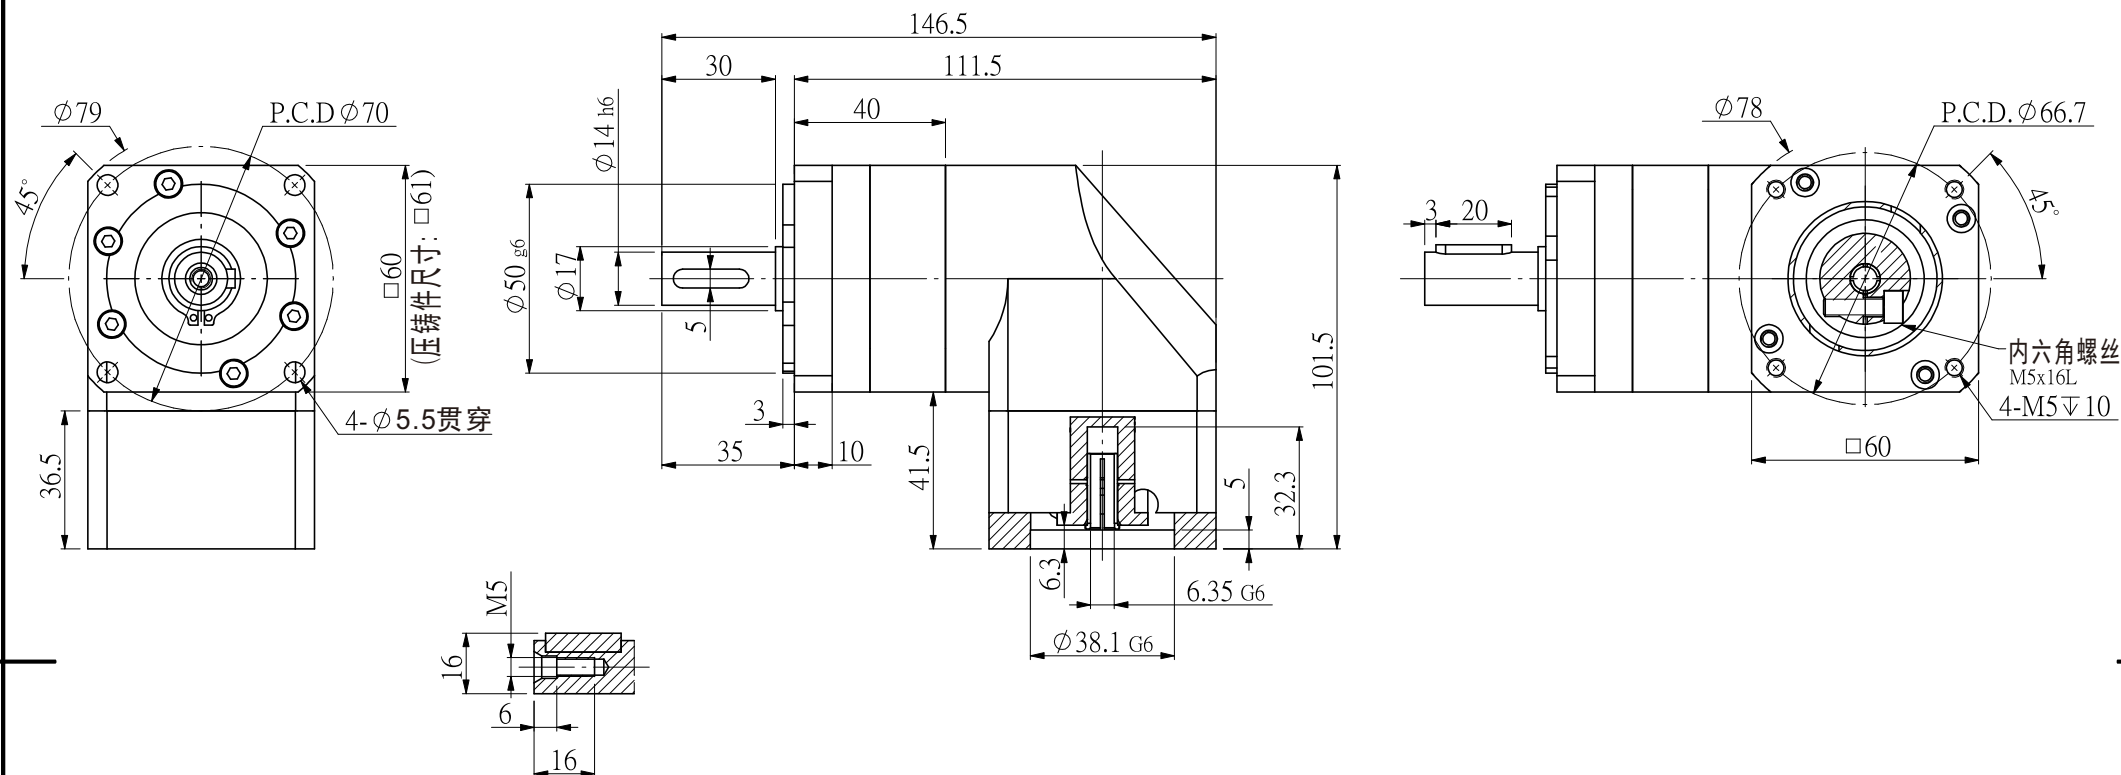

输入变径套8转6.35，请回签确认

名称 Title	精密行星减速机 Precision planetary reducer		客户P0/项目物料编码 Customer project material code	产品型号 Product Model	传动比 Transmission ratio	额定输出扭矩Nm Rated output torque	传动惯量kg.cm ² Mass moments of inertia
最大输出扭矩 Max. Out put torque	1.5倍额定扭矩 1.5 times rated torque	润滑方式 Lubricating method	长效润滑 Synthetic grease	请确认签名/日期 Please confirm signature/date			
额定输入转速 Rated input speed	4000rpm	最大输入转速 Max. input speed	8000rpm	PVFA060-3-S2-P2	3	27	0.46
容许径向力 Max. radial force	240N	容许轴向力 Max. axial force	220N	PVFA060-4-S2-P2	4	40	0.46
效率 Efficiency	95%	使用温度 Operating temperature	-10℃~ +90℃	PVFA060-5-S2-P2	5	40	0.46
传标准侧隙 Standard backlash	≤16arcmin	使用寿命 Srvice life	20000h	PVFA060-7-S2-P2	7	34	0.41
安装方式 Mounting position	任意 Any	防护等级 Protection class	IP65	PVFA060-10-S2-P2	10	16	0.41
噪音值 Noise level	≤58dB	重量 ± 3% Weight ±3%	1.7Kg	恩坦斯特® ANDANTEX			
电机尺寸 Motor dimensions	Email:info@www.ngt-china.com			备注			

规格尺寸如有变动，恕不另行通知 (Above specification are for standard reeducer, No standard reducer only for reference)