



QMT031A-I
松下FP0系列PLC输入模块专用转换端子台
8 bit transition terminal block with indicator



特点 Features

- *采用10P MIL连接器，转换为10P端子台，专为松下FPO系列输入模块设计；
- *可以用QX200-10P，QX210-10P的10芯通用线缆连接，可替代松下原装端子台；
- *采用动作LED显示，动作状态一目了然。

外形图 Dimensions

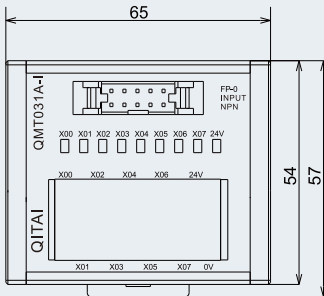

- *用2个M4的螺丝可固定在零件安装的地方。建议使用M4X16的螺丝，螺纹孔深3mm以上。
- *可安装在标准35mm的DIN导轨上。
- * Screw Mounting:use M4*16 screw,screw hole depth≥3mm.
- * DIN Rail Mounting:Standard 35mm DIN RAIL.

(单位:mm)



基本样式 （输入部额定值/性能）
Rated current and voltage specification

额定电流 Nominal operating current	1A
额定电压 Nominal coil voltage	DC24V
适合电线 For wire	1.5 mm ² Following/AWG16

输入/输出侧对应
Corresponding Input/Output Devices

	Manufacturers	PLC Module
输入侧对应 Corresponding Input Devices	Panasonic Fp0. FpΣ series	FP0-C16T/C16CT(IN Ministry) FP0-C16P/C16CP(IN Ministry) FP0-C32T/C32CT/T32CT(IN Ministry) FP0-C32P/C32CP/T32CP(IN Ministry) FP0-E16T/P(IN Ministry) FP0-E32T/P(IN Ministry) FP0-E8X FP0-E16X FPΣ-C28(IN Ministry) FPΣ-C32(IN Ministry)
输出侧对应 Corresponding output Devices		Button Switch , Photoelectric Switch , Solenoid , Indicator , Stepping Servo Motor

配线图 Wiring Diagram

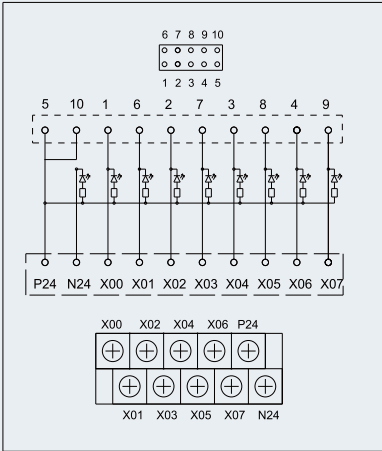


QMT031A-I

关联产品
Related products

QX200-10
QX210-1

压着端子
Crimping Terminal





QMT031A-O
松下FP0系列PLC输出模块专用转换端子台
8 bit transition terminal block with indicator



特点 Features

- *采用10P MIL连接器，转换为10P端子台，专为松下FPO系列输出模块设计；
- *可以用QX200-10P ,QX210-10P的10芯通用线缆连接，可替代松下原装端子台；
- *采用动作LED显示，动作状态一目了然。

外形图 Dimensions

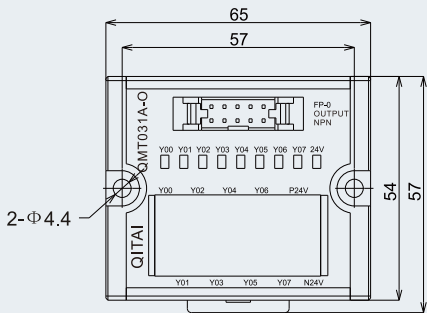

- *用2个M4的螺丝可固定在零件安装的地方。建议使用M4X16的螺丝，螺纹孔深3mm以上。
- *可安装在标准35mm的DIN导轨上。
- * Screw Mounting:use M4*16 screw,screw hole depth≥3mm.
- * DIN Rail Mounting:Standard 35mm DIN RAIL.

(单位:mm)



基本样式 （输入部额定值/性能）
Rated current and voltage specification

额定电流 Nominal operating current	1A
额定电压 Nominal coil voltage	DC24V
适合电线 For wire	1.5 mm ² Following/AWG16

输入/输出侧对应
Corresponding Input/Output Devices

	Manufacturers	PLC Module
输入侧对应 Corresponding Input Devices	Panasonic Fp0. FpΣ series	FP0-C16T/C16CT(Out Ministry) FP0-C16P/C16CP(Out Ministry) FP0-C32T/C32CT/T32CT(Out Ministry) FP0-C32P/C32CP/T32CP(Out Ministry) FP0-E16T/P(Out Ministry) FP0-E32T/P(Out Ministry) FP0-E8YT FP0-E16YT FPΣ-C32(Out Ministry) FPΣ-C28(Out Ministry)
输出侧对应 Corresponding output Devices		Button Switch , Photoelectric Switch , Solenoid , Indicator , Stepping Servo Motor

配线图 Wiring Diagram

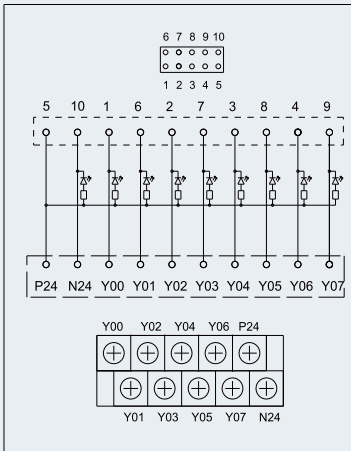


QMT031A-I

关联产品
Related products

QX200-10
QX210-1



压着端子
Crimping Terminal



QMT031
带指示灯8位转换端子台
8 bit transition terminal block with indicator



外形图 Dimensions

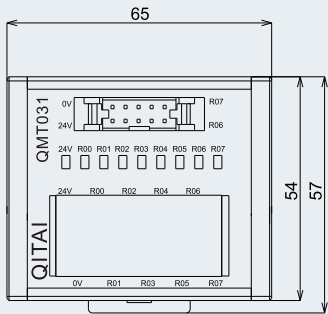

* 可安装在标准35mm的DIN导轨上
* DIN Rail Mounting:Standard 35mm DIN RAIL.

(单位:mm)


基本样式 （输入部额定值/性能）
Rated current and voltage specification

额定电流 Nominal operating current	1A
额定电压 Nominal coil voltage	DC24V
适合电线 For wire	1.5 mm ² Following/AWG16

输入/输出侧对应
Corresponding Input/Output Devices

	Manufacturers	PLC Module
	KEYENCE	KV-B16XA/XC KV series of small PLC
输入侧对应 Corresponding Input Devices	Panasonic Fp0. FpΣ series	FP0-C16T/C16CT(IN Ministry) FP0-C16P/C16CP(IN Ministry) FP0-C32T/C32CT/T32CT(IN Ministry) FP0-C32P/C32CP/T32CP(IN Ministry) FP0-E16T/P(IN Ministry) FP0-E32T/P(IN Ministry) FP0-E8X FP0-E16X FPZ-C28(IN Ministry) FPZ-C32(IN Ministry) FP0-C16T/C16CT(Out Ministry) FP0-C16P/C16CP(Out Ministry) FP0-C32T/C32CT/T32CT(Out Ministry) FP0-C32P/C32CP/T32CP(Out Ministry) FP0-E16T/P(Out Ministry) FP0-E32T/P(Out Ministry) FP0-E8YT FP0-E16YT FPZ-C32(Out Ministry) FPZ-C28(Out Ministry)
		Button Switch , Photoelectric Switch , Solenoid , Indicator , Stepping Servo Motor

配线图 Wiring Diagram

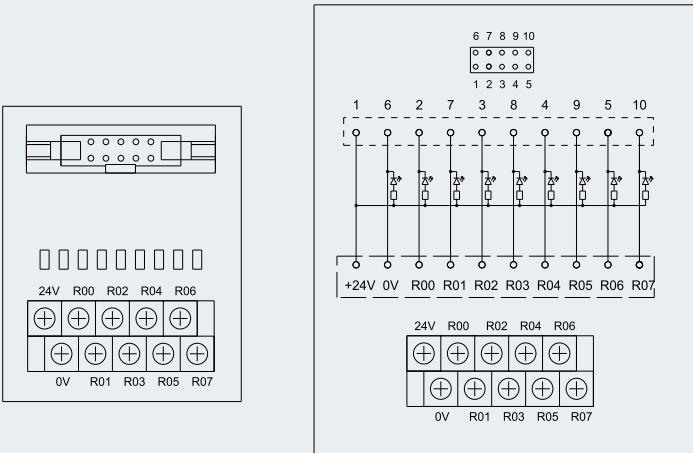


QMT031

关联产品
Related products

QX216-1 QX200-1
QX216-2 QX210-1
QX216-3



压着端子
Crimping Terminal



QMT032
20位端子台
20 bit terminal block



外形图 Dimensions

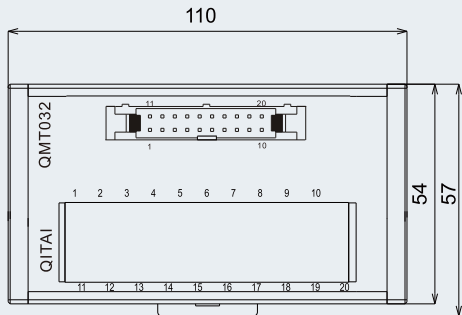

* 可安装在标准35mm的DIN导轨上
*DIN Rail Mounting:Standard 35mm DIN RAIL.

(单位:mm)


基本样式 （输入部额定值/性能）
Rated current and voltage specification

额定电流 Nominal operating current	1A
额定电压 Nominal coil voltage	DC24V
适合电线 For wire	1.5 mm ² Following/AWG16

输入/输出侧对应
Corresponding Input/Output Devices


	Manufacturers	PLC Module
	OMRON	CJ1W-MD232 CJ1W-MD233
输入侧对应 Corresponding Input Devices	MITSUBISHI Fxseries	FX1NC-16MT FX1NC-32MT FX2NC-16MT FX2NC-32MT FX3UC-32MT FX2NC-16EX FX2NC-16EX-C FX2NC-16EXL-C FX2NC-16EYT FX2NC-17EYT-C FX2N-10PG FX2N-10GM FX2N-20GM
		Servo motor control signal line circuit

配线图 Wiring Diagram

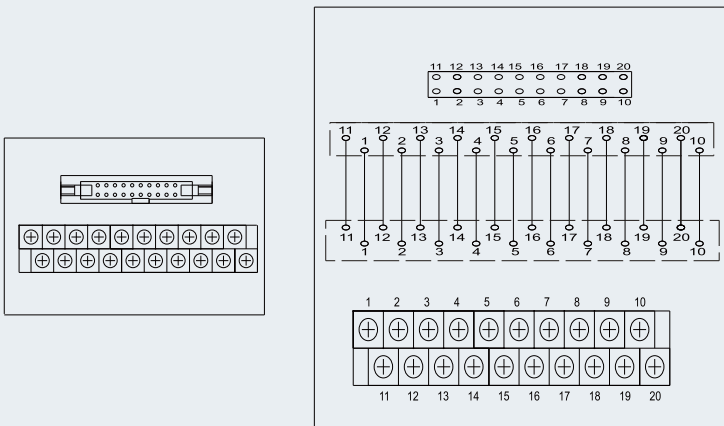

QMT032

压着端子
Crimping Terminal



关联产品
Related products

QX200-2 QX220-3
QX210-2 QX218-9
QX218-1

QMT033
34位端子台



34 bit terminal block



特点 Features

- *本产品为34P连接器对应34P端子连接；
- *可对应市面上所有带34P MIL插头的PLC连接。

外形图 Dimensions

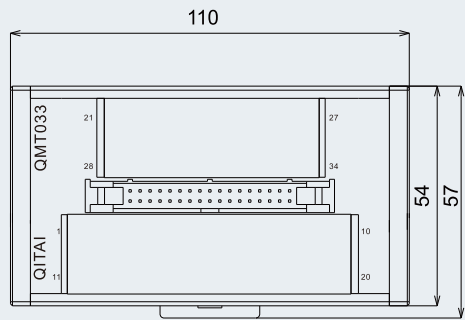

*可安装在标准35mm的DIN导轨上。
*DIN Rail Mounting:Standard35mmDINRAIL.

(单位:mm)

基本样式 （输入部额定值/性能）
Rated current and voltage specification

额定电流 Nominal operating current	1A
额定电压 Nominal coil voltage	DC24V
适合电线 For wire	1.5 mm² Following/AWG16


输入/输出侧对应
Corresponding Input/Output Devices

输入侧对应 Corresponding Input Devices	Manufacturers	PLC Module
	KEYENCE	KV-C32XA/C KV-C64XA/C KV-C32TA/C KV-C64TA/C
输出侧对应 Corresponding output Devices	Button Switch , Photoelectric Switch , Solenoid , Indicator , Stepping Servo Motor	

关联产品
Related products

QX200-3
QX210-3

压着端子
Crimping Terminal





QMT034
40位端子台

40 bit terminal block



外形图 Dimensions

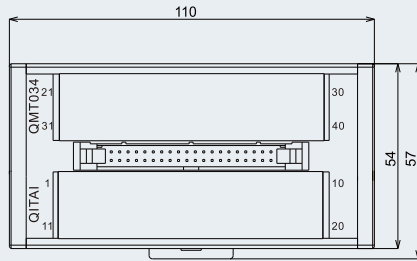

*可安装在标准35mm的DIN导轨上。
*DIN Rail Mounting:Standard 35mm DIN RAIL.

(单位:mm)


输入/输出侧对应
Corresponding Input/Output Devices

输入侧对应 Corresponding Input Devices	Manufacturers	PLC Module
	KEYENCE	KV-1000 KV-3000 KV-5000 KV-H20S KV-H40S
	OMRON	CJ1W-ID231 CJ1W-ID261 CJ1W-MD261(IN terminal) CJ1W-ID232 CJ1W-ID262 CJ1W-MD263(IN terminal) CJ1W-MD563(IN terminal) CJ1W-OD231 CJ1W-OD261 CJ1W-MD261(Out terminal) CJ1W-OD232 CJ1W-OD233 CJ1W-OD262 CJ1W-OD263 CJ1W-MD263(Out terminal) CJ1W-MD563(Out terminal) CJ1M-CPU21 CJ1M-CPU22 CJ1M-CPU23
	MITSUBISHI Qseries	Qx41 QX41-S1 Qx42 QX42-S1 Qx71 Qx72 QY41P QY42P Qy71 QH42P QD70P4 QD70P QD70D QD75M
	Panasonic Fp0. Fpz series	FPG-XT64D2T/P
	Panasonic FP2 series	FP2-C1D FP2-X32D2 FP2-X64D2 FP2-32T/P FP2-Y64T/P FP2-XY64D2T/XY64D7T FP2-XY64D2P/XY64D7P FP2-PP21 FP2-PP22 FP2-PP41 FP2-PP42 FP2-HSCT FP2-PXYT
输出侧对应 Corresponding output Devices	SIEMENS	40P Plug with a full range
	Yokogawa PLCFA-M3 Series	F3WD64-3N F3WD64-3F F3WD32-3F
Stepping Servo Motor , Button Switch , Photoelectric Switch , Indicator , Relay or Contactor		

基本样式 （输入部额定值/性能）
Rated current and voltage specification

额定电流 Nominal operating current	1A
额定电压 Nominal coil voltage	DC24V
适合电线 For wire	1.5 mm² Following/AWG16

配线图 Wiring Diagram

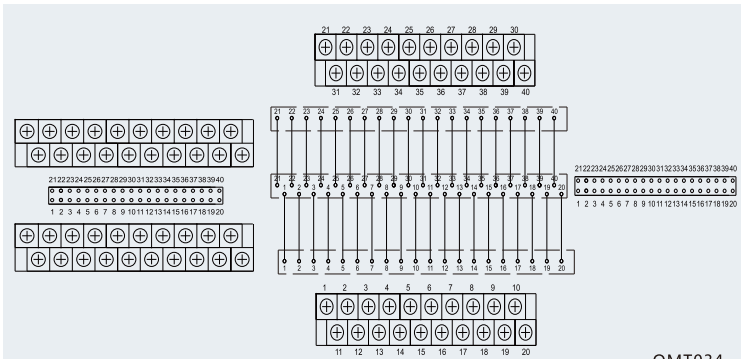

关联产品
Related products

QX210-4
QX200-4
QX210-5
QX218-6

压着端子
Crimping Terminal

