

QTB20 20位端子台


20 bit terminal block



特点 Features

- *本产品为20P连接器对应20P端子连接；采用一对一设计；
- *可对应市面上所有带有20P MIL插头的PLC连接；
- *配合本公司的QX220-3可以用来转接任何品牌的20P接口的伺服驱动器。

外形图 Dimensions

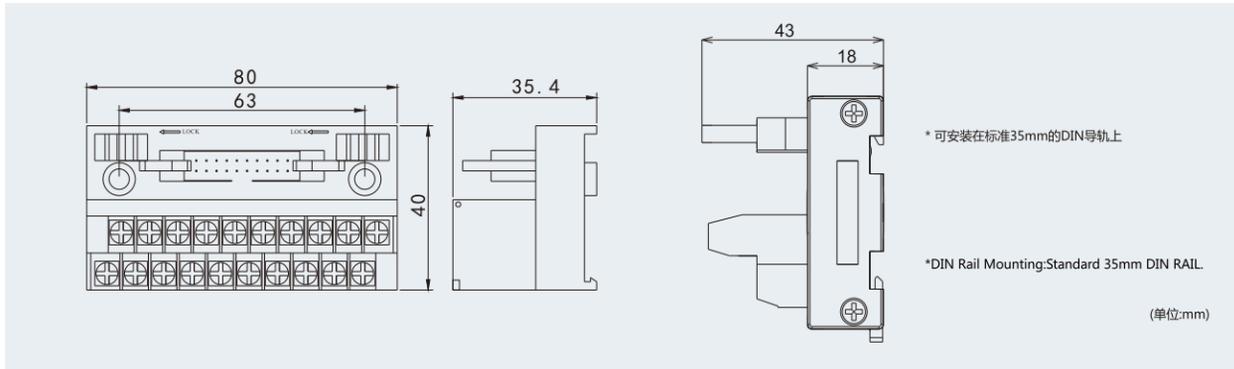


基本样式 (输入部额定值/性能) Rated current and voltage specification

额定电流 Nominal operating current	1A
额定电压 Nominal coil voltage	DC24V
适合电线 For wire	1.5 mm ² Following/AWG16

输入/输出侧对应 Corresponding Input/Output Devices

输入侧对应 Corresponding Input Devices	Manufacturers	PLC Module
	OMRON	CJ1W-MD232 CJ1W-MD233
MITSUBISHI Fxseries	FX1NC-16MT FX1NC-32MT FX2NC-16MT FX2NC-32MT FX3UC-32MT FX2NC-16EX FX2NC-16EX-C FX2NC-16EXL-C FX2NC-16EYT FX2NC-17EYT-C FX2N-10PG FX2N-10GM FX2N-20GM	
输出侧对应 Corresponding output Devices	Servo motor control signal line circuit	


配线图 Wiring Diagram

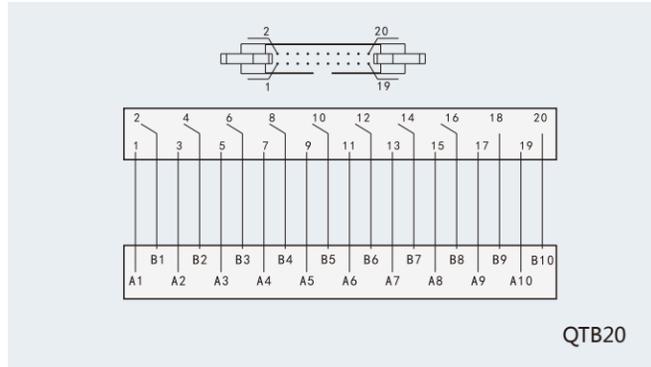

关联产品 Related products

QX200-2 **QX220-3**
QX210-2 **QX218-9**
QX218-1

剥线长度 Wire stripping Recommendation



QTB40 40位端子台

40 bit terminal block



特点 Features

- *本产品为40P连接器对应40P端子连接；
- *体积最小化设计；
- *适用于所有40P，MIL接口PLC；


基本样式 (输入部额定值/性能) Rated current and voltage specification

额定电流 Nominal operating current	1A
额定电压 Nominal coil voltage	DC24V
适合电线 For wire	1.5 mm ² Following/AWG16


输入/输出侧对应 Corresponding Input/Output Devices

输入侧对应 Corresponding Input Devices	Manufacturers	PLC Module
	KEYENCE	KV-1000 KV-3000 KV-5000 KV-H205 KV-H405
OMRON	CJ1W-ID231 CJ1W-ID261 CJ1W-MD261(IN terminal) CJ1W-ID232 CJ1W-ID262 CJ1W-MD263(IN terminal) CJ1W-MD563(IN terminal) CJ1W-OD231 CJ1W-OD261 CJ1W-MD261(Out terminal) CJ1W-OD232 CJ1W-OD262 CJ1W-OD263 CJ1W-MD263(Out terminal) CJ1W-MD563(Out terminal) CJ1M-CPU21 CJ1M-CPU22 CJ1M-CPU23	
MITSUBISHI Qseries	Qx41 QX41-S1 Qx42 QX42-S1 Qx71 Qx72 QY41P QY42P Qy71 QH42P QD70P4 QD70P QD70D QD75M	
Panasonic Fp0 series	FPΣ -XT64D2T/P	
Panasonic FP2 series	FP2-C1D FP2-X32D2 FP2-X64D2 FP2-32T/P FP2-Y64T/P FP2-XY64D2T/XY64D7T FP2-XY64D2P/XY64D7P FP2-PP21 FP2-PP22 FP2-PP41 FP2-PP42 FP2-HSCT FP2-PXYT	
SIEMENS	40P Plug with a full range	
Yokogawa PLCFA-M3 Series	F3WD64-3N F3WD64-3F F3WD32-3F	
输出侧对应 Corresponding output Devices	Button Switch Photoelectric Switch Solenoid, Indicator, Relay or Contactor.etc.	

外形图 Dimensions

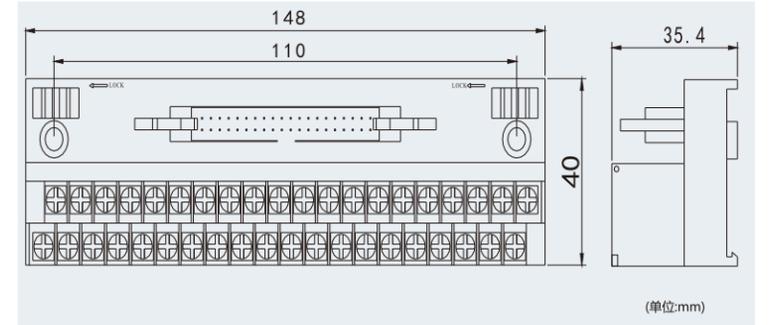


配线图 Wiring Diagram

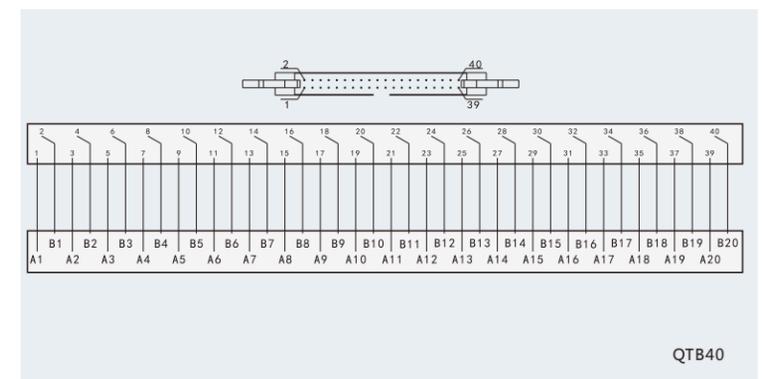

关联产品 Related products

QX217-1 QX200-4
QX217-2 QX210-4
QX212-1 QX210-5
QX219-2


剥线长度 Wire stripping Recommendation

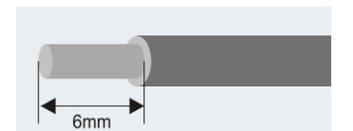


QTB50
50位端子台
50 bit terminal block



外形图 Dimensions

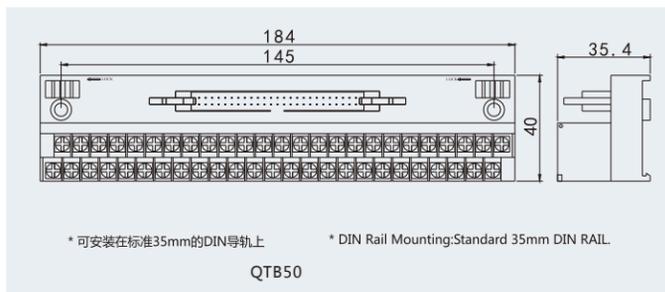

配线图 Wiring Diagram

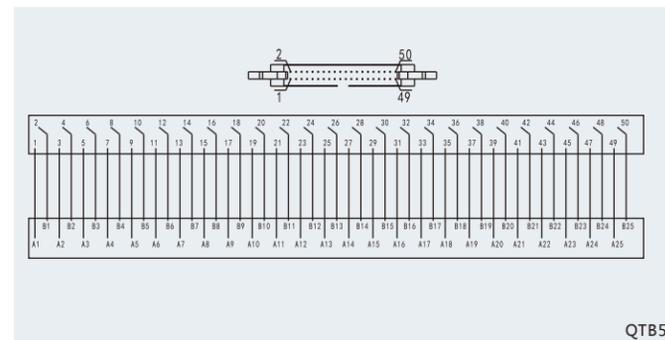

特点 Features

- *本接线板对应50P的MIL连接器；
- *适用于所有50P接口伺服控制器的转接；
- *无需焊线，只需看准一一对一管脚接线即可；
- *配合本公司QX220-4系列电缆，可以实现伺服控制线的快速转接；
- *配合本公司QX200-5系列和QX210-7系列可以将50位MIL接口转为端子接线；


基本样式 (输入部额定值/性能)
Rated current and voltage specification

额定电流 Nominal operating current	1A
额定电压 Nominal coil voltage	DC24V
适合电线 For wire	1.5 mm ² Following/AWG16

关联产品
Related products

QX200-5
QX210-7
QX220-4


剥线长度
Wire stripping Recommendation

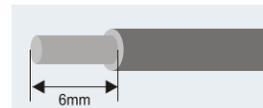


QTB-COM20/QTB-COM20B
公用端端子台
Common terminal block



QTB-COM40/QTB-COM40B
2极AC/DC分线端子台
General terminal block

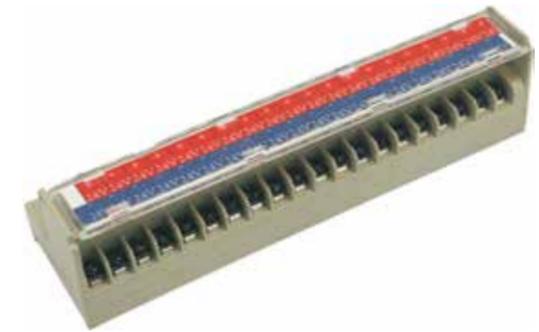

外形图 Dimensions

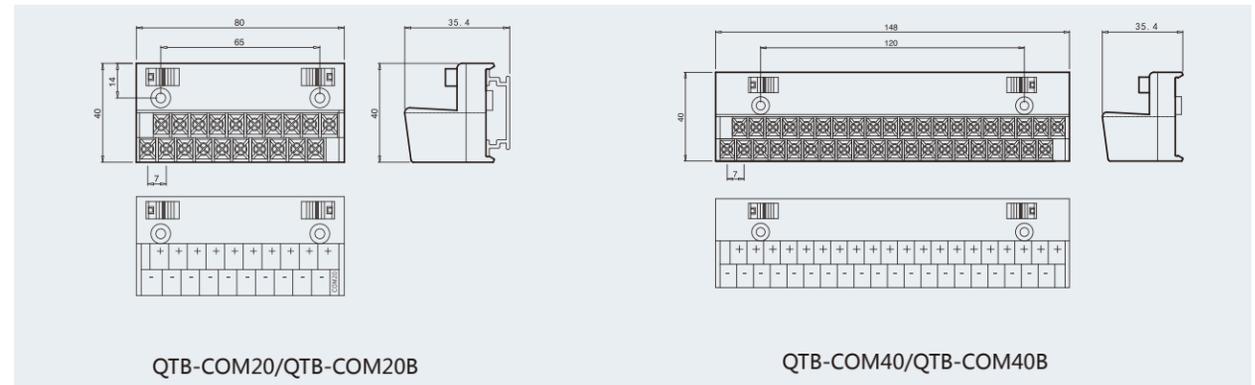


基本样式 (输入部额定值/性能)
Rated current and voltage specification

	QMT075	QMT075-2
额定电流 Nominal operating current	10A	15A
额定电压 Nominal coil voltage	DC24V	AC220V
适合电线 For wire	1.5 mm ² Following/AWG16	

输入/输出侧对应
Corresponding Input/Output Devices

输入侧对应 Corresponding Input Devices	Switching Power Supply DC Output
输出侧对应 Corresponding output Devices	The various branches of the load components

剥线长度
Wire stripping Recommendation

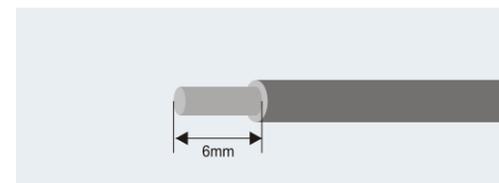

配线图 Wiring Diagram

