


A TYPE

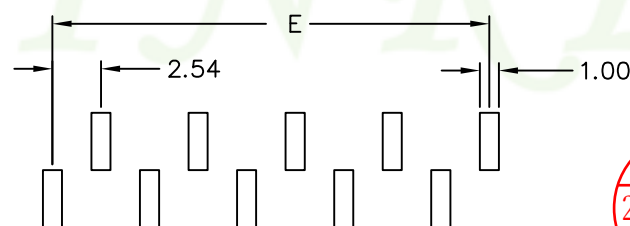

B TYPE

Recommended P.C.B Layout

MATERIAL

Contact Pin : Brass

Insulator: Thermoplastic High Temp UL94-V0

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

212-x 1- xx x x xx
1 2 3 4 5 6

- 7: Green Product
- 9: Green Product High Temp
- 1: Single row
- 2: Dual rows
- No. of contacts per row
- G: Gold flash
- S: Selective
- T: Tin plated
- B: Black Insulator
- W: White Insulator
- Pinrex internal code.

POLES	DIM E	DIM F	POLES	DIM E	DIM F
2	2.54	4.73	21	50.80	52.99
3	5.08	7.27	22	53.34	55.53
4	7.62	9.81	23	55.88	58.07
5	10.16	12.35	24	58.42	60.61
6	12.70	14.89	25	60.96	63.15
7	15.24	17.43	26	63.50	65.69
8	17.78	19.97	27	66.04	68.23
9	20.32	22.51	28	68.58	70.77
10	22.86	25.05	29	71.12	73.31
11	25.40	27.59	30	73.66	75.85
12	27.94	30.13	31	76.20	78.39
13	30.48	32.67	32	78.74	80.93
14	33.02	35.21	33	81.28	83.47
15	35.56	37.75	34	83.82	86.01
16	38.10	40.29	35	86.36	88.55
17	40.64	42.83	36	88.90	91.09
18	43.18	45.37	37	91.44	93.63
19	45.72	47.91	38	93.98	96.17
20	48.26	50.45	39	96.52	98.71
			40	99.06	101.6

文管中心
2020.11.04
發行章

TOLERANCE			UNITS : mm		OLD PART NO.		TITLE		P PINREX 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
.0	=±.30		SCALE	SIZE	SHEET	REV.	APP'D	NEW PART NO.	
.00	=±.20		NONE	A4	1 OF 1	A	李劍	212-x1-xxxxxx	DRAW NO.
.000	=±.XXX								212-x1-xxxxxx(網頁專用圖)
.0000=±.									
ANG.=±3'									
A	RELEASE	2020/10/28							
REV.	DESCRIPTION	DATE							