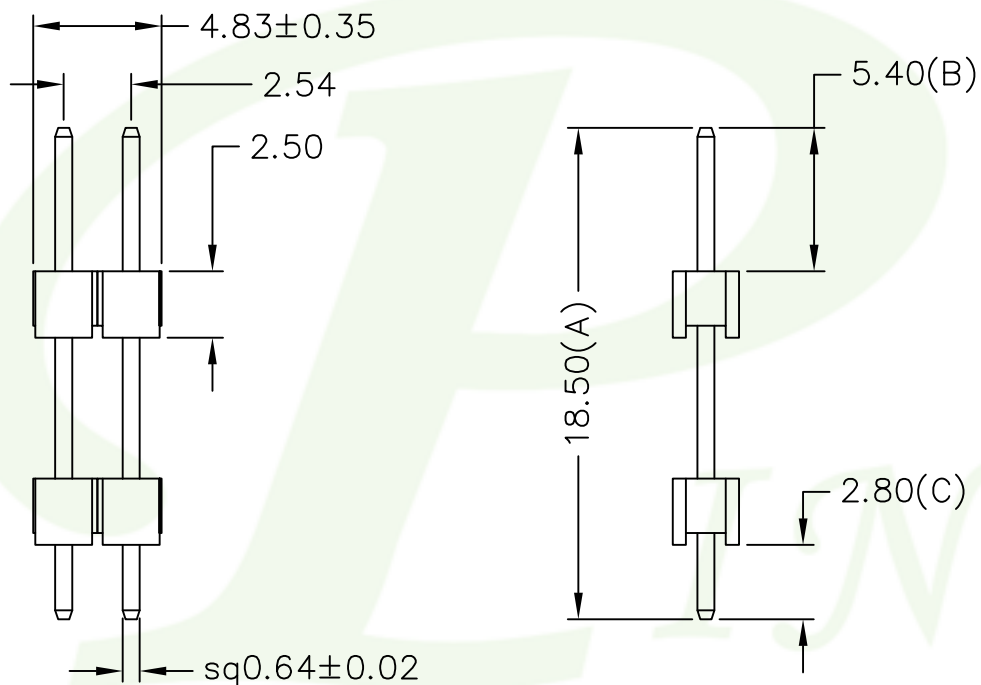
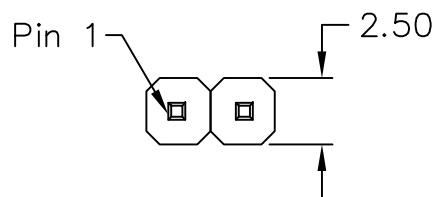


Recommended P.C.B Layout

MATERIAL

Insulator: Thermoplastic High Temp UL94-V0
Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Dielectric Voltage : AC 500V for one minute
Operation Temperature: -40°C to +105°C

213-x 1- xx x x xx
1 2 3 4 5 6

1. 7: Green Product
9: Green Product High Temp
2. 1: Single row
2: Dual rows
3. No. of contacts per row
4. G: Gold flash
5. B: Black Insulator
W: White Insulator
6. Pinrex internal code.



			TOLERANCE		OLD PART NO.		TITLE		 频锐科技股份有限公司 PINREX TECHNOLOGY CORP.
			.0 =±.30		UNITS : mm		PIN HEADER 2.54*2.54mm		
			.00 =±.20		SCALE NONE	DRAWER 麦文慧	STRAIGHT TYPE, SINGLE ROW		
			.000 =±.XXX		SIZE A4	CHECK 李劍	DUAL INSULATORS		
A	RELEASE	2020/10/28	.0000=±.		SHEET 1 OF 1	REV. A	NEW PART NO.	213-x1-xxxxxx	DRAW NO.
REV.	DESCRIPTION	DATE	ANG.=±3'			APP'D 李劍			213-x1-xxxxxx(網頁專用圖)