
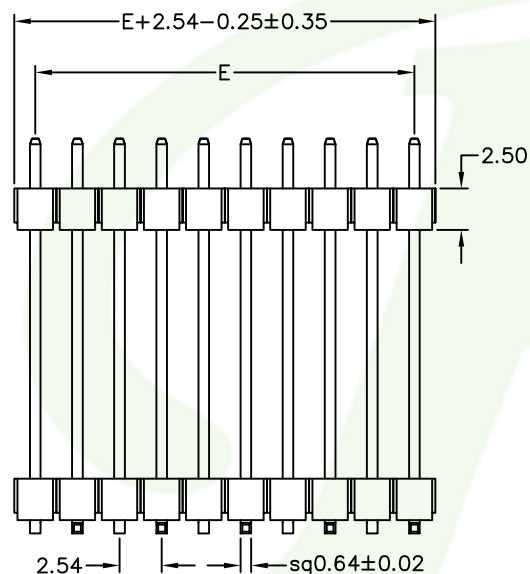
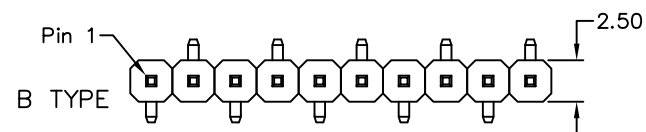
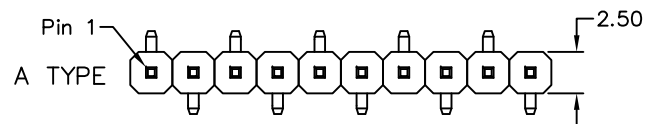


Recommended P.C.B Layout

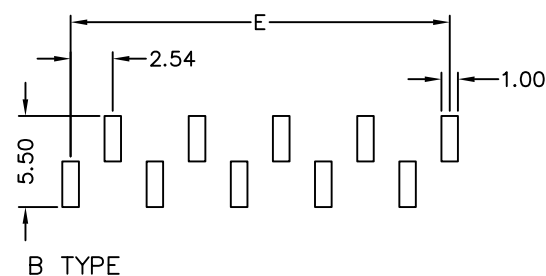

MATERIAL

Contact Pin : Brass

Insulator: Thermoplastic High Temp UL94-V0

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

215-x 1- xx x x xx
1 2 3 4 5 6


- 7: Green Product
- 9: Green Product High Temp
- 1: Single row
- 2: Dual rows
- No. of contacts per row
- G: Gold flash
- S: Selective
- B: 10u"Gold plated
- B: Black Insulator
- Pinrex internal code.

POLES	DIM E	POLES	DIM E
		21	50.80
2	2.54	22	53.34
3	5.08	23	55.88
4	7.62	24	58.42
5	10.16	25	60.96
6	12.70	26	63.50
7	15.24	27	66.04
8	17.78	28	68.58
9	20.32	29	71.12
10	22.86	30	73.66
11	25.40	31	76.20
12	27.94	32	78.74
13	30.48	33	81.28
14	33.02	34	83.82
15	35.56	35	86.36
16	38.10	36	88.90
17	40.64	37	91.44
18	43.18	38	93.98
19	45.72	39	96.52
20	48.26	40	99.06



TOLERANCE

.0 =±.30
.00 =±.20
.000 =±.XXX
.0000=±.
ANG.=±3'



UNITS : mm

SCALE
NONE

SIZE
A4

OLD PART NO.

DRAWER 姜文慧

SHEET
1 OF 2

REV.
A

CHECK 李劍

APP'D 李劍

TITLE
PIN HEADER 2.54*2.54mm
SMT S/T TYPE, SINGLE ROW
DUAL INSULATORS, CAP+TUBE

NEW PART NO.
215-x1-xxxxxx



頻銳科技股份有限公司
PINREX TECHNOLOGY CORP.

DRAW NO.
215-x1-xxxxxx(網頁專用圖)

REV.	DESCRIPTION	DATE
A	RELEASE	2020/10/28