


MATERIAL
Insulator: Thermoplastic High Temp UL94-V0
Contact Pin : Brass

SPECIFICATION
Current Rate : 3 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Dielectric Voltage : AC 500V for one minute
Operation Temperature : -40°C to +105°C

216-x 1- xx x x xx
1 2 3 4 5 6

- 1. 7: Green Product
- 9: Green Product High Temp
- 2. 1: Single row
- 2: Dual rows
- 3. No. of contacts per row
- 4. G: Gold flash
- S: Selective
- T: Tin plated
- 5. B: Black Insulator
- W: White Insulator
- 6. Pinrex internal code.

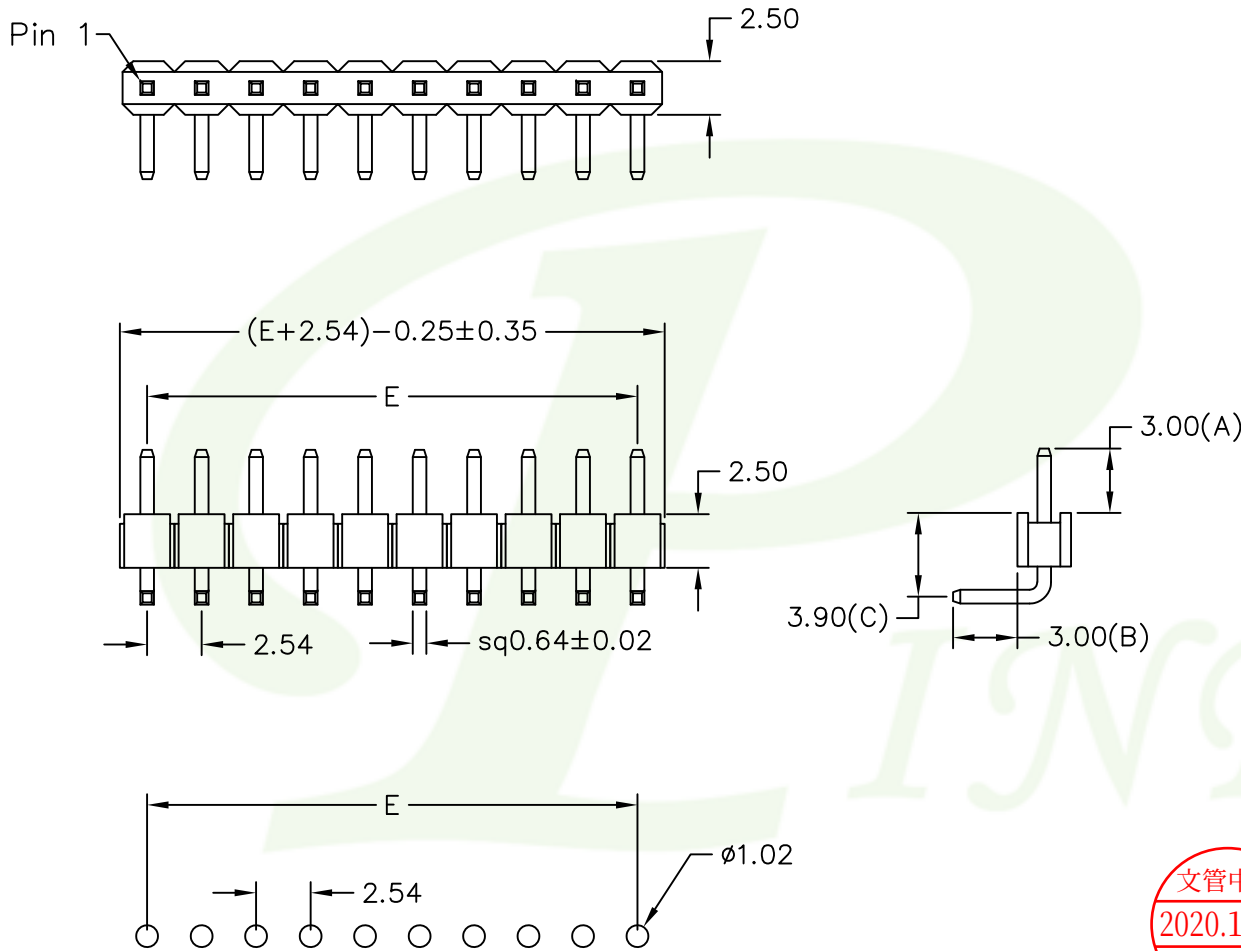

Recommended P.C.B Layout

POLES	DIM E	POLES	DIM E
		21	50.80
2	2.54	22	53.34
3	5.08	23	55.88
4	7.62	24	58.42
5	10.16	25	60.96
6	12.70	26	63.50
7	15.24	27	66.04
8	17.78	28	68.58
9	20.32	29	71.12
10	22.86	30	73.66
11	25.40	31	76.20
12	27.94	32	78.74
13	30.48	33	81.28
14	33.02	34	83.82
15	35.56	35	86.36
16	38.10	36	88.90
17	40.64	37	91.44
18	43.18	38	93.98
19	45.72	39	96.52
20	48.26	40	99.06

文管中心
2020.11.04
發行章

			TOLERANCE		OLD PART NO.		TITLE	
			.0	=±.30	DRAWER 麦文慧		PIN HEADER 2.54*2.54mm	
			.00	=±.20	CHECK 李劍		RIGHT ANGLE TYPE, SINGLE ROW	
			.000	=±.XXX	APP'D 李劍		OPPOSITE INSULATOR	
A RELEASE			.0000=±.		NEW PART NO.		PINREX TECHNOLOGY CORP.	
REV. DESCRIPTION			ANG.=±3'		216-x1-xxxxxx		DRAW NO. 216-x1-xxxxxx (網頁專用圖)	
					SCALE NONE		SIZE A4	
					SHEET 1 OF 1		REV. A	