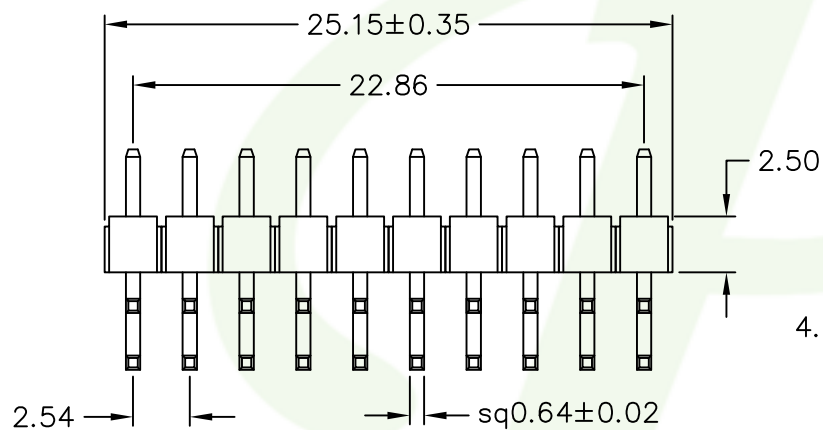
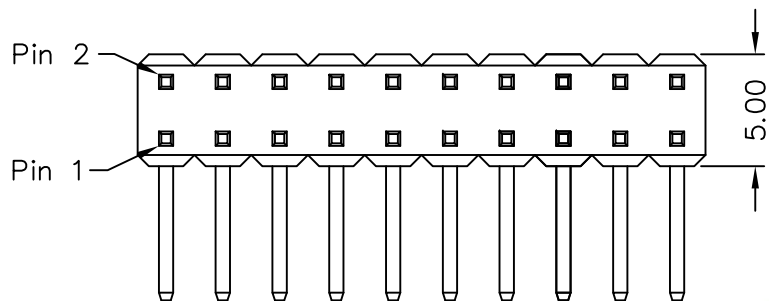


Recommended P.C.B Layout

MATERIAL

Contact Pin : Brass

Insulator: Thermoplastic High Temp UL94-V0

SPECIFICATION


Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

216-x $\frac{2}{1}$ - $\frac{xx}{2}$ x $\frac{x}{3}$ x $\frac{xx}{4}$ x $\frac{xx}{5}$ x $\frac{xx}{6}$

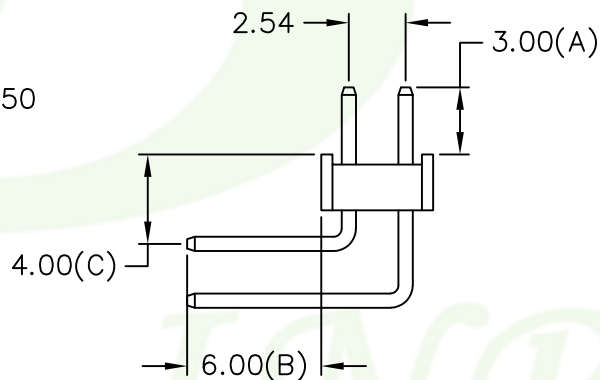

- 7: Green Product
9: Green Product High Temp
- 1: Single row
2: Dual rows
- No. of contacts per row
- G: Gold flash
S: Selective
T: Tin plated
- B: Black Insulator
W: White Insulator
- Pinrex internal code.



			TOLERANCE				OLD PART NO.		TITLE		 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
			.0 =±.30		UNITS : mm	DRAWER 姜文慧	CHECK 李劍	PIN HEADER 2.54*2.54mm			
			.00 =±.20					RIGHT ANGLE TYPE, DUAL ROWS			
			.000 =±.XXX								
A	RELEASE	2020/10/28	.0000=±.		SCALE	SIZE	SHEET	REV.	APP'D	NEW PART NO.	DRAW NO.
REV.	DESCRIPTION	DATE	ANG.=±3'		NONE	A4	1 OF 1	A	李劍	216-x2-xxxxxxx	216-x2-xxxxxxx (網頁專用圖)