


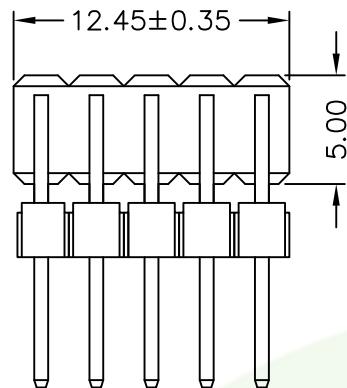

MATERIAL

Insulator: Thermoplastic High Temp UL94-V0

Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP




Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operating Temperature: -40°C to +105°C

218-x 2-xx x x xx
1 2 3 4 5 6

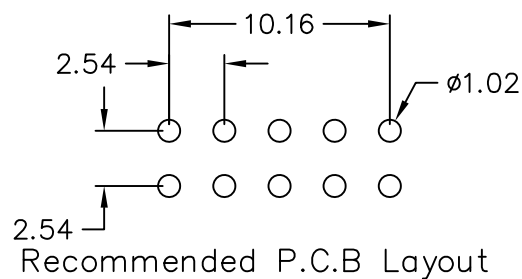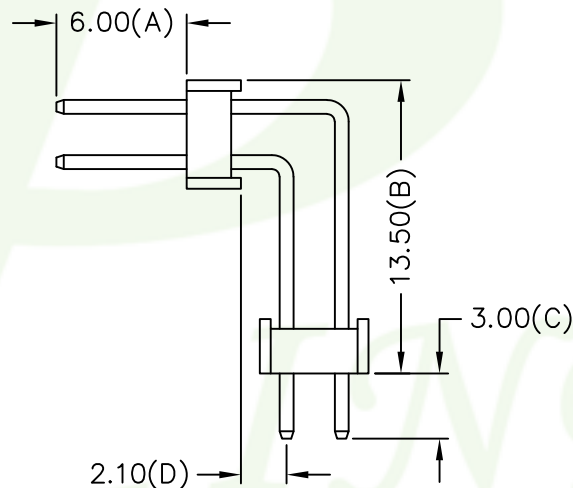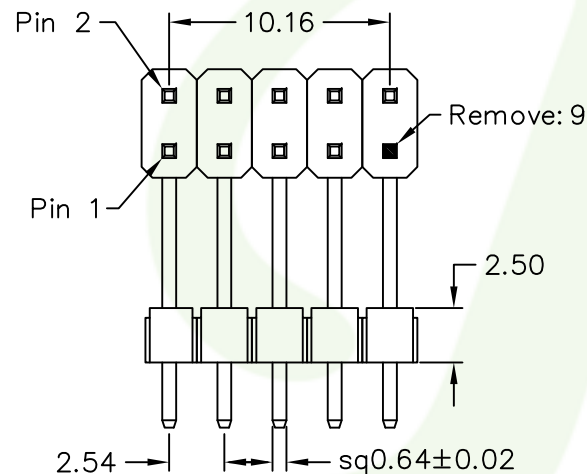

Recommended P.C.B Layout

- 7: Green Product
9: Green Product High Temp
- 1: Single row
2: Dual rows
- No. of contacts per row
- G: Gold flash
S: Selective
T: Tin plated
- B: Black Insulator
- Pinrex internal code.



					TOLERANCE				OLD PART NO.			TITLE PIN HEADER 2.54*2.54mm RIGHT ANGLE TYPE, DUAL ROWS DUAL INSULATORS			 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.							
					.0 =±.30 .00 =±.20 .000 =±.XXX .0000=±. ANG.=±3°		UNITS : mm		DRAWER 姜文慧		CHECK 李劍											
A RELEASE			2020/10/28				SCALE NONE		SIZE A4		SHEET 1 OF 1		REV. A		APP'D 李劍		NEW PART NO. 218-x2-xxxxxxx			DRAW NO. 218-x2-xxxxxxx (網頁專用圖)		
REV. DESCRIPTION			DATE																			