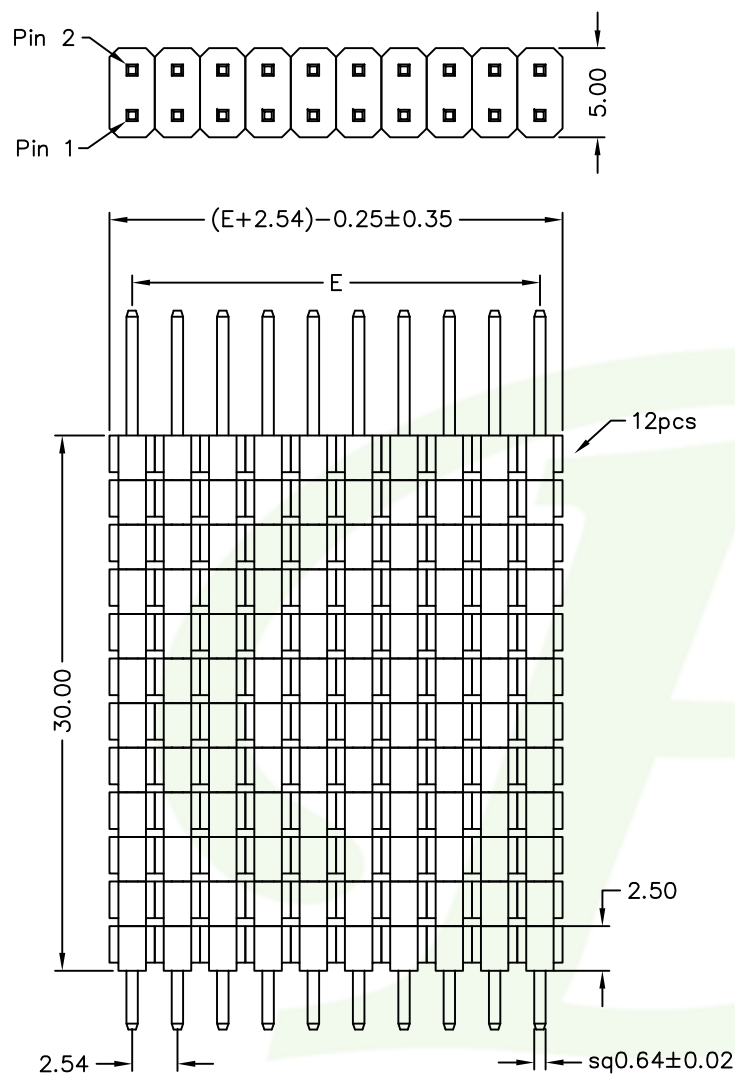


MATERIAL

Contact Pin : Brass

Insulator : Thermoplastic High Temp UL94-V0

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

21C-9 2- xx G B 40
1 2 3 4 5 6

- 5: Normal Parts
- 7: Green Product
- 9: Green Product High Temp
- 1: Single row
- 2: Dual rows
- 3: No. of contacts per row
- 4: G: Gold flash
S: Selective
T: Tin plated
- 5: B: Black Insulator
- 6: Pinrex internal code.

POLES	DIM E	POLES	DIM E
2	2.54	21	50.80
3	5.08	22	53.34
4	7.62	23	55.88
5	10.16	24	58.42
6	12.70	25	60.96
7	15.24	26	63.50
8	17.78	27	66.04
9	20.32	28	68.58
10	22.86	29	71.12
11	25.40	30	73.66
12	27.94	31	76.20
13	30.48	32	78.74
14	33.02	33	81.28
15	35.56	34	83.82
16	38.10	35	86.36
17	40.64	36	88.90
18	43.18	37	91.44
19	45.72	38	93.98
20	48.26	39	96.52
		40	99.06



			TOLERANCE		UNITS : mm		OLD PART NO.		TITLE		 频锐科技股份有限公司 PINREX TECHNOLOGY CORP.
			.0	±.30							
			.00	±.20							
			.000	±.XXX							
A	RELEASE	2020/10/27	.0000	±.							
REV.	DESCRIPTION	DATE	ANG.	±3'	SCALE	SIZE	SHEET	REV.	APP'D	NEW PART NO.	DRAW NO.
					NONE	A4	1 OF 1	A	李剑	21C-x2-xxxxxx	21C-x2-xxxxxx(網頁專用圖)