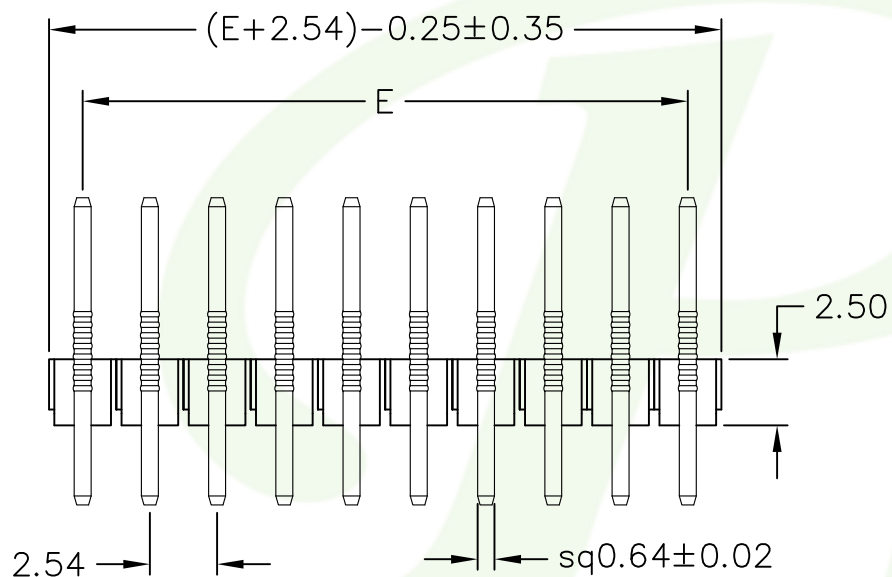
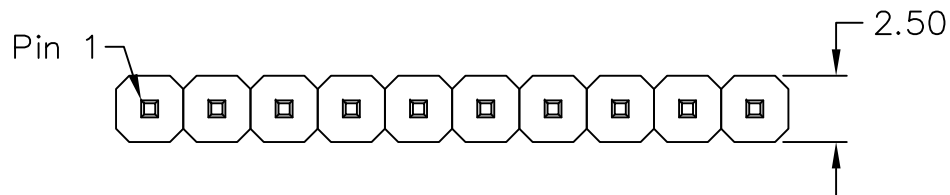


Recommended P.C.B Layout

MATERIAL

Insulator: Thermoplastic High Temp UL94-V0
Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Dielectric Voltage : AC 500V for one minute
Operating Temperature: -40°C to +105°C

210-x 1- xx x x K2
1 2 3 4 5 6

- 7: Green Product
9: Green Product High Temp
- 1: Single row
2: Dual rows
- No. of contacts per row
- G: Gold flash
- B: Black Insulator
W: White Insulator
- Pinrex internal code.

POLES	DIM E	POLES	DIM E
		21	50.80
2	2.54	22	53.34
3	5.08	23	55.88
4	7.62	24	58.42
5	10.16	25	60.96
6	12.70	26	63.50
7	15.24	27	66.04
8	17.78	28	68.58
9	20.32	29	71.12
10	22.86	30	73.66
11	25.40	31	76.20
12	27.94	32	78.74
13	30.48	33	81.28
14	33.02	34	83.82
15	35.56	35	86.36
16	38.10	36	88.90
17	40.64	37	91.44
18	43.18	38	93.98
19	45.72	39	96.52
20	48.26	40	99.06



				TOLERANCE				OLD PART NO.		TITLE		 频锐科技股份有限公司 PINREX TECHNOLOGY CORP.							
				.0 =±.30		UNITS : mm		DRAWER 姜文慧		CHECK 李劍			PIN HEADER 2.54*2.54mm STRAIGHT TYPE, SINGLE ROW						
				.00 =±.20															
				.000 =±.XXX															
A		RELEASE		2020/10/28		SCALE NONE		SIZE A4		SHEET 1 OF 1		REV. A		APP'D 李劍		NEW PART NO. 210-x1-xxxxK2		DRAW NO. 210-x1-xxxxK2(網頁專用圖)	
REV.		DESCRIPTION		DATE		ANG. =±3°													