
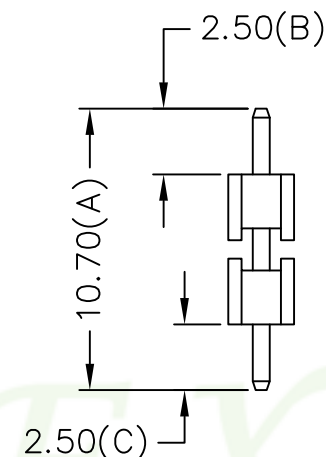


MATERIAL


Contact Pin : Brass
Insulator : PBT UL94-V0

SPECIFICATION

Current Rate : 3 AMP
Insulation Resistance : 5000M Ω Min. at DC 500V
Contact Resistance : 20m Ω Max. at DC 100mA
Dielectric Voltage : AC 500V for one minute
Operation Temperature : -40°C to + 105°C

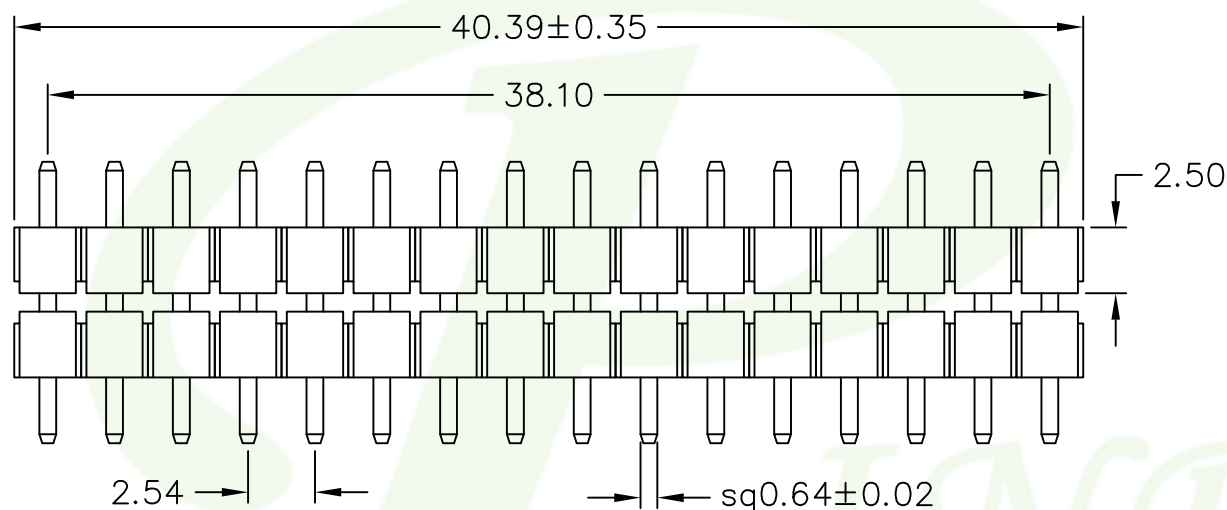

21N-x 1- xx x x xx
1 2 3 4 5 6

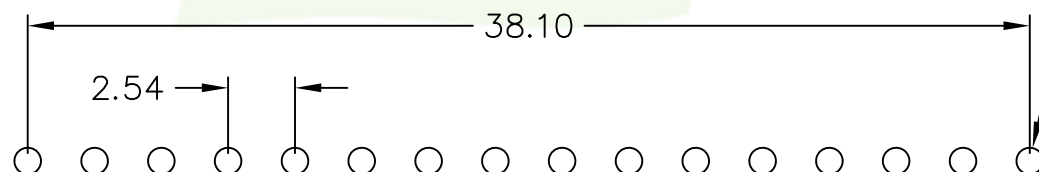

Recommended P.C.B Layout

1. 7: Green Product
9: Green Product High Temp
2. 1: Single row
2: Dual rows
3. No. of contacts per row
4. G: Gold flash
5. B: Black Insulator
6. Pinrex internal code.



			TOLERANCE		UNITS : mm		OLD PART NO.		TITLE		 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
			.0 =±.30						PIN HEADER 2.54*2.54mm		
			.00 =±.20				DRAWER 姜文慧	CHECK 李劍	STRAIGHT TYPE, SINGLE ROW		
			.000 =±.XXX						OPPOSITE INSULATORS		
A	RELEASE	2020/10/27	.0000=±.		SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. A	APP'D 李劍	NEW PART NO. 21N-x1-xxxxxx	DRAW NO. 21N-x1-xxxxxx(網頁專用圖)
REV.	DESCRIPTION	DATE	ANG.=±3'								