
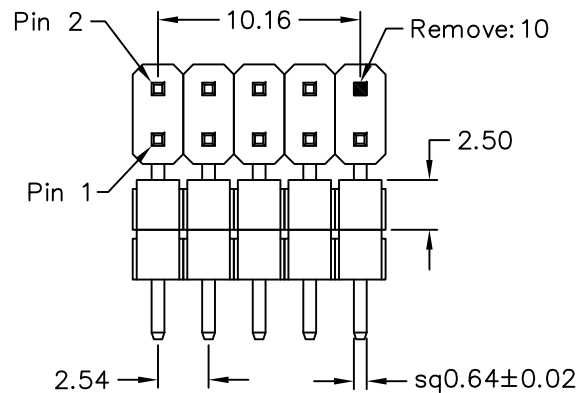



Recommended P.C.B Layout

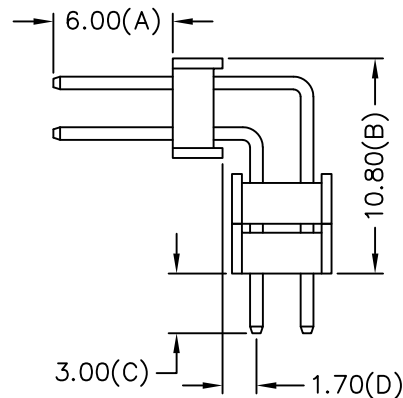

MATERIAL

Insulator : 30% Glass fiber PBT UL94-V0
Contact Pin : Brass


SPECIFICATION

Current Rate : 3 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Dielectric Voltage : AC 500V for one minute
Operation Temperature : -40°C to + 105°C

21P-x 2- xx x x xx
1 2 3 4 5 6

1. 5: Normal parts
- 7: Green Product
- 9: Green Product High Temp
2. 1: Single row
- 2: Dual rows
3. No. of contacts per row
4. G: Gold flash
- S: Selective
- T: Tin plated
5. B: Black Insulator
6. Pinrex internal code.



			TOLERANCE		 UNITS : mm	OLD PART NO.		TITLE PIN HEADER 2.54*2.54mm RIGHT ANGLE TYPE, DUAL ROWS TRIPLE INSULATORS		 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
			.0	=±.30		DRAWER	CHECK			
			.00	=±.20		麦文慧	李剑			
			.000	=±.XXX						
A	RELEASE	2020/10/27	.0000=±.			SHEET	REV.	APP'D	NEW PART NO.	DRAW NO.
REV.	DESCRIPTION	DATE	ANG.=±3'		SCALE NONE	SIZE A4	1 OF 1	A	21P-x2-xxxxxx	21P-x2-xxxxxx(網頁專用圖)