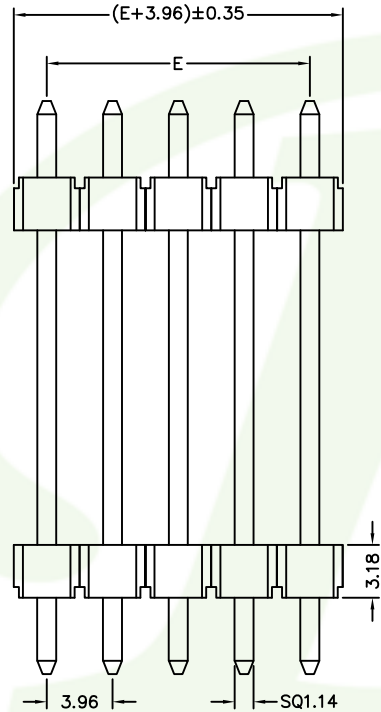
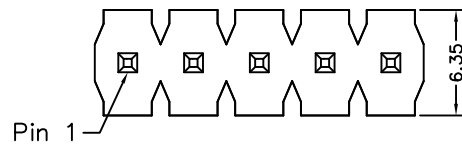


MATERIAL

Insulator : Thermoplastic High Temp UL94-V0

Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature: -40°C to +105°C

27A-x 1- xx x x xx
1 2 3 4 5 6

- 7: Green Product
- 9: Green Product High Temp
- 1: Single row
- No. of contacts per row
- G: Gold flash
T: Tin plated
- B: Black Insulator
- Pinrex internal code.

POLES	DIM E	POLES	DIM E
		13	47.52
2	3.96	14	51.48
3	7.62	15	55.44
4	11.88	16	59.40
5	15.84	17	63.36
6	19.80	18	67.32
7	23.76	19	71.28
8	27.72	20	75.24
9	31.68	21	79.20
10	35.64	22	83.16
11	39.60	23	87.12
12	43.56	24	91.08