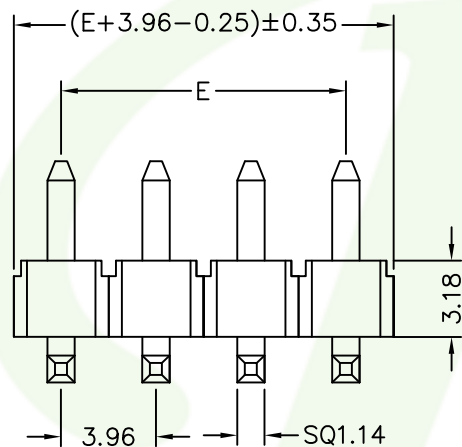
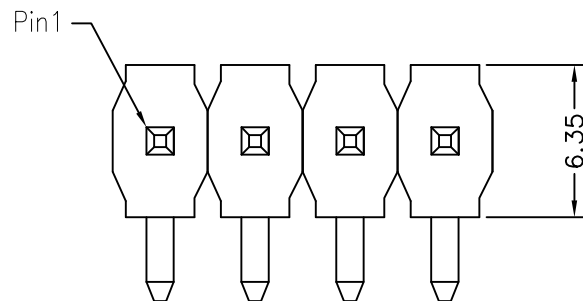


Recommended P.C.B Layout

MATERIAL

Contact Pin : Brass

Insulator : Thermoplastic High Temp UL94-V0

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

27E-x 1- xx x x xx
1 2 3 4 5 6

- 7: Green Product
- 9: Green Product High Temp
- 1: Single row
- No. of contacts
- G: Gold flash
T: Tin plated
- B: Black Insulator
- Pinrex internal code.

POLES	DIM E	POLES	DIM E
		23	91.08
2	7.92	24	95.04
3	11.88	25	99.00
4	15.84	26	102.96
5	19.80	27	106.92
6	23.76	28	110.88
7	27.72	29	114.87
8	31.68	30	118.80
9	35.64	31	122.76
10	39.60	32	126.72
11	43.56	33	130.68
12	47.52	34	134.64
13	51.48	35	138.60
14	55.44	36	142.56
15	59.40	37	146.52
16	63.36	38	150.48
17	67.32	39	154.44
18	71.28	40	158.40
19	75.24		
20	79.20		
21	83.16		
22	87.12		



REV.	DESCRIPTION	DATE
A	RELEASE	2020/10/29

SCALE	SIZE
NONE	A4

OLD PART NO.	DRAWER	CHECK
	麦文慧	李劍
SHEET	REV.	APP'D
1 OF 1	A	李劍

TITLE	NEW PART NO.
PH3.96 H=3.18 W=6.35 RIGHT ANGLE TYPE, DUAL ROWS	27E-x1-xxxxxx

DRAW NO.	頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
27E-x1-xxxxxx(網頁專用圖)	