
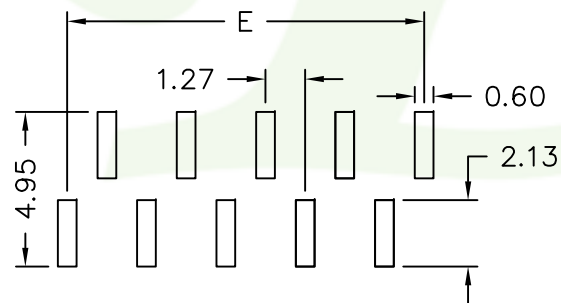
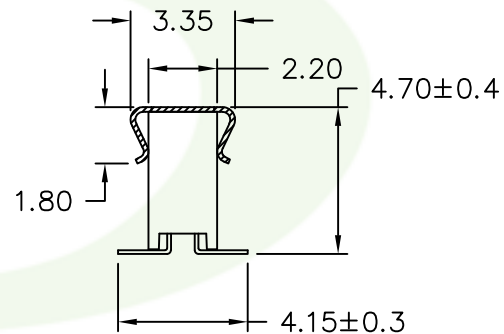
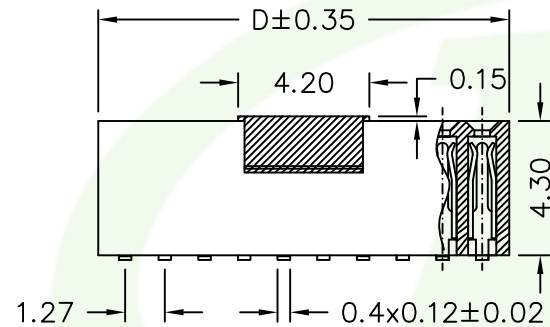


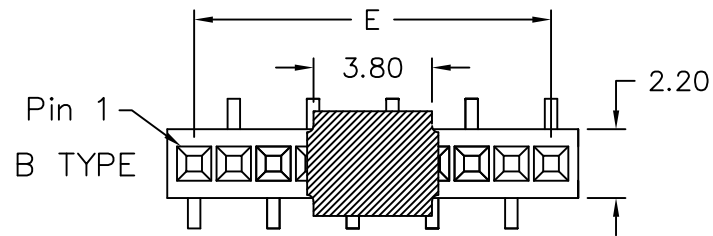

B TYPE

Recommended P.C.B Layout

MATERIAL

Contact Pin : Phosphor Bronze

Insulator : Thermoplastic High Temp UL94-V0

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Voltage : AC 500V for one minute

638-x 1- xx x x xx
1 2 3 4 5 6

1. 5: Normal Parts
- 7: Green Product
- 9: Green Product High Temp
2. 1: Single row
3. No. of contacts per row
4. G: Gold flash
S: Selective
T: Tin plated
5. B: Black Insulator
6. Pinrex internal code.

文管中心
2020.11.05
發行章

POLES	DIM D	DIM E	POLES	DIM D	DIM E	POLES	DIM D	DIM E
2	3.00	1.27	19	24.59	22.86	36	46.18	44.45
3	4.27	2.54	20	25.86	24.13	37	47.45	45.72
4	5.54	3.81	21	27.13	25.40	38	48.72	46.99
5	6.81	5.08	22	28.40	26.67	39	49.99	48.26
6	8.08	6.35	23	29.67	27.94	40	51.26	49.53
7	9.35	7.62	24	30.94	29.21	41	52.53	50.80
8	10.62	8.89	25	32.21	30.48	42	53.80	52.07
9	11.89	10.16	26	33.48	31.75	43	55.07	53.34
10	13.16	11.43	27	34.75	33.02	44	56.34	54.61
11	14.43	12.70	28	36.02	34.29	45	57.61	55.88
12	15.70	13.97	29	37.29	35.56	46	58.88	57.15
13	16.97	15.24	30	38.56	36.83	47	60.15	58.42
14	18.24	16.51	31	39.83	38.10	48	61.42	59.69
15	19.51	17.78	32	41.10	39.37	49	62.69	60.96
16	20.78	19.05	33	42.37	40.64	50	63.96	62.23
17	22.05	20.32	34	43.64	41.91			
18	23.32	21.59	35	44.91	43.18			

P 频锐科技股份有限公司
PINREX TECHNOLOGY CORP.

DRAW NO. 638-x1-xxxxxx(網頁專用圖)

REV.	DESCRIPTION	DATE	TOLERANCE
			.0 =±.30
			.00 =±.20
			.000 =±.XXX
			.0000=±.
			ANG.=±3'
A	RELEASE	2020/10/29	

UNITS : mm	
SCALE	SIZE
NONE	A4

OLD PART NO.	
DRAWER	CHECK
麦文慧	李剑
SHEET	REV.
1 OF 1	A
APP'D	李剑

TITLE
FEMALE HEADER 1.27*1.27mm
SMT TYPE, SINGLE ROW
HEIGHT 4.3mm, CAP+TUBE
NEW PART NO.
638-91-xxGBB1