
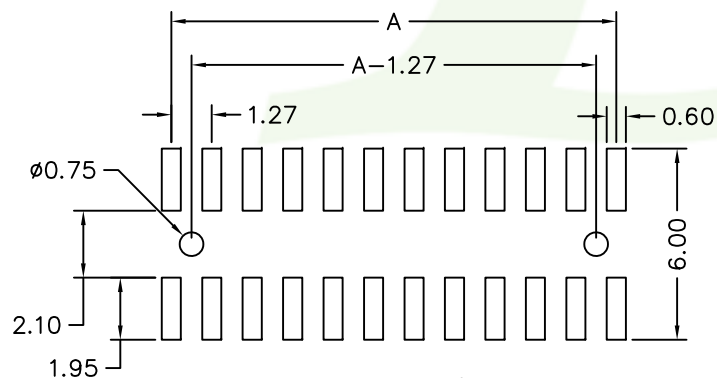
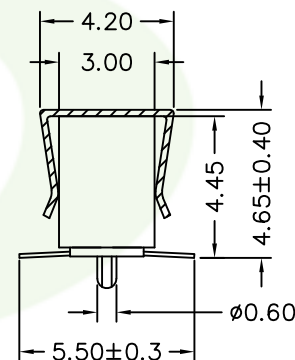
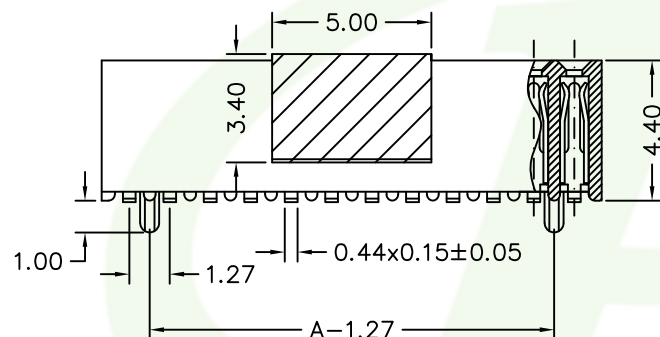


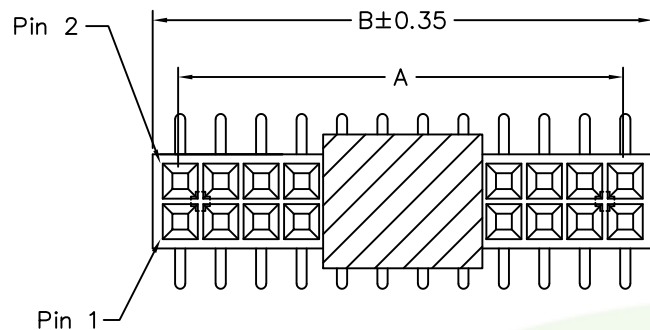

Recommended P.C.B Layout

MATERIAL

Contact Pin : Phosphor Bronze

Insulator : Thermoplastic High Temp UL94-V0

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

638-x 2- xx x x xx
1 2 3 4 5 6

- 7: Green Product
- 9: Green Product High Temp
- 2: Dual rows
- No. of contacts per row
- G: Gold flash
- T: Tin plated
- B: Black Insulator
- W: White Insulator
- Pinrex internal code.

文管中心
2020.10.30
發行章

POLES	DIM A	DIM B	POLES	DIM A	DIM B	POLES	DIM A	DIM B
2	1.27	3.00	19	22.86	24.59	36	44.45	46.18
3	2.54	4.27	20	24.13	25.86	37	45.72	47.45
4	3.81	5.54	21	25.40	27.13	38	46.99	48.72
5	5.08	6.81	22	26.67	28.40	39	48.26	49.99
6	6.35	8.08	23	27.94	29.67	40	49.53	51.26
7	7.62	9.35	24	29.21	30.94	41	50.80	52.53
8	8.89	10.62	25	30.48	32.21	42	52.07	53.80
9	10.16	11.89	26	31.75	33.48	43	53.34	55.07
10	11.43	13.16	27	33.02	34.75	44	54.61	56.34
11	12.70	14.43	28	34.29	36.02	45	55.88	57.61
12	13.97	15.70	29	35.56	37.29	46	57.15	58.88
13	15.24	16.97	30	36.83	38.56	47	58.42	60.15
14	16.51	18.24	31	38.10	39.83	48	59.69	61.42
15	17.78	19.51	32	39.37	41.10	49	60.96	62.69
16	19.05	20.78	33	40.64	42.37	50	62.23	63.96
17	20.32	22.05	34	41.91	43.64			
18	21.59	23.32	35	43.18	44.91			

TOLERANCE			UNITS : mm		OLD PART NO.		TITLE		DRAW NO.	
.0	=±.30		SCALE	SIZE	SHEET	REV.	APP'D	NEW PART NO.		
.00	=±.20		NONE	A4	1 OF 1	A	李劍	638-x2-xxxxxx		
.000	=±.XXX									
.0000=±.										
ANG.=±3'										
A	RELEASE	2020/10/30								
REV.	DESCRIPTION	DATE								

频锐科技股份有限公司
PINREX TECHNOLOGY CORP.

638-x2-xxxxxx(網頁專用圖)