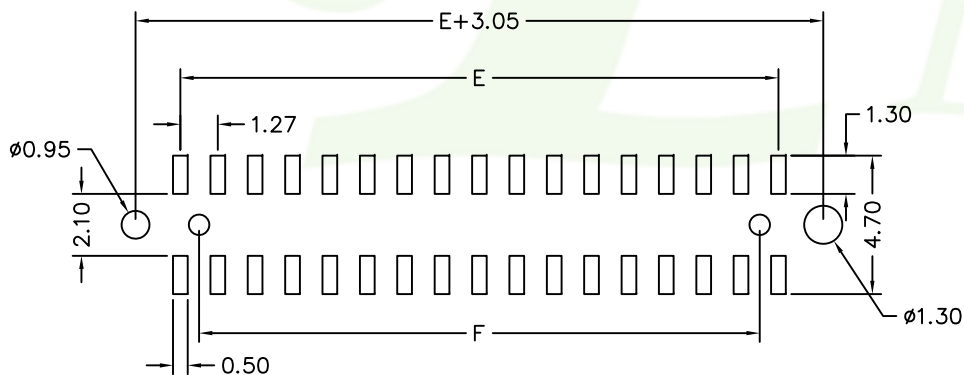

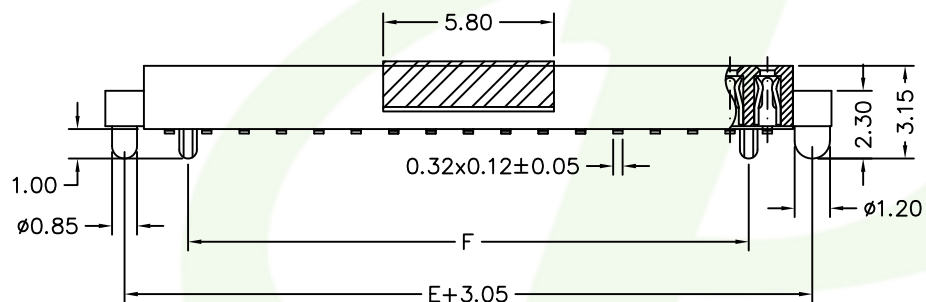
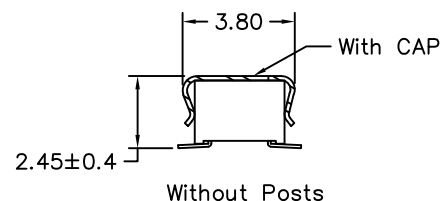
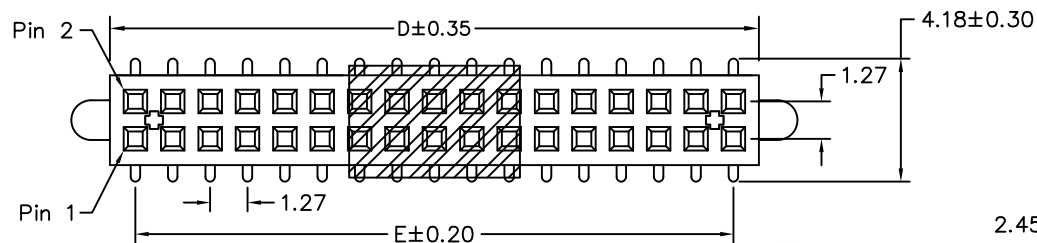


Recommended P.C.B Layout

MATERIAL

Contact Pin : Phosphor Bronze

Insulator : Thermoplastic High Temp UL94-V0

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Voltage : AC 500V for one minute

632-x 2- xx x x xx
1 2 3 4 5 6

- 7: Green Product
- 9: Green Product High Temp
- 2: Dual rows
- No. of contacts per row
- G: Gold flash
- T: Tin plated
- B: Black Insulator
- Pinrex internal code.
- 00: Without posts
- 01: Side posts
- 02: Bottom posts
- Ex: CAP+Tape & Reel
- Bx: CAP+Tube

文管中心
2020.11.06
發行章

POLES	DIM D	DIM E	DIM F	POLES	DIM D	DIM E	DIM F	POLES	DIM D	DIM E	DIM F
3	4.27	2.54	1.27	19	24.59	22.86	21.59	35	44.91	43.18	41.91
4	5.54	3.81	2.54	20	25.86	24.13	22.86	36	46.18	44.45	43.18
5	6.81	5.08	3.81	21	27.13	25.40	24.13	37	47.45	45.72	44.45
6	8.08	6.35	5.08	22	28.40	26.67	25.40	38	48.72	46.99	45.72
7	9.35	7.62	6.35	23	29.67	27.94	26.67	39	49.99	48.26	46.99
8	10.62	8.89	7.62	24	30.94	29.21	27.94	40	51.26	49.53	48.26
9	11.89	10.16	8.89	25	32.21	30.48	29.21	41	52.53	50.80	49.53
10	13.16	11.43	10.16	26	33.48	31.75	30.48	42	53.80	52.07	50.80
11	14.43	12.70	11.43	27	34.75	33.02	31.75	43	55.07	53.34	52.07
12	15.70	13.97	12.70	28	36.02	34.29	33.02	44	56.34	54.61	53.34
13	16.97	15.24	13.97	29	37.29	35.56	34.29	45	57.61	55.88	54.61
14	18.24	16.51	15.24	30	38.56	36.83	35.56	46	58.88	57.15	55.88
15	19.51	17.78	16.51	31	39.83	38.10	36.83	47	60.15	58.42	57.15
16	20.78	19.05	17.78	32	41.10	39.37	38.10	48	61.42	59.69	58.42
17	22.05	20.32	19.05	33	42.37	40.64	39.37	49	62.69	60.96	59.69
18	23.32	21.59	20.32	34	43.64	41.91	40.64	50	63.96	62.23	60.96

TOLERANCE			UNITS : mm		OLD PART NO.		TITLE		P 频锐科技股份有限公司 PINREX TECHNOLOGY CORP.
.0	±.30		SCALE	SIZE	SHEET	REV.	APP'D	NEW PART NO.	
.00	±.20		NONE	A4	1 OF 1	A	李劍	632-x2-xxxxxx	632-x2-xxxxxx(網頁專用圖)
.000	±.XXX								
.0000	±.								
ANG.	±3'								
REV.	DESCRIPTION	DATE							
A	RELEASE	2020/10/29							