
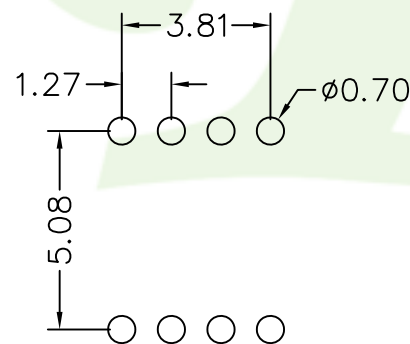
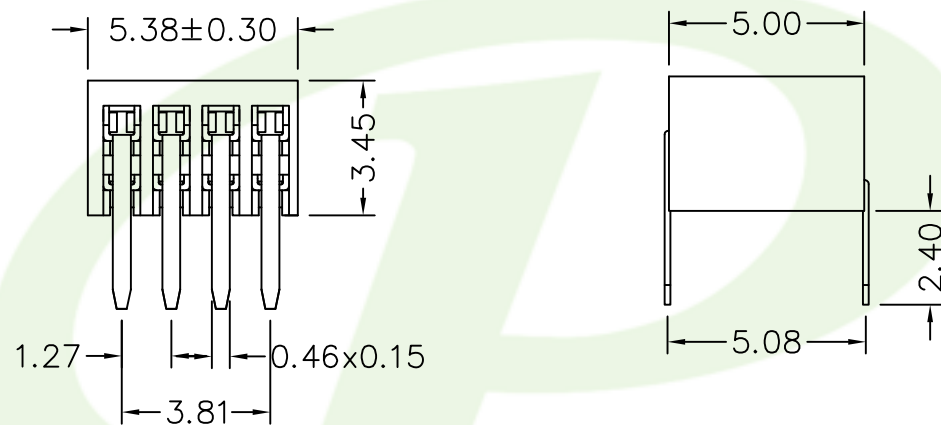


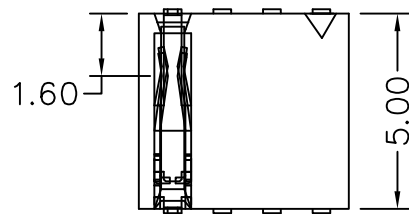

Recommended P.C.B Board
SMD Layout

Current Rating: 1 Amps
Insulator Resistance: 5000 Megohms min
Contact Resistance: 20 m ohms max
Dielectric Withstanding: AC 500 V
Operating Temperature: - 40° ~ +125° C
Max Processing Temp: 230° C for 60 seconds
260° C for 10 seconds
Contact Material: Phosphor Bronze
Insulator Material: Polyester, UL 94V-0
Standard: L.C.P
Finish: Tin, Gold Plated
Standard: Gold Flash all over nickel

63B-x 2- xx x x xx
1 2 3 4 5 6

- 7: Green Product
- 9: Green Product High Temp
- 1: Single row
- 2: Dual rows
- No. of contacts per row
- G: Gold flash
- T: Tin plated
- B: Black Insulator
- Pinrex internal code.