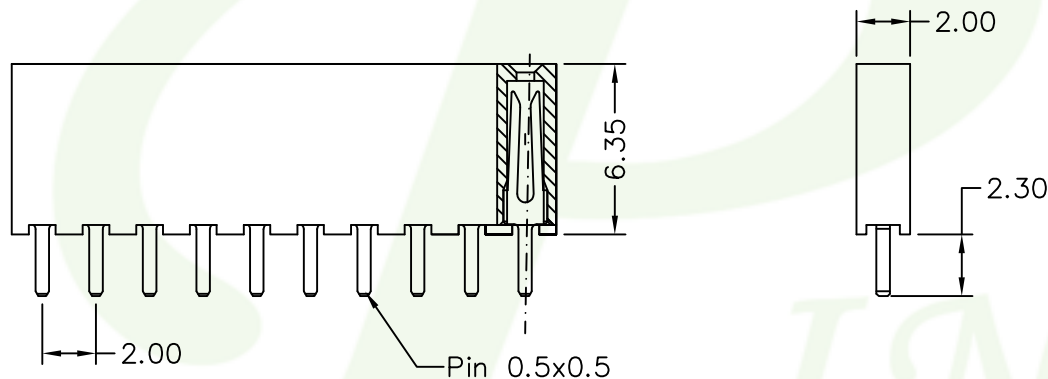
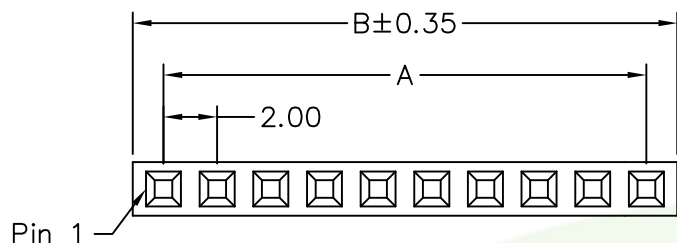


Recommended P.C.B Layout

MATERIAL

Contact Pin : phosphor Bronze
Insulator : PBT UL94-V0

SPECIFICATION

Current Rate : 2 AMP
Insulation Resistance : 1000MΩMin.
Contact Resistance : 20mΩMax.
Dielectric Voltage : 500VAC

624-x 1- xx x x xx
1 2 3 4 5 6

- 5: Normal parts
7: Green Product
9: Green Product High Temp
- 1: Single row
2: Dual rows
- No. of contacts per row
- G: Gold flash
T: Tin plated
S: Selective
- B: Black Insulator
W: White Insulator
- Series number

No. of PIN/ROW	Dimension Information	
	A	B
02	2.00	4.30
03	4.00	6.30
04	6.00	8.30
05	8.00	10.30
06	10.00	12.30
07	12.00	14.30
08	14.00	16.30
09	16.00	18.30
10	18.00	20.30
11	20.00	22.30
12	22.00	24.30
13	24.00	26.30
14	26.00	28.30
15	28.00	30.30
16	30.00	32.30
17	32.00	34.30
18	34.00	36.30
19	36.00	38.30
20	38.00	40.30
21	40.00	42.30
22	42.00	44.30
23	44.00	46.30
24	46.00	48.30
25	48.00	50.30
26	50.00	52.30
27	52.00	54.30
28	54.00	56.30
29	56.00	58.30
30	58.00	60.30
31	60.00	62.30
32	62.00	64.30
33	64.00	66.30
34	66.00	68.30
35	68.00	70.30
36	70.00	72.30
37	72.00	74.30
38	74.00	76.30
39	76.00	78.30
40	78.00	80.30



			TOLERANCE		 UNITS : mm	OLD PART NO.		TITLE FEMALE HEADER 2.0*2.0mm STRAIGHT TYPE, SINGLE ROW HEIGHT 6.35mm	 频锐科技股份有限公司 PINREX TECHNOLOGY CORP	
			.0 =±.30 .00 =±.20 .000 =±.XXX .0000=±. ANG.=±3°			DRAWER 麦文慧 CHECK 李剑				
A	RELEASE	2020/11/05			SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. A	APP'D 李剑	NEW PART NO. 624-x1-xxxxxx
REV.	DESCRIPTION	DATE							DRAW NO. 624-x1-xxxxxx(網頁專用圖)	

DRAW NO. 624-x1-xxxxxx(網頁專用圖)